

PRICE LIST ENERGY PRODUCTS




INSULATION & PROTECTION
CABLE ACCESSORIES
SOLAR CONNECTOR
CABLE MANAGEMENT SOLUTION
CONNECTOR & FITTINGS
ENCLOSURES
SAFETY PRODUCTS
SERVICE OFFERINGS

Effective from 1st July, 2025

WELCOME TO RAYCHEM RPG

Raychem RPG (P) Ltd., incorporated in 1989, is a 50:50 Joint Venture between TE Connectivity, U.S.A. and RPG Enterprises, India. It is one of the longest running successful joint ventures in India for over 36 years.

Built on foundation of trust and traditions, Raychem RPG is involved in engineering solutions and services. Pioneering smart products and technologies, the company caters to the infrastructure segment of multiple business industries.

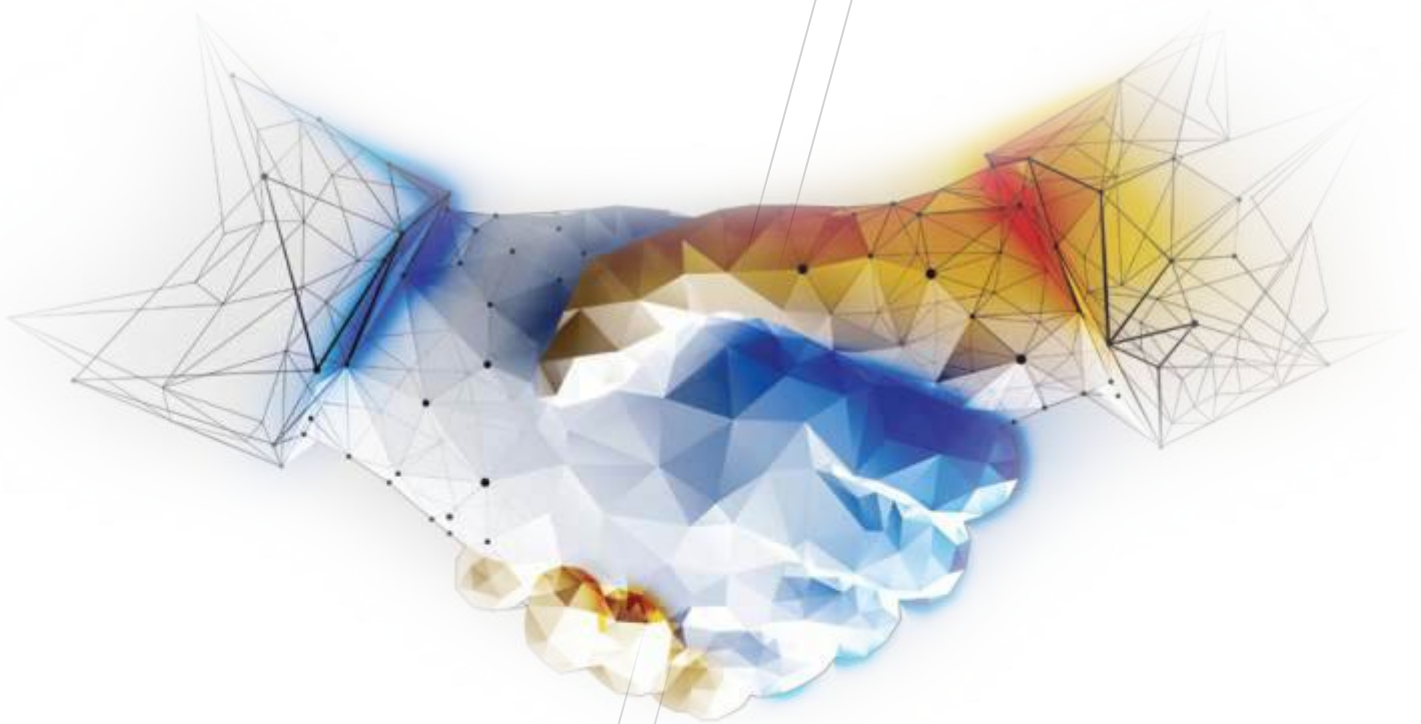

OUR VISION

Reliable Connections. Always...

Whether powering a home or enabling a sector or energizing an industry, our products and solutions form an integral part of systems and play a vital role in shaping the daily lives and driving progress for communities and nations. With each product and solution, we pave the path for a better future.

OUR MISSION

To deliver exceptional value to all stakeholders by fostering collaboration, agility and innovation

We will prioritize collaboration, agility, and innovation as core values. It implies a commitment to delivering exceptional value to stakeholders through a culture of trust & commitment, teamwork, adaptability, and innovation.



CORE VALUES



Focus on Customers

Customer-first approach drives our business success.



Transparency

Communicate openly and demonstrate integrity in all activities.



Stakeholder Appreciation

Develop a committed and responsive community of Employees, Distributors and Vendors.



Performance Recognition

Demonstrate passion for performance through anticipation, speed and flexibility.



Rewarding Growth

Embrace growth and productivity through innovation and entrepreneurship.



Sustainability

Protect the environment and contribute to the society around us.

CONTENT

INSULATION &
PROTECTION

01-12

LOW VOLTAGE
CABLE
ACCESSORIES

15-21

MEDIUM
VOLTAGE CABLE
ACCESSORIES

22-45

HIGH VOLTAGE
CABLE
ACCESSORIES

47

EXTRA HIGH
VOLTAGE CABLE
ACCESSORIES

48-49

SOLAR
CONNECTOR

50

CABLE
MANAGEMENT
SOLUTION

52-57

CONNECTORS - LUGS,
FERRULE & OVERHEAD
SOLUTIONS

59-78

ENCLOSURES

80-92

SAFETY
PRODUCTS

95-141

SERVICE
OFFERINGS

143-148

DISCONTINUED
PRODUCT

150

GENERAL TERMS &
WARRANTY POLICY

151

Get the **Smart Installation** Service Edge!

Aimed at maximizing productivity, conserving energy, minimizing costs, and enhancing safety, our Raychem RPG Cable Accessories Installation Service have benefitted many Industries & Power Distribution Companies in the last two decades.

So gain the advantage of professional services, Installation of Raychem RPG Energy products.



For more information please
contact the nearest regional office.

We go the extra mile!



Explore Our Product Range

Please contact the nearest branch office for information on the following products:

Energy Products

Insulation and Protection

- Medium Voltage Covered Conductor (MVCC)

Connectors and Fittings

- Railway Connector
- Transformer Connector

Other Products


Earthing and Lightning Protection Systems

Transgormer

- Oil Filled transformers
- Dry Type transformer

Domestic Gas Meters

- Mechanical Gas Meters
- Smart Gas Meters




INSULATION & PROTECTION



HEAT-SHRINKABLE TUBES

Heat-Shrinkable Busbar Insulation Tubing MODEL BPTM

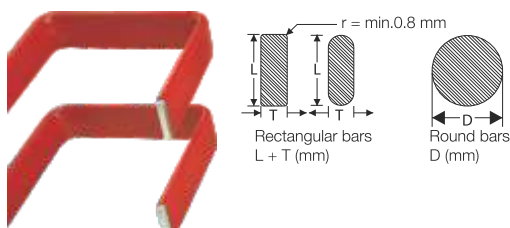


- Suitable for voltage upto 25 kV, application ϕ 6.5-150 mm
- Excellent flexibility can be installed on a wide range of curved or bent busbars without cracking or creasing
- Exceptional insulation and long term reliability even at high continuous operating temperature
- Good thermal emissivity and contact with busbars means no derating is required
- Excellent anti-tracking properties
- Flame retardant and non-halogen based material

Model	Size-Expanded/Recovered (in mm)	* Rectangular bars ϕ L + T (in mm) (min. - max.)	* Round bars ϕ D (in mm) (min. - max.)	# Roll Length (in meter)	PCN	List Price (INR) Per Meter
BPTM	15/6	12-18	6.5-12	30	JAA0090009	1064
	30/12	22-38	13.5-25	30	JAA0090327	1266
	50/20	36-65	22-43	30	JAA0090328	1822
	75/30	55-95	33-63	20	JAA0090329	2610
	100/40	70-130	44-86	25	JAA0090324	3534
	120/50	90-165	55-105	25	JAA0090325	5592
	175/70	125-235	80-150	15	JAA0090326	9322

* To be used on the busbar sizes

Supplied In continuous length

Heat-Shrinkable Busbar Insulation Tubing MODEL RBPM

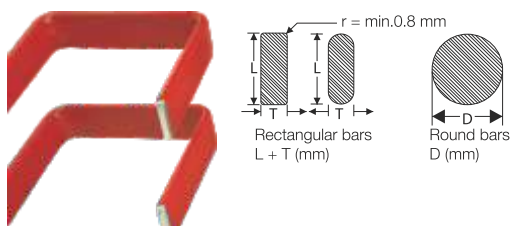

- Suitable for voltage upto 25 kV, application ϕ 6.5-150 mm
- Excellent flexibility can be installed on a wide range of curved or bent busbars without cracking or creasing
- Exceptional insulation and long term reliability even at high continuous operating temperature
- Good thermal emissivity and contact with busbars means no derating is required
- Excellent anti-tracking properties
- Flame retardant material


Model	Size-Expanded/Recovered (in mm)	* Rectangular bars ϕ L + T (in mm) (min. - max.)	* Round bars ϕ D (in mm) (min. - max.)	# Roll Length (in meter)	PCN	List Price (INR) Per Meter
RBPM	30/12	22-38	13.5-25	30	DGA6000004	658
	50/20	36-65	22-43	30	DGA6000001	892
	75/30	55-95	33-63	20	DGA6000002	1288
	100/40	70-130	44-86	25	DGA6000003	1732
	120/50	90-165	55-105	25	DGA6000011	3580
	175/70	125-235	80-150	15	DGA6000009	4600

* To be used on the busbar sizes

Supplied In continuous length

HEAT-SHRINKABLE TUBES

Heat-Shrinkable Busbar Insulation Tubing MODEL BBIT

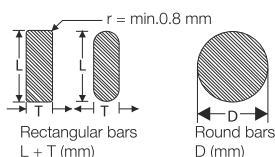

- Suitable for voltage upto 36 kV, application $\varnothing$ 11-125 mm
- Excellent flexibility can be installed on a wide range of curved or bent busbars without cracking or creasing
- Exceptional insulation and long term reliability even at high continuous operating temperature
- Good thermal emissivity and contact with busbars means no derating is required
- Excellent anti-tracking properties
- Flame retardant and non-halogen based material

Model	Size- Expanded/ Recovered (in mm)	* Rectangular bars $\varnothing$ L + T (in mm) (min. - max.)	* Round bars $\varnothing$ D (in mm) (min. - max.)	# Roll Length (in meter)	PCN	List Price (INR) Per Meter
BBIT	25/10	17-18	11-20	25	AAA9000006	3080
	40/16	28-45	18-32	20	JAA0090322	3640
	65/25	44-69	28-47	15	JAA0090323	3832
	100/40	69-102	44-72	15	JAA0090320	5760
	150/60	102-148	65-105	15	JAA0090002	9208
	175/80	133-196	85-125	10	JAA0090321	16486

* To be used on the busbar sizes

Supplied In continuous length

Medium Wall Insulating Uncoated Tube MODEL MWTM



- Medium-wall low voltage insulation and core protection tubing up to medium voltage
- Suitable for general sealing and re-jacketing of insulated cables
- 3:1 shrink ratio with high shelf life
- REACH and RoHS compliant

Model	Size- Expanded/ Recovered (in mm)	Cable Use Range (min. - max.) (in mm)	# Roll Length (in meter)	PCN	List Price (INR) Per Meter
MWTM	10/3	3-9	40	AAA0000905	626
	16/5	6-14	40	JAA0010323	636
	25/8	9-22	40	JAA0010331	662
	35/12	13-32	30	JAA0010334	720
	50/16	17-43	25	JAA0010336	966
	85/25	25-74	20	JAA0010342	2842
	115/34	36-99	20	JAA0010319	5512
	140/42	46-119	20	JAA0010321	5624

Supplied In continuous length

HEAT-SHRINKABLE TUBES

Outer Protection Insulating Coated Tube MODEL WCSM



- Thick-wall low voltage insulation and outer sealing tubing
- Available inline coated with hot melt adhesive
- High material hardness with semi rigid flexibility
- 3:1 shrink ratio with high shelf life
- REACH and RoHS compliant

Model	Size- Expanded/ Recovered (in mm)	Cable Use Range (min. - max.) (in mm)	PCN	List Price (INR) Per Meter
WCSM	24/6	6.5-22	JAA0010403	2206
	33/8	9-31	JAA0010404	2426
	48/12	13-44	JAA0010405	2450
	56/16	17.5-50	JAA0010407	2500
	90/25	27-81	JAA0010410	4274
	130/35	38-118	JAA0010396	11356
	160/50	55-144	JAA0010400	11686
	180/50	55-162	JAA0010402	12076

Note : Supplied in standard length of 1500mm

HEAT-SHRINKABLE WRAPAROUND SLEEVE

Cable Outer Jacket Repair Sleeve MODEL IRJ



- Suitable for Standard Poly or elastomeric insulated cables
- Fast & Labour saving installation
- Moisture vapor transmission barrier
- Fitting and sealing all in one step
- Abrasion and corrosion resistant

Model	Cable Outer Dia (in mm)	Length (in mm)	PCN	List Price (INR) Per Meter
IRJ	10-40	525	AAA9000042	778
	10-40	700	AAA9000043	1074
	24-56	700	AAA9000044	1634
	32-82	910	AAA9000046	2950
	40-110	965	AAA9000047	3916
	57-145	1100	AAA9000049	4742
	57-145	1500	AAA0135009	6532

MEDIUM VOLTAGE LINE COVER

Medium Voltage Line Cover MODEL MVLC

- Presenting the pre-engineered Medium Voltage Line Covers MVLC Retrofit Solution.
- MVLC provide state-of-the-art insulation to help prevent electrical outages caused by trees or wildlife or civil structure coming into contact with distribution lines.
- It can be applied selectively on problem area such as distribution lines passing very closely to any civil structure, cyclone or natural calamity prone region, forest, etc.
- It is made up of a cross-linked material to create an extremely robust insulation system, ensuring many years of reliable operation in the harshest environments.



- Three sizes cover wide range of conductors from 16-800 Sq. mm.
- Cost-effective solution no need of replacing conductor & line hardware
- UV stable as well as tracking and erosion resistant
- REACH and RoHS Complaint

Model	Size (in mm.)	System Voltage (kV)	Spool length (in meter)	PCN	List Price (INR) Per Meter
MVLC (Coated)	14-A/241	33kV	100	JAA0010285	3534
	18-A/241		75	JAA0010286	4174
	38-A/241		50	AAA9764007	6374

MEDIUM VOLTAGE CONDUCTOR COVERS

Medium Voltage Conductor Covers MODEL MVCC



- Suitable for applications up to 25 kV phase to ground
- Protection for leads and jumpers Four sizes are available and will fit conductors with diameters up to 44 mm (1.75")
- Made from a non-tracking silicone material
- Superior tracking resistance
- Simple, quick, tool free and wrap around installation

Model	Description	Use Range UOM: mm (Inches)	Supplied Length UOM: M	PCN	List Price (INR) Per Meter
MVCC - Grey Colour	MVCC-G-19/.75 x 15	11 [0.45] - 19 [0.75]	1 Piece - 15 Mtr	AJA7050029	51478
	MVCC-G-25/1.0 x 9	19 [0.75] - 28 [1.125]	1 Piece - 09 Mtr	AJA7050024	42862
	MVCC-G-45/1.75 x 9	28 [1.125] - 44 [1.75]	1 Piece - 09 Mtr	AJA7050022	54664

RIGID RED BARRIER BOARD

Rigid Red Barrier Board MODEL RRBB



- Excellent tracking-resistant properties provide longevity
- Innovative cross-linking polymer withstands power-arcs without compromising its physical shape
- High temperature resistant
- Superior tracking resistance
- The use of RRBB barriers allows switchgear cabinets to be protected against interphase flashovers that can be caused by contaminants, moisture, and animals
- The RRBB board is made from a homogenous polymer & has excellent track resistance, especially following a power-arc

Model	Catalog Number	Supplied Length	Thickness	Ordering Code	List Price (INR) Per No.
RRBB	RRBB- 2050/775-5-B	775 x 2050 MM	5 MM	AAA9063002	250824

INSULATING COVERS

Bus/Bushing Connection Insulating Covers MODEL BCIC



- Designed to protect energized conductors or busbars from flashovers due to contact with birds, squirrels, and other wildlife
- BCIC parts are made from a UV-stable, track-resistant, high performance material to ensure years of reliable service
- A variety of different shapes and sizes are available to cover circuit breaker bushings, bus standoff insulators, capacitors, transformer bushings, voltage regulators, potential transformers and more
- Installation can be made quickly in the field by trimming the entry and exit holes to the required dimensions
- The BCIC covers can be re-entered for other maintenance needs and then reused, thus lowering overall lifetime costs

* For price please contact the nearest regional office.

HEAT SHRINKABLE TAPE

Busbar Insulation Tape MODEL HVBT



- A single layer of tape with two-third overlapped is suitable for 17.5 kV AC voltage and dual layer for 36 kV AC voltage
- Wide operating temperature -40°C to 90°C
- Excellent thermal emissivity means no busbar derating is required
- Adhesive-coating produce a complete lap to lap seal
- Non-Adhesive to metal or porcelain, allowing easy removal for maintenance

Model	Description	Tape Width (in mm.)	PCN	List Price (INR) Per Meter
HVBT	12-A	25	AAB0000369	882
	14-A	50	AAB0000370	1770
	15-A	75	AAB0000371	3886
	16-A	100	AAB0000372	4154

Note : Supplied in standard roll length of 10 meter

COLD APPLIED TAPE

Medium Voltage Fusion Tape MODEL MVFT




- Silicone self-amalgamating fusion tape
- A single layer of tape with two-third overlapped is suitable for 15 kV AC voltage and dual layer for 35 kV AC voltage
- Wide operating temperature 0 C to 90 C
- Designed to combine the integrity of a Silicone polymer with the versatility of a wraparound product
- It sticks to itself and other insulating materials, it will not adhere to metal or porcelain allowing easy removal for maintenance
- Offers easy installation over a wide variety of shapes including complex connections

Model	Tape Width (in mm.)	PCN	List Price (INR) Per Meter
MVFT	50	JAP0050006	466

Note : Supplied in standard roll length of 10 meter

COLD APPLIED BOOT

Elastomeric Insulating Bushing Boot MODEL SE-CAB, E-CAB & CAB

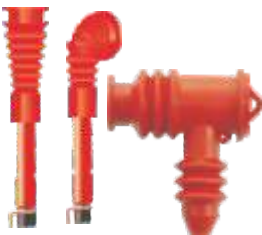

- Easy tool free installation
- One product for straight and right angle application
- Ideal for switchgear and transformer cable boxes
- Non-tracking elastomeric housing having high erosion resistance

Model	System Voltage (kV)	Cable Size (Sq. mm)	PCN	List Price (INR) Per Set
SE-CAB	11kV	25-400	AAA9066009	4184
E-CAB			AAA9000032	3972
CAB			AAA9000030	4150

* One set contain 3 Nos.

HEAT SHRINKABLE END CAP

Cable End Sealing Caps



- Suitable for all cable types
- High resistance to moisture, fungus and weathering
- Suitable for underwater and underground application

Model	Cable Outer Dia Range (in mm)	PCN	List Price (INR) Per Set
Cable End Caps	4-8	DBA0060309	42
	8-17	DBA0060269	70
	15-30	DBA0060226	116
	25-50	DBA0060289	226
	35-70	DBA0060147	394
	45-95	DBA0060148	526
	70-105	DBA0060149	652
	90-150	DBA0060531	1414
	130-220	DBA0060532	1648



Prevent accidents, Ensure safety -

Trust our Insulating Covers for high voltage connections



**Tried & Tested solutions
for extreme field conditions**

Raysulat
Electrical Insulation Enhancement Solution

Bus / Bushing Connection Insulating Covers - BCIC

- Designed to protect energized conductors or busbars from flashovers due to contact with birds, squirrels, and other wildlife. BCIC parts are made from a UV-stable, track-resistant, high-performance material to ensure years of reliable service in the harshest environments
- A variety of different shapes and sizes are available to cover circuit breaker bushings, bus standoff insulators, capacitors, transformer bushings, voltage regulators, potential transformers, and more. Installation can be made quickly in the field by trimming the entry and exit holes to the required dimensions
- The BCIC covers can be reentered for other maintenance needs and then reused, Thus lowering overall lifetime costs

Why wait? Contact us now.

Follow us on:     

SURGE ARRESTERS & ACCESSORIES

Indoor Distribution High Class (DH) Class 1 - Model **DA1**



- Conforms to IEC 60099-4
- Range from 3kV to 15kV
- Distribution High Class (DH) (Class 1)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	PCN	List Price (INR)
3.3 kV	4kV, 10kA	Distribution High (DH) (Class 1)	DA1 (Housing A - 147mm creepage)	AJA1010380	4064
6.6 kV	6kV, 10kA			AJA1010381	4630
	7.2kV, 10kA			AJA1010440	4722
11 kV	10kV, 10kA			AJA1010382	5088
	12kV, 10kA			AJA1010377	5536
	15kV, 10kA		DA1(Housing B- 172mm creepage)	AJA1010378	6256

Indoor Station Low Class (SL) Class 2 - MODEL **MCPA2**



- Conforms to IEC 60099-4
- Range from 3kV to 15kV
- Station Low Class (SL) (Class 2)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	PCN	List Price (INR)
3.3 kV	3kV, 10kA	Station Low (SL) (Class 2)	MCPA2 (Housing A - 147mm creepage)	AJA1010383	5218
6.6 kV	6kV, 10kA			AJA1010384	5428
	7.2kV, 10kA			AJA1010493	5496
11 kV	9kV, 10kA			AJA1010385	6282
	12kV, 10kA			AJA1010386	6612
	15kV, 10kA		MCPA2 (Housing B- 172mm creepage)	AJA1010387	8652

SURGE ARRESTERS & ACCESSORIES

Indoor Station Medium Class (SM) Class 3 - Model PCA



- Conforms to IEC 60099-4
- Range from 6kV to 36kV
- Station Medium Class (SM) (Class 3)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	PCN	List Price (INR)
6.6 kV	6kV, 10kA	Station Low (SL) (Class 3)	PCA (Housing 0 - 208mm creepage)	AJA1090142	16542
11 kV	9kV, 10kA			AJA1090143	17730
	12kV, 10kA			AJA1090144	19432
	15kV, 10kA		PCA (Housing 1 - 377mm creepage)	AJA1090145	21994
22 kV	18kV, 10kA			AJA1090146	27476
33 kV	30kV, 10kA			AJA1090150	22284
	36kV, 10kA			AJA1090152	31376

Note: all indoor station class surge arrester models are without bracket and disconnector.

Outdoor Distribution High Class (DH) Class 1 - Model DOV



- Conforms to IEC 60099-4
- Range from 3kV to 36kV
- Distribution High Class (DH) (Class 1)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	Surge Arrester PCN	List Price (INR)	Surge Arrester with Bracket PCN	List Price (INR)	Surge Arrester with Bracket and disconnector PCN	List Price (INR)
11 kV	9kV, 10kA	Class DH	DOV (Housing type A - 405 mm creepage)	AJA1100206	5948	AJA1100240	7340	AJA1100241	7958
	12kV, 10kA			AJA1100207	6626	AJA1100192	7554	AJA1100198	9194
	15kV, 10kA			AJA1100242	8704	AJA1100243	8534	AJA1100244	13442
22 kV	18kV, 10kA		DOV (Housing type B - 697 mm creepage)	AJA1100208	10970	AJA1100245	12284	AJA1100246	13288
33 kV	30kV, 10kA		DOV (Housing type D - 945 mm creepage)	AJA1100209	13904	AJA1100247	16150	AJA1100248	18232
	36kV, 10kA		DOV (Housing type E - 1128 mm creepage)	AJA1100249	16764	AJA1100250	18514	AJA1100199	19132

SURGE ARRESTERS & ACCESSORIES

Outdoor Station Low Class (SL) Class 2 - Model OCP2



- Conforms to IEC 60099-4
- Range from 6kV to 45kV
- Station Low Class (SL) (Class 2)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Cage Construction: Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	Surge Arrester PCN	List Price (INR)	Surge Arrester with Bracket PCN	List Price (INR)	Surge Arrester with Bracket and disconnector PCN	List Price (INR)
11 kV	10kV, 10kA	Station Low (SL) (Class 2)	OCP2 (Housing type S- 380mm creepage)	AJA1050357	7272	AJA1050412	11124	AJA1050390	11974
22 kV	18kV, 10kA		OCP2 (Housing type L- 758mm creepage)	AJA1050422	13340	AJA1050600	15218	AJA1050742	15862
33 kV	30kV, 10kA		OCP2 (Housing type L- 900mm creepage)	AJA1050380	13332	AJA1050385	16874	AJA1050423	21502
	36kV, 10kA		OCP2 (Housing type M- 970mm creepage)	AJA1050402	18680	AJA1050586	22738	AJA1050403	23408
	38.75kV, 10kA			AJA1050621	22378	AJA1050514	24052	AJA1050743	24926
	45kV, 10kA			AJA1050537	24548	AJA1050447	26780	AJA1050744	27424
	36kV, 10kA		OCP2 (Housing type ML- 1125mm creepage)	AJA1050362	21598	AJA1050388	25380	AJA1050657	23510

Outdoor Station Low Class (SL) Class 2 - Model PAA



- Conforms to IEC 60099-4
- Range from 60kV to 216kV
- Station Low Class (SL) (Class 2)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Cage Construction : Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	Terminal Type	Surge Arrester PCN	List Price (INR)	Remarks
66 kV	60kV, 10kA	Station Low (SL) (Class 2)	PAA11 (1940mm creepage)	Surge arrester with base and L5 terminal connector	AJA1070192	52054	SA with base and L5 terminal connector
110 kV	96kV, 10kA		PAA333 (3837mm creepage)		AJA1070358	78524	
132 kV	120kV, 10kA				AJA1070332	97258	

SURGE ARRESTERS & ACCESSORIES

Outdoor Distribution Medium Class (SM) Class 3 - Model PCA



- Conforms to IEC 60099-4
- Range from 6kV to 216kV
- Station Low Class (SL) (Class 3)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Cage Construction: Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	Terminal Type	Surge Arrester PCN	List Price (INR)	Remarks
11kV	9kV, 10kA	Station Medium (SM) (Class 3)	PCA1 (1100mm creepage)	Surge arrester with base and L2 terminal connector	AJA1090107	39682	SA with base and L2 terminal connector
33kV	30kV, 10kA			Surge arrester with base and L5 terminal connector	AJA1090007	48294	SA with base and L5 terminal connector
	36kV, 10kA		AJA1090077		53318		
66kV	60kV, 10kA		PCA2 (1815mm creepage)		AJA1090012	84068	
110kV	96kV,10kA		PCA2L2L (3730mm creepage)		AJA1090031	190550	
132kV	120kV,10kA				AJA1090034	122358	
220kV	198kV, 10kA		PCA2L2L2L1 (6695mm creepage)		AJA1090037	238194	
	216kV,10kA				AJA1090040	310854	

Outdoor Distribution Class - Model PSO



- Conforms to IEC 60099-4
- Range 3kV to 9kV 5kA, LD 75A, 1000µSec
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Low residual Voltage

System Voltage	Rating	LD Class	Model	Surge Arrester PCN	List Price (INR)	Surge Arrester with Bracket PCN	List Price (INR)	Surge Arrester with Bracket and disconnector PCN	List Price (INR)
11kV	9 kV, 5kA	75A, 1000 µSec	PSO (DM) (300mm Creepage)	AGA6000016	4224	AGA6000017	5132	AGA6000025	5782

SURGE ARRESTERS & ACCESSORIES

Outdoor Distribution Medium Class (DM)- Model DA0



- Conforms to IEC 60099-4
- Range from 3kV to 18kV, LD 150A, 1000µSec, Distribution medium class
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Excellent cantilever and tensile performance

System Voltage	Rating	Model	LD Class	Surge Arrester PCN	List Price (INR)	Surge Arrester with Bracket PCN	List Price (INR)	Surge Arrester with Bracket and disconnector PCN	List Price (INR)
6.6 kV	6kV, 5kA	DA0 (320mm Creepage)	Distribution Medium (DM)	AJA1010355	1314	AJA1010640	3426	AJA1010641	3708
11 kV	9kV, 5kA			AJA1010411	2656	AJA1010356	3528	AJA1010350	3812
	12kV, 5kA			AJA1010428	3668	AJA1010401	4250	AJA1010642	4506
22 kV	18kV, 5kA			AJA1010359	5382	AJA1010484	6154	AJA1010358	7056

Surge Counter SC12



- No auxiliary supply required
- Weather proof sealed model
- High degree of resistance to corrosion

Surge Monitor SC13



- No auxiliary supply require
- Weather proof sealed model
- High degree of resistance to corrosion
- Leakage measurement scale for leakage current

Surge Monitor SC13AC



- No auxiliary supply required
- Weather proof sealed model
- High degree of resistance to corrosion
- Leakage measurement scale for leakage current
- With NO/NC contact

Surge Monitor SC003



- No auxiliary supply required
- Weather proof sealed model
- High degree of resistance to corrosion

Description	PCN	List Price (INR)
SC003 Surge Counter with Leakage current Indicator (0-5mA)	LBG0010018	17150
SC12 Surge Counter	LBG0010004	31950
SC13 Surge Counter with Leakage current Indicator (0-30mA)	LBG0010005	44812
SC13/AC Surge Counter with Leakage current Indicator and with auxiliary contact	LBG0010006	54650

WE'VE GOT YOU COVERED

COVERED CONDUCTORS FOR THE WORLD'S TOUGHEST ENVIRONMENTS



**Your trusted partner for safe
and reliable power transmission**

Raychem RPG covered conductors are built to stringent standards and helps customers in reducing unscheduled outages, electrical accidents and assist in ROW reduction.

- Suitable for system voltages up to 110 kV
- Cross section available up to 329 sqmm
- Conforms to EN 50397-1

Best in Class!

Why wait? Contact us now.

Follow us on: [!\[\]\(ee621e621b5c0e879ac45d7c8501b154_img.jpg\)](#) [!\[\]\(01e70393380f90fb452bbbb4c404684a_img.jpg\)](#) [!\[\]\(b33472e1aadd34c1013f00511d0e739b_img.jpg\)](#) [!\[\]\(1bd737cda1181784386c9dddbd86bc4c_img.jpg\)](#) [!\[\]\(6bbecf7167e2b9d92a88daf148819f36_img.jpg\)](#)

CABLE ACCESSORIES



LOW VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 1.1 kV Termination Kit - Model EPKT

- Conforms to - Generally as per IS 13573-1
- Suitable for voltage upto 1.1 kV, cable range of 4 - 630 Sq. mm.
- Suitable for PVC/XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type : Tubular
- Core Sleeve - Optional (reqd for outdoor purpose) - To be ordered out separately

Model	Cable Size (Sq. mm)	Termination Type	For 3.5 Core Cable		For 4 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
EPKT	4	Indoor/ Outdoor Termination	-	-	AAA4108004	2026
	6		AAA4109001	2000	AAA4109003	2026
	10		AAA4111001	2000	AAA4111003	2026
	16		AAA4113001	2000	AAA4113005	2026
	25		AAA4115003	2726	AAA4115008	2750
	35		AAA4117002	2726	AAA4117006	2750
	50		AAA4119001	2750	AAA4119005	2776
	70		AAA4121003	2900	AAA4121006	2728
	95		AAA4123001	2950	AAA4123005	3000
	120		AAA4125003	2976	AAA4125008	3076
	150		AAA4127001	3050	AAA4127006	3126
	185		AAA4129002	4376	AAA4129008	4526
	240		AAA4133002	4426	AAA4133015	4700
	300		AAA4135002	4726	AAA4135013	4926
	400		AAA4137003	5476	AAA4137011	5800
	500		AAA4139002	8150	AAA4139004	9150
	630		AAA4141004	8200	AAA4141008	9250

LOW VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 1.1 kV Termination Kit - Model SFKT

- Conforms to - Generally as per IS 13573-1
- Suitable for voltage upto 1.1 kV, cable range of 4 - 630 Sq. mm.
- Suitable for PVC/XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type : Tubular
- Core Sleeve - Optional (reqd for outdoor purpose) - To be ordered out separately

Model	Cable Size (Sq. mm)	Termination Type	For 3.5 Core Cable		For 4 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
SFKT	4	Indoor/ Outdoor Termination	-	-	-	-
	6		-	-	-	-
	10		-	-	AAA4111007	1176
	16		AAA4113024	804	AAA4113023	1150
	25		AAA4115015	1650	AAA4115013	1800
	35		AAA4117012	1726	AAA4117013	1800
	50		AAA4119016	1826	AAA6119002	1900
	70		AAA4121014	1850	AAA6121008	1900
	95		AAA4123012	1850	AAA4123013	1822
	120		AAA4125016	1950	AAA4125017	1746
	150		AAA4127012	1950	AAA4127015	2000
	185		AAA4129015	2500	AAA4129016	2600
	240		AAA4133025	2650	AAA4133026	2700
	300		AAA4135022	2876	AAA4135023	3026
	400		AAA4137019	3250	AAA4137015	3066
	500		AAA4139006	5776	AAA4139007	6676
	630		AAA4141006	5976	AAA4141007	7300

LOW VOLTAGE CABLE ACCESSORIES

Cold Applied (Insulation) Joint Kit

Straight Through Joint - Model RLVJ



- RLVJ kit comes with Cold Applied unique mastic coated insulating tape and Heat Shrinkable wraparound sleeve
- Suitable for voltage upto 1.1 kV, Seven sizes cover wide range of cable from 6-400 Sq. mm.
- Conforms to IS 13573-1 / EN 50393
- Suitable for XLPE / PVC Power Cables
- Connector Type - Al Crimp

Model	Earthing Braid Material	Aluminum		Tin plated Copper		Aluminum		Tin plated Copper	
	No. of Cable Core	3.5 Core				4 Core			
	Cable Size (Sq. mm)	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
RLVJ	6	AAA2109024	2676	-	-	AAA2109023	2850	AAA2109013	3526
	10	AAA2111025	2876	AAA2111008	3100	AAA2111026	3000	AAA2111012	3650
	16	AAA2113130	2664	AAA2113022	3200	AAA2113122	3100	AAA2113026	3776
	25	AAA2115077	3100	AAA2115025	3650	AAA2115079	3250	AAA2115031	3976
	35	AAA2117062	3150	AAA2117031	3700	AAA2117061	3266	AAA2117035	3822
	50	AAA2119058	3200	AAA2119024	3750	AAA2121067	3310	AAA2119030	3916
	70	AAA2121068	4350	AAA2121025	5000	AAA2121070	3612	AAA2121030	5594
	95	AAA2123049	4450	AAA2123022	5626	AAA2123056	4900	AAA2123030	5626
	120	AAA2125073	6126	AAA2125029	7276	AAA2125075	7376	AAA2125034	7506
	150	AAA2127070	6250	AAA2127025	8050	AAA2127071	7426	AAA2127029	8226
	185	AAA2129041	6326	AAA2129018	7950	AAA2129049	7500	AAA2129023	8326
	240	AAA2133062	6626	AAA2133024	7672	AAA2133064	8526	AAA2133029	7244
	300	AAA2135078	7676	AAA2135029	9426	AAA2135080	8374	AAA2135036	9576
	400	AAA2137043	10626	AAA2137021	13326	AAA2137049	13276	AAA2137025	13500

Note : For 1 and 3 core kit please contact the nearest regional office

LOW VOLTAGE CABLE ACCESSORIES

Cold Applied (Insulation) Joint Kit

Straight Through Joint - Model RLVC NEW



- Kit comes with Cold Applied unique mastic coated insulating tape and cold applied armour cast tape
- Suitable for voltage upto 1.1kV, Several sizes cover wide range of cable from 6-400 Sq.mm.
- Conforms to IS13573-1 / EN 50393
- Suitable for XLPE / PVC Power Cable
- Connector Type- Al Crimp
- Aluminium Earth braid

Model	Earthing Braid Material	Aluminum		Aluminum	
	No. of Cable Core	3.5 Core		4 Core	
	Cable Size (Sq. mm)	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
RLVC	6	EPALVM1002	900	EPALVM1016	1100
	10	EPALVM1003	1000	EPALVM1017	1265
	16	EPALVM1004	1045	EPALVM1018	1320
	25	EPALVM1005	1375	EPALVM1019	1705
	35	EPALVM1006	2365	EPALVM1020	2669
	50	EPALVM1007	2970	EPALVM1021	3274
	70	EPALVM1008	3575	EPALVM1022	3850
	95	EPALVM1009	3630	EPALVM1023	3905
	120	EPALVM1010	3685	EPALVM1024	3960
	150	EPALVM1011	3740	EPALVM1025	4070
	185	EPALVM1012	3824	EPALVM1026	4099
	240	EPALVM1013	3850	EPALVM1027	4125
	300	EPALVM1014	3879	EPALVM1028	4180
	400	EPALVM1015	5034	EPALVM1029	5335

Note : For 1 and 3 core kit please contact the nearest regional office

LOW VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

Straight Through Joint - Model EPKJ



- Conforms to IS 13573-1 / EN 50393
- Suitable for voltage upto 1.1 kV, cable range of 2.5 - 630 Sq. mm.
- Suitable for XLPE / PVC Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular

Model	No. of Cable Core	3.5 Core		4 Core	
	Cable Size (Sq. mm)	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
EPKJ	2.5	AAA2105006	1700	AAA2106082	2326
	4	AAA2108013	1700	AAA2108016	2650
	6	AAA2109006	1726	AAA2110012	3050
	10	AAA2112013	4076	AAA2112017	4300
	16	AAA2113006	4400	AAA2113011	4676
	25	AAA2115004	7926	AAA2115007	8226
	35	AAA2117004	8826	AAA2117007	9076
	50	AAA2119002	9150	AAA2119005	9426
	70	AAA2121004	12176	AAA2121006	12550
	95	AAA2123002	12350	AAA2123004	12750
	120	AAA2125004	12700	AAA2125006	13000
	150	AAA2127004	12826	AAA2127006	13126
	185	AAA2129004	20176	AAA2129007	21550
	240	AAA2133004	23500	AAA2133008	22650
	300	AAA2135005	23800	AAA2135009	24500
	400	AAA2137005	24300	AAA2137007	25050
	500	-	-	AAA2139006	25400
	630	AAA2441005	26250	-	-

Note: For 1, 2 & 3 core kit please contact the nearest regional office

Straight Through Joint - Model SFKJ

- Conforms to IS 13573-1 / EN 50393
- Suitable for voltage upto 1.1 kV, cable range of 4 - 500 Sq. mm.
- Suitable for XLPE / PVC Power Cables
- Built-in Al earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular

Model	No. of Cable Core	3.5 Core		4 Core	
	Cable Size (Sq. mm)	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
SFKJ	4	-	-	AAA2107009	700
	6	-	-	AAA2109032	750
	10	-	-	AAA2111033	1150
	16	AAA2113124	950	AAA2113141	1200
	25	AAA2115091	1250	AAA2115090	1550
	35	AAA2117075	2150	AAA2117074	2426
	50	AAA2119069	2700	AAA2119068	2976
	70	AAA2121081	3250	AAA2121007	3500
	95	AAA2123068	3300	AAA2123067	3550
	120	AAA2125087	3350	AAA2125086	3600
	150	AAA2127011	3400	AAA2127088	3700
	185	AAA2129062	3476	AAA2129006	3726
	240	AAA2133079	3500	AAA2133078	3750
	300	AAA2135102	3526	AAA2135101	3800
	400	AAA2137056	4576	AAA2137055	4850
	500	AAA2139009	6800	AAA2139008	7600

Note: For 1, 2 & 3 core kit please contact the nearest regional office



Ensure your network reliability with smart **Rayvolve** RVSJ kits

Applications

- **Direct burial** distribution network applications
- Connections to **secondary network protection devices**
- Joint covers for connections in **street lighting circuits**
- Cable connection for **overhead bundled cable**

Convenience - Easy, Tool-free installation

- Thanks to the smart dual-wall design with an entrapped lubricant, making installation without any special tools
- Hassel free installation without need of gas or electric heating devices
- The Rayvolve sleeve rolls quickly and easily onto the cable. No more need of time-consuming taping

Performance

- Suitable for voltage upto 1.1 kV, cable from 25-400 Sq. mm.
- Conforms to EN 50393
- Suitable for XLPE / PVC Power Cables
- Available in Connector Type - Al Crimp or Al Mechanical
- Sleeve type : Armour cast tape

Reliable & Repeatable

- The gripping force of the specially formulated EPDM elastomer combines with a high-performance sealant to form a reliable, water & dirt resistant, insulating sleeve.
- The pre-engineered wall thickness of the Rayvolve sleeve assures consistent field installations. Compared to conventional tape, where insulation is dependent on The number of layers applied



Model	Connector Type No. of Cable Core Cable Size (Sq. mm)	Al Mechanical			
		3.5 Core		4 Core	
		PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
RVSJ-M1	25	-	-	AAA2115099	10600
RVSJ-M2	35	-	-	AAA2121087	12076
	50-70	AAA2121088	12076		
RVSJ-M3	95-150	AAA2127100	14450	AAA2127099	14626
RVSJ-M4	185-300	AAA2135115	24350	AAA2135114	26750

Model	Connector Type No. of Cable Core Cable Size (Sq. mm)	Al Mechanical			
		3.5 Core		4 Core	
		PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
RVSJ-M1	25	-	-	AAA2115097	6676
RVSJ-M2	35	-	-	AAA2117076	7976
	50	AAA2119074	8150	AAA2119073	8200
RVSJ-C3	70	AAA2121086	8976	AAA2121085	9076
	95	AAA2123073	9150	AAA2123072	9276
RVSJ-C4	120	AAA2125091	9976	AAA2125090	10026
	150	AAA2127098	10726	AAA2127097	10850
	185	AAA2129064	11276	AAA2129063	11400
RVSJ-C5	240	AAA2133082	12826	AAA2133081	12876
	300	AAA2135113	13576	AAA2135112	13650
RVSJ-C6	400	AAA2137059	13926	AAA2137058	14126

Note: For 1 and 3 core kit please contact the nearest regional office

Easy, "roll-on" way to insulate and seal cable connections up to 1.1kV

Follow us on:



LOW VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

Straight Through Joint - Model ECKJ



- Conforms to IS 13573-1 / EN 50393
- Suitable for voltage upto 1.1 kV, cable range of 1.5 & 2.5 Sq. mm
- Suitable for Multicore Control Cables
- Built-in tin plated Cu earthing braid
- Connector Type - Cu Crimp
- Sleeve type: Tubular

Model	Cable Size (Sq. mm)	1.5 Sq. mm		2.5 Sq. mm	
	No. of Cable Core	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
ECKJ	2	AAA2104001	3850	AAA2106012	3876
	3	AAA2104003	3950	AAA2106014	3976
	4	AAA2104005	4026	AAA2106016	4050
	5	AAA2104008	4076	AAA2106018	4100
	6	AAA2104011	4126	AAA2106022	4150
	7	AAA2104012	4126	AAA2106023	4150
	8	AAA2104023	4250	AAA2106030	4276
	9	-	-	AAA2106031	4326
	10	AAA2104015	4400	AAA2106024	4426
	12	AAA2104017	4600	AAA2106026	4650
	14	AAA2104020	4750	AAA2106027	4776
	16	AAA2104068	6676	AAA2106032	6700
	19	AAA2104025	6876	AAA2106035	6900
	20	-	-	AAA2106037	7200
	21	AAA2104028	7426	AAA2106038	7450
	24	AAA2104029	7500	AAA2106040	7526
	27	AAA2104030	7776	AAA2106044	7800
	30	AAA2104032	8050	AAA2106045	8076
	32	-	-	AAA2106046	8426
	37	AAA2104035	8776	AAA2106047	8826
	40	AAA2103010	9150	AAA2106048	9176
	48	AAA2104038	10426	-	-
	50	-	-	AAA2106051	11050
	61	AAA2104041	11626	-	-
	75	AAA2104043	12176	AAA2106052	12200

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor/Outdoor 11kV Termination Kit - Model EPKT-S & EPKT-C



- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve Type: Tubular

Model		EPKT-S				EPKT-C			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (Sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3417018	3476	AAA4417048	4404	AAA3417017	3000	AAA4417047	9626
50		AAA3419013	3500	AAA4419050	10250	AAA3419012	3026	AAA4419047	9676
70		AAA4421056	3726	AAA4421055	10400	AAA3421013	3050	AAA4421054	9776
95		AAA3423021	3876	AAA4423083	10626	AAA3423020	3226	AAA4423082	10050
120		AAA3425020	3950	AAA4425086	11426	AAA3425019	3276	AAA4425085	10550
150		AAA3427020	4000	AAA4427077	11550	AAA3427019	3326	AAA4427076	10726
185		AAA3429020	4250	AAA4429134	12950	AAA3429019	3426	AAA4429133	11026
240		AAA3433027	4626	AAA4433129	13676	AAA3433026	3700	AAA4433128	11500
300		AAA3435028	4726	AAA4435155	14100	AAA3435027	4076	AAA4435153	12176
400		AAA3437032	5176	AAA4437090	15750	AAA3437031	4376	AAA4437088	14300
500		AAA3439029	5500	-	-	AAA3439028	4900	-	-
630		AAA3441049	7076	-	-	AAA3441048	5826	-	-
800		AAA3443013	7450	-	-	AAA3443012	6400	-	-
1000		AAA3445034	8356	-	-	AAA3445033	7750	-	-
35	Outdoor Termination	AAA5417009	4550	AAA6417053	14026	AAA5417008	4300	AAA6417052	14026
50		AAA5419013	5626	AAA6419043	17776	AAA5419012	4326	AAA6419042	14150
70		AAA5421013	5876	AAA6421046	17850	AAA5421012	4350	AAA6421045	14200
95		AAA5423029	6050	AAA6423076	18126	AAA5423028	4526	AAA6423075	13738
120		AAA5425023	6126	AAA6425079	18926	AAA5425022	4600	AAA6425078	15026
150		AAA5427017	6176	AAA6427060	19050	AAA5427016	4600	AAA6427059	15176
185		AAA5443004	6226	AAA6429093	20276	AAA5429014	4726	AAA6429092	15450
240		AAA5433017	6576	AAA6433085	21026	AAA5433016	5226	AAA6433084	16626
300		AAA5435012	6750	AAA6435119	21426	AAA5435011	5524	AAA6435117	17326
400		AAA5437011	7176	AAA6437059	23100	AAA5437010	5926	AAA6437058	19876
500		AAA5439009	7226	-	-	AAA5439008	6226	-	-
630		AAA5441015	8900	-	-	AAA5441014	7176	-	-
800		AAA5443005	10150	-	-	AAA5443003	8126	-	-
1000		AAA5445017	10780	-	-	AAA5445016	9476	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor/Outdoor 11kV Termination Kit - Model EPKT-C-CU



- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Cu Crimp
- Sleeve type: Tubular

Model		EPKT-C-CU			
		For 1 Core Cable		For 3 Core Cable	
Cable Size (Sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3418008	3076	AAA4418031	7264
50		AAA3420007	3150	AAA4420026	9926
70		AAA3422008	3250	AAA4422025	10250
95		AAA3424009	3576	AAA4424039	11250
120		AAA3426010	3826	AAA4426027	11850
150		AAA3428011	4250	AAA4428026	12134
185		AAA3430019	4326	AAA4430040	13876
240		AAA3434015	5826	AAA4434035	18076
300		AAA3436017	5614	AAA4436021	16656
400		AAA3438019	7450	AAA4438015	23700
500		AAA3440019	8826	-	-
630		AAA3442017	10690	-	-
800		AAA3444006	15376	-	-
1000		AAA3446005	23100	-	-
35	Outdoor Termination	AAA5418002	4376	AAA6418009	14100
50		AAA5420001	4476	AAA6420015	14400
70		AAA5422003	4626	AAA6422012	14750
95		AAA5424006	4900	AAA6424018	15750
120		AAA5426003	5176	AAA6426005	16850
150		AAA5428005	5626	AAA6428013	18226
185		AAA5430006	5700	AAA6430022	18376
240		AAA5434008	7500	AAA6434016	23576
300		AAA5436008	8216	AAA6436010	23976
400		AAA5438006	9150	AAA6438008	29576
500		AAA5440014	10226	-	-
630		AAA5442009	13076	-	-
800		AAA5444003	17276	-	-
1000		AAA5446001	25026	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor/Outdoor 11kV Termination Kit - Model HVT-M



- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular

Indoor/Outdoor 11kV Termination Kit - Model HST



- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular

Model		HVT-M				HST			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (Sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3417019	2572	AAA4417049	7140	AAA3417020	1734	AAA4417054	4868
50		AAA3419014	2626	AAA4419051	7220	AAA3419016	1816	AAA4419054	5226
70		AAA3421015	2652	AAA4421057	5388	AAA3421016	1844	AAA4421059	5300
95		AAA3423022	2704	AAA4423084	6910	AAA3423024	1954	AAA4423093	5390
120		AAA3425021	2758	AAA4425087	7428	AAA3425022	1980	AAA4425096	5428
150		AAA3427021	2836	AAA4427078	7928	AAA3427022	2008	AAA4427083	5556
185		AAA3429021	2968	AAA4429135	8010	AAA3429024	2146	AAA4429145	5694
240		AAA3433028	3412	AAA4433130	8090	AAA3433030	2228	AAA4433137	5776
300		AAA3435029	3466	AAA4435156	8886	AAA3435030	2476	AAA4435171	6160
400		AAA3437033	3754	AAA4437091	10710	AAA3437034	2778	AAA4437098	7344
500		AAA3439030	4306	-	-	AAA3439036	3108	-	-
630		AAA3441051	4966	-	-	AAA3441057	3658	-	-
800		AAA3443014	5408	-	-	AAA3443018	4016	-	-
1000		AAA3445035	6826	-	-	AAA3445038	5254	-	-
35	Outdoor Termination	AAA5417010	3360	AAA6417054	9450	AAA5417012	2310	AAA6417058	6600
50		AAA5419014	3412	AAA6419044	9556	AAA5419016	2422	AAA6419047	6710
70		AAA5421014	3466	AAA6421047	8850	AAA5421016	2476	AAA6421049	6940
95		AAA5423030	3492	AAA6423077	8830	AAA5423033	2586	AAA6423083	7344
120		AAA5425024	3570	AAA6425080	9040	AAA5425026	2640	AAA6425083	7400
150		AAA5427018	3676	AAA6427061	10264	AAA5427021	2668	AAA6427065	7564
185		AAA5429015	3754	AAA6429094	10850	AAA5429018	2806	AAA6429097	7610
240		AAA5433018	4462	AAA6433086	11324	AAA5433019	2916	AAA6433090	7650
300		AAA5435013	4516	AAA6435120	12140	AAA5435015	3080	AAA6435127	8086
400		AAA5437012	4648	AAA6437060	13702	AAA5437013	3202	AAA6437064	9268
500		AAA5439010	5146	-	-	AAA5439015	3824	-	-
630		AAA5441016	5932	-	-	AAA5441018	4318	-	-
800		AAA5443006	6538	-	-	AAA5443008	4896	-	-
1000		AAA5445018	7980	-	-	AAA5445020	6188	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 22kV Termination Kit - Model EPKT-S & EPKT-C



- Conforms to IS 13573-2
- Suitable for voltage upto 22 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular
- Indoor & Outdoor both versions come with rain skirts

Model		EPKT-S				EPKT-C			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (Sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3617009	4650	AAA4617012	14250	AAA3617010	3876	AAA4617013	12750
50		AAA3619007	4676	AAA4619017	14300	AAA3619009	3900	AAA4619018	12750
70		AAA3621010	4700	AAA4621017	14950	AAA3621011	3950	AAA4621018	13376
95		AAA3623014	4900	AAA4623038	15076	AAA3623015	4076	AAA4623039	13526
120		AAA3625013	5150	AAA4625033	16976	AAA3625014	3896	AAA4625034	14200
150		AAA3627012	5250	AAA4627023	17326	AAA3627013	4576	AAA4627024	15750
185		AAA3629013	5326	AAA4629035	17600	AAA3629015	4626	AAA4629036	16126
240		AAA3633021	5500	AAA4633037	19450	AAA3633022	4778	AAA4633038	16888
300		AAA3635028	5576	AAA4635059	19976	AAA3635029	4876	AAA4635060	17476
400		AAA3637025	6450	AAA4637031	21126	AAA3637026	5168	AAA4637032	18476
500		AAA3639017	7376	-	-	AAA3639018	6126	-	-
630		AAA3641027	8376	-	-	AAA3641028	7076	-	-
800		AAA3643010	8776	-	-	AAA3643011	7626	-	-
1000		AAA3645013	10900	-	-	AAA3645014	9626	-	-
35	Outdoor Termination	AAA5617003	6576	AAA6617010	21076	AAA5617004	4750	AAA5617002	16400
50		AAA5619003	6650	AAA6619014	21126	AAA5619004	4826	AAA6619015	16450
70		AAA5621004	6700	AAA6621018	21226	AAA5621005	4876	AAA6621019	17076
95		AAA5623006	6926	AAA6623026	21376	AAA5623007	4976	AAA6623027	17200
120		AAA5625006	7226	AAA6625024	23550	AAA5625007	5076	AAA6625025	18576
150		AAA5627004	7326	AAA6627019	23900	AAA5627005	5194	AAA6627020	20450
185		AAA3629014	7476	AAA6629032	24250	AAA5629003	5826	AAA6629033	20800
240		AAA5633006	7600	AAA6633026	26100	AAA5633007	6050	AAA6633027	22100
300		AAA5635006	7676	AAA6635040	26150	AAA5635007	6100	AAA6635041	22176
400		AAA5637005	8376	AAA6637023	26950	AAA5637006	6682	AAA6637024	22400
500		AAA5639007	10250	-	-	AAA5639008	7600	-	-
630		AAA5641007	11250	-	-	AAA5641008	8604	-	-
800		AAA5643003	11650	-	-	AAA5643004	9526	-	-
1000		AAA5645010	13726	-	-	AAA5645011	11076	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 22kV Termination Kit - Model EPKT-C-CU



- Conforms to IS 13573-2
- Suitable for voltage upto 22 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Cu Crimp
- Sleeve type: Tubular

Model		EPKT-C-CU			
Cable Size (Sq. mm)	Termination Type	For 1 Core Cable		For 3 Core Cable	
		PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3618003	3950	AAA4618005	12750
50		AAA3620006	4050	AAA4620005	13000
70		AAA3622007	4176	AAA4622010	14150
95		AAA3624009	4400	AAA4624009	14700
120		AAA3626006	5076	AAA4626012	16026
150		AAA3628008	5500	AAA4628008	18726
185		AAA3630011	5526	AAA4630016	18976
240		AAA3634007	7000	AAA4634014	24026
300		AAA3636008	7000	AAA4636021	25276
400		AAA3638012	7218	AAA4638006	27850
500		AAA3640008	10176	-	-
630		AAA3642010	12650	-	-
800		AAA3644003	17000	-	-
1000		AAA3646003	25026	-	-
35	Outdoor Termination	AAA5618001	4876	AAA6618003	16400
50		AAA5620002	4950	AAA6620006	16676
70		AAA5622001	5100	AAA6622005	17800
95		AAA5624005	5350	AAA6624008	18376
120		AAA5626002	6350	AAA6626007	20700
150		AAA5628003	6800	AAA6628007	23650
185		AAA5630006	6826	AAA6630003	23950
240		AAA5634002	7568	AAA6634007	28976
300		AAA5636009	8726	AAA6636008	30876
400		AAA5638006	9650	AAA6638003	31876
500		AAA5640005	11800	-	-
630		AAA5642003	14526	-	-
800		AAA5644001	18500	-	-
1000		AAA5646001	26526	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 22kV Termination Kit - Model HVT-M



- Conforms to IS 13573-2
- Suitable for voltage upto 22 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular
- Indoor & Outdoor both versions come with rain skirts

Model		HVT-M			
Cable Size (Sq. mm)	Termination Type	For 1 Core Cable		For 3 Core Cable	
		PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3617011	3440	AAA4617014	10552
50		AAA3619008	3466	AAA4619019	10606
70		AAA3621012	3492	AAA4621019	10920
95		AAA3623016	3938	AAA4623040	11026
120		AAA3625015	4280	AAA4625035	11090
150		AAA3627014	4306	AAA4627025	13388
185		AAA3629016	4384	AAA4629037	13756
240		AAA3633023	4516	AAA4633039	14858
300		AAA3635030	4542	AAA4635061	14910
400		AAA3637027	5270	AAA4637033	15830
500		AAA3639019	5776	-	-
630		AAA3641029	6484	-	-
800		AAA3643012	7534	-	-
1000		AAA3645015	9162	-	-
35	Outdoor Termination	AAA5617005	4594	AAA6617011	14518
50		AAA5619005	4620	AAA6619016	14542
70		AAA5621006	4648	AAA6621020	14858
95		AAA5623008	5146	AAA6623028	14962
120		AAA5625008	5722	AAA6625026	16432
150		AAA5627006	5776	AAA6627021	18480
185		AAA5629004	5854	AAA6629034	18796
240		AAA5633008	6012	AAA6633028	19950
300		AAA5635008	6064	AAA6635042	20002
400		AAA5637007	6470	AAA6637025	20056
500		AAA5639009	7430	-	-
630		AAA5641009	8138	-	-
800		AAA5643005	9268	-	-
1000		AAA5645012	10920	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 33kV Termination Kit - Model EPKT-S & EPKT-C



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular
- Indoor & Outdoor both versions come with rain skirts

Model		EPKT-S				EPKT-C			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (Sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3717006	5876	AAA4717009	18776	AAA3717007	4850	AAA4717010	15450
50		AAA3719012	5926	AAA4719017	20450	AAA3719013	4976	AAA4719018	15976
70		AAA3721010	6226	AAA4721013	20726	AAA3721011	5276	AAA4721014	16788
95		AAA3723022	6300	AAA4723024	20900	AAA3723023	5500	AAA4723025	18442
120		AAA3725015	6350	AAA4725023	21526	AAA3725016	5526	AAA4725024	19500
150		AAA3727015	6400	AAA4727020	21800	AAA3727016	5600	AAA4727021	19576
185		AAA3729026	6500	AAA4729031	22100	AAA3729027	5650	AAA4729032	20026
240		AAA3733029	7226	AAA4733036	23100	AAA3733030	5826	AAA4733037	20076
300		AAA3735041	7594	AAA4735065	26276	AAA3735042	6450	AAA4735066	23500
400		AAA3737035	8650	AAA4737105	28372	AAA3737036	6876	AAA4737106	24700
500		AAA3739031	9176	-	-	AAA3739032	8076	-	-
630		AAA3741048	11076	-	-	AAA3741049	9976	-	-
800		AAA3743015	11400	-	-	AAA3743016	10250	-	-
1000		AAA3745020	13226	-	-	AAA3745021	11700	-	-
35	Outdoor Termination	AAA5717005	8526	AAA6717015	28350	AAA5717006	6300	AAA6717016	20376
50		AAA5719012	8600	AAA6719011	30326	AAA5719013	6450	AAA6719012	20900
70		AAA5721008	8776	AAA6721013	30376	AAA5721009	6750	AAA6721014	23000
95		AAA5723014	8826	AAA6723022	30650	AAA5723015	7226	AAA6723023	24600
120		AAA5725018	8900	AAA6725017	31826	AAA5725019	7276	AAA6725018	24900
150		AAA5727013	8950	AAA6727017	31876	AAA5727014	7326	AAA6727018	25050
185		AAA5729023	9000	AAA6729029	32150	AAA5729024	7350	AAA6729030	25126
240		AAA5733019	9676	AAA6733032	32400	AAA5833012	7376	AAA6733033	25350
300		AAA5735025	11700	AAA6735055	38450	AAA5735026	8250	AAA6735056	28762
400		AAA5737025	12076	AAA6737120	40776	AAA5737026	9250	AAA6737121	31226
500		AAA5739022	12576	-	-	AAA5739023	10050	-	-
630		AAA5741029	14500	-	-	AAA5741030	11950	-	-
800		AAA5743010	14650	-	-	AAA5743011	12226	-	-
1000		AAA5745021	16400	-	-	AAA5745022	13326	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 33kV Termination Kit - Model EPKT-C-CU



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Cu Crimp
- Sleeve type: Tubular

Model		EPKT-C-CU			
Cable Size (Sq. mm)	Termination Type	For 1 Core Cable		For 3 Core Cable	
		PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3718001	4850	AAA4718003	15676
50		AAA3720004	5076	AAA4720006	16376
70		AAA3722004	5426	AAA4722008	18826
95		AAA3724008	5876	AAA4724019	20076
120		AAA3726012	6176	AAA4726008	21650
150		AAA3728006	6650	AAA4728004	22476
185		AAA3730015	6700	AAA4730012	22950
240		AAA3734030	8150	AAA4734014	26676
300		AAA3736015	8726	AAA4736020	30700
400		AAA3738027	10200	AAA4738015	35076
500		AAA3740014	12000	-	-
630		AAA3742021	15600	-	-
800		AAA3744006	19100	-	-
1000		AAA3746009	26976	-	-
35	Outdoor Termination	AAA5718002	6,326	AAA6718004	20676
50		AAA5720005	6,550	AAA6720007	21376
70		AAA5722004	6,900	AAA6722010	24000
95		AAA5724005	7,700	AAA6724014	26226
120		AAA5726011	7976	AAA6726004	28026
150		AAA5728003	8226	AAA6728004	28976
185		AAA5730011	8276	AAA6730008	30776
240		AAA5734023	9700	AAA6733038	32100
300		AAA5736012	10700	AAA6736011	37850
400		AAA5738015	12226	AAA6738013	42200
500		AAA5720006	14126	-	-
630		AAA5742017	17376	-	-
800		AAA5744007	21226	-	-
1000		AAA5746007	27200	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 33kV Termination Kit - Model HVT-M



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular
- Indoor & Outdoor both versions come with rain skirts

Model		HVT-M			
		For 1 Core Cable		For 3 Core Cable	
Cable Size (Sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3717008	4620	AAA4717011	14122
50		AAA3719014	4858	AAA4719019	14674
70		AAA3721012	5068	AAA4721015	15934
95		AAA3723024	5120	AAA4723026	17038
120		AAA3725017	5172	AAA4725025	17142
150		AAA3727017	5224	AAA4727022	17220
185		AAA3729028	5302	AAA4729033	17482
240		AAA3733031	5618	AAA4733038	17746
300		AAA3735043	6300	AAA4735067	16812
400		AAA3737037	6538	AAA4737107	20712
500		AAA3739033	8138	-	-
630		AAA3741050	5728	-	-
800		AAA3743018	9268	-	-
1000		AAA3745022	11472	-	-
35	Outdoor Termination	AAA5717007	6484	AAA6717017	18664
50		AAA5719014	6668	AAA6719013	19216
70		AAA5721010	6904	AAA6721015	20790
95		AAA5723016	6470	AAA6723024	21836
120		AAA5725020	6716	AAA6725019	21980
150		AAA5727015	6906	AAA6727019	22100
185		AAA5729025	6966	AAA6729031	22200
240		AAA5733020	7082	AAA6733034	22602
300		AAA5735027	8430	AAA6735057	23400
400		AAA5737027	8742	AAA6737122	26566
500		AAA5739024	10370	-	-
630		AAA5741031	10074	-	-
800		AAA5743012	11524	-	-
1000		AAA5745023	13702	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 33kV(UE) Termination Kit - Model EPKT-UE



- Conforms to - Generally as per IS 13573-2 with BIL 170 kVp
- Suitable for voltage upto 33 kV, cable range of 70 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular

Model		EPKT-UE			
Cable Size (Sq. mm)	Termination Type	For 1 Core Cable		For 3 Core Cable	
		PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
70	Indoor Termination	AAA3721015	7400	AAA4721022	23650
95		AAA3723029	7450	AAA4723037	23876
120		AAA3725021	7976	AAA4725029	26350
150		AAA3727019	9050	AAA4727025	30000
185		AAA3729033	9126	AAA4729040	30250
240		AAA3733044	10400	AAA4733044	31126
300		AAA3735060	10500	AAA4735082	32176
400		AAA3737054	10776	AAA4737124	33176
500		AAA3739044	12550	-	-
630		AAA3741070	14700	-	-
800		AAA3743022	15600	-	-
1000		AAA3745026	16250	-	-
70	Outdoor Termination	AAA5721011	9050	AAA6721016	28350
95		AAA5723017	9100	AAA6723027	28576
120		AAA5725023	9626	AAA6725021	31026
150		AAA5727016	11250	AAA6727023	36376
185		AAA5729030	11350	AAA5729029	36650
240		AAA5733023	12826	AAA6733039	37500
300		AAA5735032	12950	AAA6735060	38550
400		AAA5737032	13150	AAA6737128	39550
500		AAA5739025	16126	-	-
630		AAA5741038	18276	-	-
800		AAA5743014	18650	-	-
1000		AAA5745027	19826	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

11kV Straight Through Joint Kit - Model EPKJ-S, EPKJ-C & EPKJ-C-CU



- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp for EPKJ-S & EPKJ-C and CU Crimp for EPKJ-C-CU
- Sleeve type: Tubular

Model		EPKJ-S				EPKJ-C			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (Sq. mm)	Joint Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Straight Through Joint	AAA1417011	11426	AAA2417031	27992	AAA1417010	10200	AAA2417030	26626
50		AAA1419013	11500	AAA2419032	29850	AAA1419012	10550	AAA2419031	27476
70		AAA1421017	12750	AAA2421047	29900	AAA1421016	11300	AAA2421046	29226
95		AAA1423028	13626	AAA2423058	29976	AAA2423057	12126	AAA2423056	29276
120		AAA1426002	13676	AAA2425064	36426	AAA1425019	12176	AAA2425063	29326
150		AAA1427026	14376	AAA2427069	36726	AAA1427025	12226	AAA2427068	30076
185		AAA1429018	15826	AAA2429087	37300	AAA1429017	13150	AAA2429086	38750
240		AAA1433019	16750	AAA2433107	40476	AAA1433018	14150	AAA2433106	38800
300		AAA1435021	17676	AAA2435134	41050	AAA1435020	14250	AAA2435133	39026
400		AAA1437021	19576	AAA2437076	41626	AAA1437020	17376	AAA2437075	40776
500		AAA1439013	21352	-	-	AAA1439012	19676	-	-
630		AAA1441026	24826	-	-	AAA1441025	21700	-	-
800		AAA2443001	27476	-	-	AAA1443011	23250	-	-
1000		AAA1445027	31790	-	-	AAA1445026	28176	-	-

Note: Connector Type - Al Crimp

Model		EPKJ-C-CU			
		For 1 Core Cable		For 3 Core Cable	
Cable Size (Sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
70	Straight Through Joint	AAA1418001	10126	AAA2418011	25900
95		AAA1420001	10300	AAA2420013	26876
120		AAA1422002	11050	AAA2422007	28826
150		AAA1424002	11950	AAA2424017	29400
185		AAA1426003	12150	AAA2426006	29876
240		AAA1428008	12426	AAA2428012	33416
300		AAA1430003	13750	AAA2430024	38300
400		AAA1434009	15076	AAA2434015	39400
500		AAA1436006	15600	AAA2435153	43300
630		AAA1438005	20326	AAA2438005	48650
800		AAA1440005	23200	-	-
1000		AAA1442009	27576	-	-
800		AAA1444003	30676	-	-
1000		AAA1446002	46176	-	-

Note: Connector Type - Cu Crimp

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

11kV Straight Through Joint Kit - Model HVS-X-M & HSJ

- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Wraparound

Model	Cable Size (Sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
HVS-X-M	35	Straight Through Joint	AAA1417012	7588	AAA2417032	18244
	50		AAA1419014	7640	AAA2419033	18298
	70		AAA1421018	7692	AAA2421048	19050
	95		AAA1423029	7744	AAA2423060	19162
	120		AAA1425020	7822	AAA2425065	20590
	150		AAA1427027	7876	AAA2427070	21840
	185		AAA1429020	7980	AAA2429088	22200
	240		AAA1433020	10422	AAA2433108	22400
	300		AAA1435022	10474	AAA2435136	25744
	400		AAA1437022	10710	AAA2437077	29768
	500		AAA1439014	15514	-	-
	630		AAA1441028	17220	-	-
	800		AAA1443012	21946	-	-
	1000		AAA1445028	22824	-	-

Model	Cable Size (Sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
HSJ	35	Straight Through Joint	AAA1417013	4456	AAA2417036	12486
	50		AAA1419015	5060	AAA2419038	14475
	70		AAA1421019	5198	AAA2421052	14634
	95		AAA1423030	5226	AAA2423066	14952
	120		AAA1425021	5638	AAA2425070	16446
	150		AAA1427030	5830	AAA2427077	16610
	185		AAA1429021	6546	AAA2429093	16872
	240		AAA1433021	7096	AAA2433120	20302
	300		AAA1435025	7368	AAA2435146	20708
	400		AAA2437084	7564	AAA2437086	21386
	500		AAA1439017	7618	-	-
	630		AAA1441032	7700	-	-
	800		AAA1443014	10396	-	-
	1000		AAA1445029	11138	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

Straight Through Joint Kit - Model MXSW



- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Built-in Al Mechanical connector
- Sleeve type: Rayfit Tubular

Model	Cable Size (Sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
MXSW	25-95	Straight Through Joint	AAA1419006	13834	AAA2400023	33260
	120-240		AAA1434004	17482	AAA2400024	53314
	300-400		AAA1438002	21238	AAA2400025	64890
	500		AAA1440003	30450	-	-
	630		AAA1441016	32182	-	-
	800		AAA1444001	43760	-	-
	1000		AAA1446001	43812	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

22kV Straight Through Joint Kit - Model EPKJ-S, EPKJ-C & EPKJ-C-CU



- Conforms to IS 13573-2
- Suitable for voltage upto 22 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp for EPKJ-S, EPKJ-C and Cu Crimp for EPKJ-C-CU
- Sleeve type: Tubular

Model		EPKJ-S				EPKJ-C			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (Sq. mm)	Joint Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Straight Through Joint	-	-	AAA2617008	40776	-	-	AAA2617009	39900
50		AAA1619006	15650	AAA2619008	41350	AAA1619007	14300	AAA2619009	40176
70		AAA1621009	18726	AAA2621013	54326	AAA1621010	15350	AAA2621014	48550
95		AAA1623008	19876	AAA2623022	54926	AAA1623009	16276	AAA2623023	49150
120		AAA1625007	19926	AAA2625020	56650	AAA1625008	17776	AAA2625021	55776
150		AAA1627008	19976	AAA2627018	56926	AAA1627009	17850	AAA2627019	57218
185		AAA1629010	21800	AAA2629023	57226	AAA1629011	17900	AAA2629024	60100
240		AAA1633010	21950	AAA2633035	63576	AAA1633011	18000	AAA2633036	60700
300		AAA1635011	24550	AAA2635038	66476	AAA1635012	19050	AAA2635039	61276
400		AAA1637014	26950	AAA2637025	67550	AAA1637015	22116	AAA2637026	65876
500		AAA1639014	30650	-	-	AAA1639015	27776	-	-
630		AAA1641016	37600	-	-	AAA1641017	30950	-	-
800		AAA1643005	42200	-	-	AAA1643006	37876	-	-
1000		AAA1645010	56076	-	-	AAA1645011	51726	-	-

Note: Connector Type - Al Crimp

Model		EPKJ-C-CU			
		For 1 Core Cable		For 3 Core Cable	
Cable Size (Sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Straight Through Joint	-	-	AAA2618001	39126
50		AAA1620002	13926	AAA2620002	39300
70		AAA1622002	14976	AAA2622003	47300
95		AAA1624003	15926	AAA2624002	48226
120		AAA1626004	18176	AAA2626002	56250
150		AAA1628001	18326	AAA2628003	56776
185		AAA1630001	18576	AAA2630007	58046
240		AAA1634002	19076	AAA2634004	61380
300		AAA1636004	20500	AAA2636005	62502
400		AAA1638005	26100	AAA2638001	75726
500		AAA1640004	31700	-	-
630		AAA1642005	37176	-	-
800		AAA1644002	44576	-	-
1000		AAA1646005	68250	-	-

Note: Connector Type - Cu Crimp

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

22kV Straight Through Joint Kit - Model HVCJ-M



- Conforms to IS 13573-2
- Suitable for voltage upto 22 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Wraparound

Model	Cable Size (Sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
HCVJ-M	35	Straight Through Joint	-	-	AAA2617010	29452
	50		AAA1619008	11078	AAA2619010	29872
	70		AAA1621011	11392	AAA2621015	30320
	95		AAA1623010	11524	AAA2623024	30688
	120		AAA1625009	16828	AAA2625022	41292
	150		AAA1627010	16932	AAA2627020	41580
	185		AAA1629012	16984	AAA2629025	41896
	240		AAA1633012	17824	AAA2633037	42500
	300		AAA1635013	17878	AAA2635040	42814
	400		AAA1637016	19400	AAA2637027	50690
	500		AAA1639016	20266	-	-
	630		AAA1641018	20554	-	-
	800		AAA1643007	25410	-	-
	1000		AAA1645012	38850	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

22kV Straight Through Joint Kit - Model MXSW



- Conforms to IS 13573-2
- Suitable for voltage upto 22 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Built-in Al Mechanical connector
- Sleeve type : Rayfit Tubular

Model	Cable Size (Sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
MXSW	25-95	Straight Through Joint	AAA1624001	20134	AAA2600012	53602
	120-240		AAA1600012	20422	AAA2600013	60244
	300-400		AAA1600013	30162	AAA2600014	77044
	500		AAA1640001	36830	-	-
	630		AAA1642003	39980	-	-
	800		AAA1644001	57934	-	-
	1000		AAA1646004	58250	-	-

33kV Straight Through Joint Kit - Model EPKJ-S & EPKJ-C



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type : Tubular

Model		EPKJ-S				EPKJ-C			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (Sq. mm)	Joint Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Straight through Joint	AAA1717004	22526	AAA2717006	58676	AAA1717005	16850	AAA2170001	49150
50		AAA1719008	22576	AAA2719010	58950	AAA1719009	19350	AAA2719011	57500
70		AAA1721008	22626	AAA2721013	66660	AAA1721009	19400	AAA2721014	57800
95		AAA1723012	26276	AAA2723012	68200	AAA1723013	23626	AAA2723013	66476
120		AAA1725009	26300	AAA2725015	68726	AAA1725010	24076	AAA2725016	67626
150		AAA1727011	26326	AAA2727020	69100	AAA1727012	24126	AAA2727021	57064
185		AAA1729017	34126	AAA2729028	72100	AAA1729018	29500	AAA2729029	73976
240		AAA1733022	34400	AAA2733042	73400	AAA1733023	28900	AAA2733043	74550
300		AAA1735025	34650	AAA2735075	77200	AAA1735026	30650	AAA2735076	75126
400		AAA1737030	35000	AAA2737085	77676	AAA1737031	30950	AAA2737086	75256
500		AAA1739012	62426	-	-	AAA1739013	52900	-	-
630		AAA1741029	62852	-	-	AAA1741030	53176	-	-
800		AAA1743007	63576	-	-	AAA1743008	53750	-	-
1000		AAA1745016	64150	-	-	AAA1745017	54626	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

33kV Straight Through Joint Kit - Model EPKJ-C-CU



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Cu Crimp
- Sleeve type: Tubular

Model	EPKJ-C-CU				
Cable Size (Sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
		PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Straight Through Joint	AAA1718001	16476	AAA2718001	48200
50		AAA1720002	18926	AAA2720001	55626
70		AAA1722001	19026	AAA2722003	56126
95		AAA1724006	23126	AAA2724007	64926
120		AAA1726002	23750	AAA2726002	66826
150		AAA1728007	23900	AAA2728006	67350
185		AAA1730011	29350	AAA2730005	74450
240		AAA1734027	30050	AAA2734009	76350
300		AAA1736010	31676	AAA2736013	78450
400		AAA1738022	33550	AAA2738010	86350
500		AAA1740015	54518	-	-
630		AAA1742010	58326	-	-
800		AAA1744005	60626	-	-
1000		AAA1746004	71876	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

33kV Straight Through Joint Kit - Model HVCJ-M



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Wraparound

Model	Cable Size (Sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
HCVJ-M	35	Straight Through Joint	AAA1717006	15094	AAA2717007	34912
	50		AAA1719010	18560	AAA2719012	47040
	70		AAA1721010	18612	AAA2721015	39170
	95		AAA1723014	19162	AAA2723014	50032
	120		AAA1725011	20030	AAA2725017	58222
	150		AAA1727013	20608	AAA2727022	58564
	185		AAA1729019	20738	AAA2729030	58828
	240		AAA1733024	21788	AAA2733044	59400
	300		AAA1735027	23048	AAA2735077	63200
	400		AAA1737032	23882	AAA2737087	66652
	500		AAA1739014	40084	-	-
	630		AAA1741031	30926	-	-
	800		AAA1743009	45230	-	-
	1000		AAA1745018	45544	-	-

33kV Straight Through Joint Kit - Model MXSW



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Built-in Al Mechanical connector
- Sleeve type: Rayfit Tubular

Model	Cable Size (Sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
MXSW	35-95	Straight Through Joint	AAA1700012	26566	AAA2700019	81664
	120-240		AAA1700013	35360	AAA2700020	101352
	300-400		AAA1700014	38248	AAA2700021	107128
	500		AAA1740007	58512	-	-
	630		AAA1741015	59668	-	-
	800		AAA1744001	64890	-	-
	1000		AAA1746001	65468	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

33kV(UE) Straight Through Joint Kit - Model EPKJ-UE



- Conforms to – Generally as per IS 13573-2 with BIL 170 kVp
- Suitable for voltage upto 33 kV, cable range of 70 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular

Model	Cable Size (Sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
EPKJ-UE	70	Straight Through Joint	AAA1721012	24600	AAA2721016	67550
	95		AAA1723015	29376	AAA2723019	71476
	120		AAA1725015	29900	AAA2725018	73576
	150		AAA1727015	30250	AAA2727023	74626
	185		AAA1729020	35256	AAA2729033	90950
	240		AAA1733025	35450	AAA2733047	91176
	300		AAA1735030	47526	AAA2735083	125434
	400		AAA1737037	48700	AAA2737098	129676
	500		AAA1739019	76600	-	-
	630		AAA1741036	76974	-	-
	800		AAA1743010	106126	-	-
	1000		AAA1745021	111376	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Switchgear Plug-in Termination Kit

Switchgear Inner Cone Termination - Model RPIT



- Conforms to size 2 & 3 bushing as per EN50180 / EN 50181
- Plug-in single core termination for Inner cone bushing
- Separable inline connection for high current, gas insulated switchgears up to 42 kV

Model	System Voltage (kV)	Size of Bushing	Current (Amp)	Insulation Diameter Range (in mm)	For 1/3 Core Cable	
					PCN	List Price (INR) Per Unit
RPIT	up to 36kV	Size-2	800	19.5 - 42	Available on request	Available on request
	up to 42kV	Size-3	1250	26-50		
Trifurcation Kit	up to 42kV	Size - 2/3	-	-		

Note: Cable data sheet mandatory for right product selection.

MEDIUM VOLTAGE CABLE ACCESSORIES

Switchgear Plug-in Termination Kit

Switchgear Outer Cone Termination - Model ELBC



- Conforms to type C bushing as per EN50180 / EN 50181
- Suitable for voltage upto 33kV & current upto 1250 Amps, wide cable range of 35 - 800 Sq. mm.
- Screened, Separable elbow connector for Type C bushing
- Built-in Trifurcation Kit for three core version
- Connector Type - Al Mechanical
- Removable rear plug with capacitive test point
- Earthing Eye and Ground lead provides a connection point for earthing the screen

Model	System Voltage (kV)	Connector Type	Cable Size (Sq.mm)	Max Current (Amp)	Cable Insulation Diameter Range (in mm)	For 1 Core Cable		For 3 Core Cable	
						PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
ELBC	11kV	Front Connectors For Type C Bushing	35-50	800A	13.5-18.0	AAA4119018	68350	AAA4119019	68900
			70-95		17.0-22.0	AAA4119021	70708	AAA4423085	72446
			120		17.0-22.0	AAA4125018	78276	AAA4425088	78826
			150-185		21.5-27.0	AAA3429022	78276	AAA4429136	78826
			240-300		26.0-30.0	AAA4135027	78276	AAA4435160	78826
			400		30.0-37.5	AAA3437026	78276	AAA0437011	78826
		Rear (Coupling) Connectors for Type Cbushing	35-50	800A	13.5-18.0	AAA4837002	64500	AAA4119020	66150
			70-95		17.0-22.0	AAA4123016	73326	AAA4423087	74426
			120		17.0-22.0	AAA4125020	73326	AAA4425090	74426
			150-185		21.5-27.0	AAA4129023	73326	AAA4129024	74426
			240-300		26.0-30.0	AAA4135028	73326	AAA4435163	74426
			400		30.0-37.5	AAA3437027	73326	AAA0437012	74426
	22kV	Front Connectors for Type C Bushing	35-50	800A	17.0-22.0	AAA4619013	76076	AAA4619014	76626
			70-95		21.5-27.0	AAA3623018	76076	AAA4623041	76626
			120		23.5-27.0	AAA3625016	76076	AAA4625036	76626
			150-185		26.0-30.0	AAA4129020	76076	AAA4629030	76626
			240-300		30.0-37.5	AAA4635062	76076	AAA4635064	76626
			400	1250A	33.0-38.0	AAA3637029	97026	AAA4637034	99226
		Rear (Coupling) Connectors for Type C Bushing	500		37.0-42.0	AAA4139008	97026	AAA4139009	99226
			630		41.0-47.0	AAA4139012	97026	AAA4139013	99226
			800		47.0-52.0	AAA4143002	138376	-	-
			35-50	800A	17.0-22.0	AAA4619015	71676	AAA4619016	72226
			70-95		21.5-27.0	AAA4623030	71676	AAA4623044	72226
			120		23.5-27.0	AAA4625028	71676	AAA4625029	72226
			150-185		26.0-30.0	AAA4629032	71676	AAA4629033	72226
			240-300		30.0-37.5	AAA4635051	71676	AAA4635067	72226
			400	1250A	33.0-38.0	AAA3637030	86000	AAA4137023	87650
			500		37.0-42.0	AAA4139010	86000	AAA4139011	87650
			630		41.0-47.0	AAA4139014	86000	AAA4139015	87650
			800		47.0-52.0	AAA4143003	126226	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Switchgear Plug-in Termination Kit

Switchgear Outer Cone Termination - Model ELBC



- Conforms to type C bushing as per EN50180 / EN 50181
- Suitable for voltage upto 33kV & current upto 1250 Amps, wide cable range of 35 - 800 Sq. mm.
- Screened, Separable elbow connector for Type C bushing
- Built-in Trifurcation Kit for three core version
- Connector Type - Al Mechanical
- Removable rear plug with capacitive test point
- Earthing Eye and Ground lead provides a connection point for earthing the screen

Model	System Voltage (kV)	Connector Type	Cable Size (Sq.mm)	Max Current (Amp)	Cable Insulation Diameter Range (in mm)	For 1 Core Cable		For 3 Core Cable	
						PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
ELBC	33kV	Front Connectors for Type C Bushing	35-70	800A	24.5-29.0	AAA1048441	82700	AAA1048446	85450
			95-150		29.0-34.0	AAA1048435	82700	AAA1048443	85450
			150-240		33.0-38.0	AAA1048442	82700	AAA4729035	85450
			240-300		37.0-41.0	AAA1048436	82700	AAA1048456	85450
			400	1250A	41.0-47.0	AAA3737040	105850	AAA4137025	108600
			500		41.0-47.0	AAA3739035	105850	AAA4139017	108600
			630		47.0-52.0	AAA3741053	105850	AAA4141010	108600
			800		52.0-59.0	AAA4143004	146076	-	-
		Rear (Coupling) Connectors for Type C Bushing	35-70	800A	24.5-29.0	AAA4719012	67250	AAA1048450	70000
			95-150		29.0-34.0	AAA4725018	75526	AAA1048454	78826
			150-240		33.0-38.0	AAA4729024	75526	AAA1048455	78826
			240-300		37.0-41.0	AAA1048449	75526	AAA1048458	78826
			400	1250A	41.0-47.0	AAA3737043	86000	AAA4137027	89300
			500		41.0-47.0	AAA4139018	86000	AAA4139019	89300
			630		47.0-52.0	AAA3741056	86000	AAA4141012	89300
			800		52.0-59.0	AAA3143002	126226	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Switchgear Plug-in Termination Kit

Switchgear Outer Cone Termination - Model RSTI



- Conforms to type C bushing as per EN50180 / EN 50181
- Suitable for type c bushing as per voltage upto 33kV & current upto 1250 Amps, wide cable range of 35 - 800 Sq. mm.
- Screened, Separable elbow connector for Type C bushing
- Built-in Trifurcation Kit for three core version
- Connector Type - Al Mechanical
- Removable rear plug with capacitive test point
- Earthing Eye and Ground lead provides a connection point for earthing the screen

Model	System Voltage (kV)	Connector Type	Cable Size (Sq.mm)	Max Current (Amp)	Cable Insulation Diameter Range (in mm)	For 1 Core Cable		For 3 Core Cable	
						PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
RSTI	11kV	Front Connectors for Type C Bushing	35-95	800A	12.7-25.0	AAA3623007	97626	AAA4621015	99276
			95-120		12.7-25.0	AAA3425008	97626	AAA4425063	100376
			95-240		17-32.6	AAA3633014	97626	AAA4633025	101476
			150-240		21.3-34.6	AAA3633015	97626	AAA4633026	101476
			185-300	1250A	21.3-34.6	AAA3635020	100375	AAA4635036	104226
			400		28.9-36.4	AAA3437014	233776	AAA4437058	236526
			500		28.9-36.4	AAA3439021	234326	AAA4439011	238200
			630		34-45.4	AAA3441030	234326	AAA4441016	238200
			800		34-45.4	AAA3443009	266300	-	-
		Rear (Coupling) Connectors for Type C Bushing	35-95	800A	12.7-25.0	AAA3623008	96526	AAA4623023	98726
			95-120		12.7-25.0	AAA3425009	96526	AAA4425064	99276
			95-240		17-32.6	AAA3633016	96526	AAA4633027	100376
			150-240		21.3-34.6	AAA3633017	96526	AAA4633028	100376
			185-300	1250A	21.3-34.6	AAA3635021	99276	AAA4635037	103676
			400		28.9-36.4	AAA3437015	272926	AAA4437059	275676
			500		28.9-36.4	AAA3439022	273476	AAA4439012	277326
			630		34-45.4	AAA3441031	273476	AAA4441017	277326
			800		34-45.4	AAA3441032	305450	-	-
	22kV	Front Connectors for Type C Bushing	35-70	800A	12.7-25.0	AAA3623007	97626	AAA4621015	99276
			95-185		17-32.6	AAA3633014	97626	AAA4633025	101476
			95-240		21.3-34.6	AAA3633015	97626	AAA4633026	101476
			185-300		21.3-34.6	AAA3635020	100375	AAA4635036	104226
			400	1250A	34.0-45.4	AAA3637016	222200	AAA4637021	226076
			500		34.0-45.4	AAA3639014	222750	AAA4639007	226626
			630		39.1-59.0	AAA3641018	237650	AAA4641003	240950
			800		39.1-59.0	AAA3643007	281200	-	-
		Rear (Coupling) Connectors for Type C Bushing	35-50	800A	12.7-25.0	AAA3623008	96526	AAA4623023	98726
			70-95		17-32.6	AAA3633016	96526	AAA4633027	100376
			120		21.3-34.6	AAA3633017	96526	AAA4633028	100376
			150-185		21.3-34.6	AAA3635021	99276	AAA4635037	103676
			400	1250A	34.0-45.4	AAA3637017	261350	AAA4637022	265200
			500		34.0-45.4	AAA3639015	261900	AAA4639008	265750
			630		39.1-59.0	AAA3641019	276776	AAA4641004	280076
			800		39.1-59.0	AAA3643008	320326	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Switchgear Plug-in Termination Kit

Switchgear Outer Cone Termination - Model RSTI



- Conforms to type C bushing as per EN50180 / EN 50181
- Suitable for type c bushing as per voltage upto 33kV & current upto 1250 Amps, wide cable range of 35 - 800 Sq. mm.
- Screened, Separable elbow connector for Type C bushing
- Built-in Trifurcation Kit for three core version
- Connector Type - Al Mechanical
- Removable rear plug with capacitive test point
- Earthing Eye and Ground lead provides a connection point for earthing the screen

Model	System Voltage (kV)	Connector Type	Cable Size (Sq.mm)	Max Current (Amp)	Cable Insulation Diameter Range (in mm)	For 1 Core Cable		For 3 Core Cable	
						PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
RSTI	33kV	Front Connectors for Type C Bushing	35-95	800A	22.4-35.5	AAA3723010	140626	AAA4723016	143926
			95-150		22.4-35.5	AAA3727008	140626	AAA4727016	143926
			120-240		28.9-42.0	AAA3733012	140626	AAA4733021	143926
			185-300		28.9-42.0	AAA3735019	140626	AAA4735038	143926
			400	1250A	34.0-45.4	AAA3737013	222300	AAA4737079	190860
			500-630		39.1-59.0	AAA3741027	225882	AAA4741001	244250
			800		39.1-59.0	AAA3743008	281200	-	-
			800		39.1-59.0	AAA3743009	320326	-	-
		Rear (Coupling) Connectors for Type C Bushing	35-95	800A	22.4-35.5	AAA3723011	150550	AAA4723017	153850
			95-150		22.4-35.5	AAA3727009	150550	AAA4727017	153850
			120-240		28.9-42.0	AAA3733013	150550	AAA4733022	153850
			185-300		28.9-42.0	AAA3735020	150550	AAA4735039	153850
			400	1250A	34.0-45.4	AAA3737014	261900	AAA4737080	268500
			500-630		39.1-59.0	AAA3741028	276776	AAA4741002	283400
			800		39.1-59.0	AAA3743009	320326	-	-
			800		39.1-59.0	AAA3743009	320326	-	-



TECHNOLOGY YOU CAN RELY ON FOR CRITICAL CONNECTION

EXTRA HIGH VOLTAGE OHVT TERMINATION & EHVS JOINT - UP TO 245KV



OHVT

Outdoor High Voltage Termination

EHVS

Energy High Voltage Splice

Power supply is one of the key elements for the energy industry and cable connection is the backbone of it.

Raychem RPG's EHVS Joint & OHVT Termination are highly engineered connections that brings reliability to your EHV network.

It shows the difference that it can make. You get a greater level of reliability and the assurance that critical connection is guaranteed each time, every time.

Both OHVT & EHVS Kit Conforms to IEC 60840 and IEC 62067 Standards. Polymeric insulated cables of various designs can be adopted with respect to shielding and metal sheath.

Reap the benefits of the advanced technology today


Why wait? Contact us now.

Follow us on:     

HIGH VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 52/72kV Termination Kit - Model IHVT/OHVT

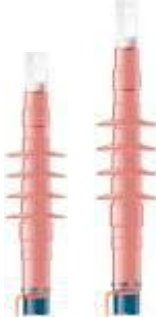

- Conforms to - IEC 60840
- Suitable for voltage upto 66 kV, Approx cable range of 95 - 1600 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Crimp (Mech Conn - Optional)
- Sleeve type : Tubular

Model	Cable size	Cable size (dia over XLPE in mm)	Cable size (dia oversheath in mm)	Termination Type	For 1 Core Cable	
					PCN	List Price (INR) Per Unit
IHVT	Size1	30-45 mm	<=60 mm	Indoor	Available on Request	117678
OHVT	Size 1	30-45 mm	<=60 mm	Outdoor		121282
IHVT	Size 2	38-55 mm	<=70 mm	Indoor		121282
OHVT	Size 2	38-55 mm	<=70 mm	Outdoor		125146
IHVT	Size 3	48-65 mm	<=80 mm	Indoor		125146
OHVT	Size 3	48-65 mm	<=80 mm	Outdoor		134672
IHVT	Size 4	58-77 mm	<=100 mm	Indoor		134672
OHVT	Size 4	58-77 mm	<=100 mm	Outdoor		188490
IHVT	Size 5	70-86 mm	<=110 mm	Indoor		On Request
OHVT	Size 5	70-86 mm	<=110 mm	Outdoor		On Request

52/72kV Straight Through Joint Kit - Model EHVS



- Conforms to - IEC 60840
- Suitable for voltage upto 66 kV, Approx cable range of 95 - 1600 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Crimp / Mech Connector
- Sleeve type : Tubular

Model	Cable size	Cable size (dia over XLPE in mm)	Cable size (dia oversheath in mm)	Cable Size (dia oversheath in mm)	Joint Type	For 1 Core Cable	
						PCN	List Price (INR) Per Unit
EHVS	Size 1	130 mm	30-45 mm	<=50 mm	Inline/Sheild break	Available on Request	163978
	Size 2	130 mm	42-55 mm	<=70 mm			173072
	Size 3	130 mm	52-65 mm	<=80 mm			186180
	Size 3	180 mm	52-65 mm	<=80 mm			214000
	Size 4	180 mm	62-77 mm	<=90 mm			237272
	Size 5	180 mm	70-100 mm	<=115 mm			On Request

EXTRA HIGH VOLTAGE CABLE ACCESSORIES

Termination Kit

Outdoor 72/145/245 Oil filled Termination Kit - Model OHVT-C



- Conforms to - IEC 60840 / 62067
- Suitable for voltage upto 72/145/245 kV, Approx cable range of 185 - 2500 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Mechanical Connector
- Oil - Silicon / PIB
- Insulator - Composite type

Indoor 72/145/245 Dry Type plug in Termination Kit - Model PHVS/PHVT



- Conforms to - IEC 60840 / 62067. GIS - IEC 62271-209, En50299
- Suitable for voltage upto 72/145/245 kV, Approx cable range of 185 - 2500 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Wedge Conical Connector
- Switchgear termination - PHVS - Socket + Plug in Termination
- Transformer termination - PHVT - Socket + Plug in Termination + Corona ring
- IEC Adaptor (Extension rod) - Optional

Model	Cable kV	Oil	For 1 Core Cable	
			PCN	List Price (INR) Per Unit
OHVT-C	72	Silicon	Available on Request	636460
	145			848320
	245 (S)			2024348
	245 (B)			2460413
	72	PIB		619905
	145			722975
	245 (S)			1617945
	245 (B)			1756598

Model	Cable kV	Type	For 1 Core Cable	
			PCN	List Price (INR) Per Unit
PHVS	72	PHVS	Available on Request	496925
	145 S (< 72 mm)			632969
	145 B (> 72 mm)			885555
	245			1214624
PHVT	72	PHVT	Available on Request	519750
	145 S (< 72 mm)			678649
	145 B (> 72 mm)			933955
	245			1258228

* IEC Adaptor to be ordered separately

Outdoor 145 Dry Self- Supporting Termination Kit - Model OHVT-DS



- Dry Interface – No gel or liquid
- Self-supporting design
- Extended shelf life
- Top bolt with mechanical connector
- Type tested as per latest IEC 60840
- Isolated base plate for sectionalization

Model	Cable kV	Type	For 1 Core Cable	
			PCN	List Price (INR) Per Unit
OHVT-DS	145	Dry Self-Supporting	Available on Request	1350000

EXTRA HIGH VOLTAGE CABLE ACCESSORIES

Cold Applied Joint Kit

72/145/245 Straight Through Joint Kit - Model EHVS



- Conforms to - IEC 60840 / 62067
- Suitable for voltage upto 72/145/245 kV, Approx cable range of 185 - 2500 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Mechanical Connector
- Outer sealing - Heat Shrink Sleeve, (Cu Casing and FRP coffin box are optional)

Model	Cable size	Cable size (dia over XLPE in mm)	For 1 Core Cable	
			PCN	List Price (INR) Per Unit
EHVS	72	Inline / Shield break, Heat shrink encapsulation	Available on Request	489500
	145			587400
	245			996713

SOLARLOK PV4-S1 CONNECTORS



Features :

- Provides waterproof protection and is rated for IP68 (1 m / 24 hours) protection.
- Minimizes power loss by providing low contact resistance
- One pole connector for 1500V DC.
- Durable and UV-Resistant Housing.
- Easy and secure cable connections.

Cable Size (sqmm)	PCN	List Price (INR) Per Unit	MOQ	Packing Tyoe
4-6	EPASOA1008	85	1000	Strip
4-6	EPASOA1009	85	1000	Strip
4-6	EPASOA1010	85	1000	Loose
4-6	EPASOA1011	85	1000	Loose

CABLE MANAGEMENT SOLUTIONS



CONNECTOR & FITTINGS FOR MVCC

Anchor Clamp



- Conforms to EN 50397-2 Standards
- Built-in Insulation Piercing mechanism
- Clamp body made of corrosion resistant aluminium alloy, bail of stainless steel, wedges of weather and UV resistant polymer

Model	Cable Range in sq.mm	PCN	Unit Rate (INR)
Anchor Clamp (Wedge type)	50-99	AJA4040662	2392
	95 - 157	AJA3020250	2664

Suspension Clamp



- Conforms to EN 50397-2 Standards
- Built-in Insulation Piercing mechanism
- Roller provided for easy installation of covered conductor
- No need for additional pulley during installation

Model	Cable Range in sq.mm	PCN	Unit Rate (INR)
Suspension Clamp	50 - 157	AJA3020251	6770

WATERPROOF INSULATION PIERCING CONNECTORS (IPC)



- Conforms to EN 50483-2 Standards
- Long neck 13 mm shear head nut ensuring reliable installations
- Components are not losable, end cap attached to body
- Insulation material made of weather and UV resistant glass fiber reinforced polymer
- Contact plates made of copper, bolt made of steel with Geomet (Chromium free) protection

Model	Connection Type	Blade Material	Main Conductor Size (Sq. mm.)	Top Conductor Size (Sq. mm.)	PCN	Unit Rate
IPC	Bare Conductor to Covered Conductor	Tin PlatedCopper	50 - 99	50 - 99	AJA4040620	1162
	Covered Conductor to Covered Conductor		50 - 99	50 - 99	AJA4040619	1162
			95 - 240	35 - 95	AJA4040552	1220
			185 - 300	150 - 240	AAA6135023	3348

CONNECTOR & FITTINGS FOR LV ABC

Deep Drawn Box



- Made of CRCA MS Sheet with no welding joint to make base & cover of the box
- Box dimensions: 418 mm x 300 mm x 120 mm.
- 3 Phase Aluminium busbar with Neutral and plastic casing for projection
- Tapered roof design to drain rainwater

Model	Type	PCN	Unit Rate (INR)
Deep Drawn Box	3 Phase + Neutral DB	AAA1048048	3170

Kindly reach our branch office for customized Deep Drawn Box

Anchor Clamp for LV ABC Insulated Messenger



- Conforms to EN 50483-3 and NFC 33 041 Standards
- Tool free installation
- Clamp body made of corrosion resistant aluminium alloy, bail of stainless steel, wedges of weather and UV resistant polymer

Model	Cable Range (in sq.mm)	PCN	Unit Rate (INR)
Anchor Clamp (Wedge type)	25 - 35	AJA4040213	738
	25 - 50	AJA4040326	738
	50 - 70	AJA4040179	738
	70 - 95	AJA4040419	784
	95 - 120	AJA4040550	1468

Anchor Clamp for LV ABC



- Wedge type Conforms to EN 50483-3 and NFC 33 041 Standards
- Bolted type conforms to REC Specification
- Wedge type version offers tool free installation
- Clamp body made of corrosion resistant aluminium alloy, bail of stainless steel, wedges of weather and UV resistant polymer

Model	Cable Range (in sq.mm)	PCN	Unit Rate (INR)
Anchor Clamp (Wedge type)	25 - 50	AJA4040548	1222
	25 - 70	AJA4040208	1122
	70 - 95	AJA4040185	1460
Anchor Clamp (Bolted type)	16 - 50	AJA4040269	290
	16 - 70	AJA4040010	414
	70 - 210	AJA4040009	1142

CONNECTOR & FITTINGS FOR LV ABC

Suspension Clamp for LV ABC Insulated Messenger



- Conforms to EN 50483-3 and NFC 33 040 Standards
- Tool free installation
- Clamp and movable link made of weather and UV-light resistant glass fiber reinforced polymer
- Clamp and link made of polymer giving an additional insulation between the cable and the pole

Model	Cable Range (in sq.mm)	PCN	Unit Rate (INR)
Suspension Clamp (boltless type)	25 - 95	AJA4040117	326

Suspension Clamp for LV ABC Bare Messenger



- Conforms to EN 50483-3 and NFC 33 040 Standards
- Bolted type conforms to REC Specification
- Clamp and movable link made of weather and UV-light resistant glass fiber reinforced polymer
- Clamp and link made of polymer giving an additional insulation between the cable and the pole

Model	Cable Range (in sq.mm)	PCN	Unit Rate (INR)
Suspension Clamp (Boltless type)	25 - 95	AJA4040260	422
Suspension Clamp (Bolted type)	16 - 50	AJA4040268	170
	16 - 70	AJA4040034	392
	70 - 210	AJA4040035	670

CONNECTOR & FITTINGS FOR LV ABC

Service Anchor Clamp



- Conforms to NFC 33042 Standards
- Tool free installation with wedges sliding inside the body
- Clamp made of weather and UV resistant polymer

Model	Cable Range (in sq.mm)	Load (kN)	PCN	Unit Rate (INR)
Suspension Clamp (boltless type)	18 - 25	3	AJA4040220	256
Accessories - Service Clamp SS bracket	-	-	AJA4030004	94

Accessories



Model	Cable Range (in sq.mm)	Strap dimension (Width x Thickness) in mm	Roll Length (meter)	PCN	Unit Rate (INR)
SS Steel Strap	Roll without Casing	20 x 0.7	50	AJA4040025	8356
	Roll with Casing	20 x 0.7	50	AJA4040359	5868
	Buckle for Strap	-	-	AJA4040005	25
Al Bracket for Clamp	Suspension type	-	-	AJA4040593	388
Anchor Clamp (Bolted type)	Anchor type	-	-	AJA4040132	220
Nylon Cable Tie	-	-	03	AJA4040008	22

CONNECTORS & FITTINGS FOR LV ABC

Waterproof Insulation Piercing Connectors (IPC)



- Conforms to NFC 33020 and EN 50483-4 Standards
- Long neck 13 mm shear head nut ensuring reliable installations
- Components are not losable, end cap attached to body
- Insulation material made of weather and UV resistant glass fiber reinforced polymer
- Contact plates made of aluminium or copper, bolt made of steel with Geomet (Chromium free) protection

Model	Blade Material	Main Cable Size (sq mm.)	Tap Cable Size (sq mm.)	PCN	Unit Rate (INR)
IPC	Aluminium	16-95	4-50	AJA4040169	182
		16-95	16-95	AJA4040177	310
		35-150	6-50	AJA4040176	168
		35-150	35-150	AJA4040114	376
	Tin plated Copper	16-95	1.5-10	AJA4040115	154
		16-95	6-25	AJA4040331	108
		16-95	4-50	AJA4040458	356
		16-95	16-95	AJA4040457	902
		35-150	35-150	AJA4040217	902

Waterproof Pre-insulated Hexagonal Compression Connectors - Model MJPT



- Conforms to NFC 33020 and EN 50483-4 Standards
- A colour code of elastomeric sealing ring allows an easy identification of the cross sections
- Inner aluminium sleeve filled with contact grease
- Insulation material made of weather and UV resistant polymer

Model	Cable Range (in sq.mm)	PCN	Unit Rate (INR)	Unit Rate (INR)
MJPT	16	Blue	AJA4030027	192
	25	Orange	AJA4030028	192
	35	Red	AJA4030029	192
	50	Yellow	AJA4030031	192
	70	White	AJA4030034	192
	95	Grey	AJA4030135	234
	120	Pink	AJA4030101	1088

CONNECTORS & FITTINGS FOR LV ABC

Eye Hook



- Galvanized steel bolted and flat type
- Suitable for horizontal and vertical application

Model	Load (KN)	PCN	Unit Rate (INR)
Flat Eye Hook	9	AJA4040013	234
	13	AJA4040254	360
	20	AJA4040014	420
Bolted Eye Hook	12	AJA4040007	490
	18	AJA4040012	504
Pole Clamp (Rectangular)	-	AJA4040023	1160

Waterproof Pre-insulated Hexagonal Compression Bi-metallic Lugs - Model CPTAU



- Conforms to NFC 33021 and EN 50483-4 Standards
- A colour code of elastomeric sealing ring allows an easy identification of the cross sections
- Inner aluminium sleeve filled with contact grease
- Insulation material made of weather and UV resistant polymer

Model	Cable Range (in sq.mm)	PCN	Unit Rate (INR)	Unit Rate (INR)
CPTAU	16	Blue	AJA4030010	804
	25	Orange	AJA4030011	804
	35	Red	AJA4030012	804
	50	Yellow	AJA4030013	804
	70	White	AJA4030014	804
	95	Grey	AJA4030105	804
	120	Pink	AJA4030112	2442

End Caps



- The elastomeric end caps are premoulded and simply pushed over the conductors
- These end caps are made of thermo plastic UV-resistant material

Model	Cable Range (in sq.mm)	Cable Dia. (mm)	PCN	Unit Rate (INR)
End Caps	6 - 150	6.5 - 19.0	AJA4040118	20

Open your world to Raychem RPG's **Ampact** Tap Connectors

Fired Wedge Connector | Universal Distribution Connector | Mini Wedge Connector



**So, you save time, money
& gain a hoist of benefits**

Look at the Benefits you reap when select AMPACT connectors...

AMPACT tap connectors use the action of a metal wedge to secure the two conductors to be connected at opposing ends of the C-clamp.

The wedge is inserted at a very high-speed using the AMPACT connector tool.

High-speed insertion is very effective in abrading all sliding surfaces and in disrupting surface oxide film to generate large numbers of contact spots in the electrical interfaces.

What's more,
AMPACT taps can be used to connect
multiple conductor combinations,
It's Boltless and re-usable two-piece connector

Why wait? Contact us now.

Follow us on:     

TAP CONNECTORS FOR BARE OVERHEAD CONDUCTOR

Fired Mini Wedge & Fired Wedge Connector



- Conforms to IS 5561 & ANSI C 119.4 (class AA)
- Taps can be used to connect multiple conductor combinations
- Re-usable two-piece connector
- Boltless & Maintenance free connection
- Smart "C" member with elastic property ensure constant force throughout the life
- The wedge is inserted at a very high-speed using the AMPACT connector tool & booster
- C body & wedge surface is coated by special inhibitor compound

Model	Type of Al Conductor Combination	Conductor Dia. (in mm)	PCN	Unit Rate (INR)
Fired Wedge Connector (Al)	DOG-DOG	14.15-14.15	AJA4010014	1208
	COYOTE-DIA.12PADDLE	15.89-12		
	RACoon-RACoon	12.27-12.27		
	DOG-RABBIT	14.15-10.05	AJA4010016	1340
	DOG-DIA.12PADDLE	14.15-12		
	DOG-DOG	14.15-14.15		
	LEOPARD-LEOPARD	15.81-15.81	AJA4010013	1380
	COYOTE-COYOTE	15.89-15.89		
	RABBIT-DIA.12PADDLE	10.05-12		
	RABBIT-COYOTE	10.05-15.89	AJA4010012	2704
	WOLF-DOG	18.14-14.15		
	PANTHER-DOG	21-14.15		
	LYNX-LYNX	19.53-19.53	AJA4010020	3710
	PANTHER-DIA.18PADDLE	21-18		
	PANTHER-PANTHER	21-21		
	WOLF-DIA.18PADDLE	18.14-18	AJA4010017	3832
	WOLF-WOLF	18.14-18.14		
	WOLF-LYNX	18.14-19.53		
	LYNX-COYOTE	19.53-15.89	AJA4010029	4298
	LYNX-DIA.18PADDLE	19.53-18		
	LYNX-LYNX	19.53-19.53		
	DRAKE-COYOTE	28.13-15.89	AJA4010109	4360
	ZEBRA-COYOTE	28.62-15.89		
	KUNDAH-ZEBRA	26.8-28.62		
	DRAKE-DRAKE	28.13-28.13	AJA4010025	5512
	ZEBRA-ZEBRA	28.62-28.62		
	ZEBRA-DIA.27PADDLE	28.62-27		
	DRAKE-DIA.27PADDLE	28.13-27	AJA4010105	5644
	MOOSE-ZEBRA	31.77-28.62		
	MOOSE-DRAKE	31.77-28.13		
	MOOSE-DIA.27PADDLE	31.77-27		
	MORKULLA-ZEBRA	31.6-28.62		
	MOOSE-KUNDAH	31.77-26.8		
	MOOSE-BERSIMIS	31.77-35.05		
	TARANTULA-ZEBRA	36.62-28.62		
	FALCON-DRAKE	39.24-28.13		

TAP CONNECTORS FOR BARE OVERHEAD CONDUCTOR

Fired Mini Wedge & Fired Wedge Connector



- Conforms to IS 5561 & ANSI C 119.4 (class AA)
- Taps can be used to connect multiple conductor combinations
- Re-usable two-piece connector
- Boltless & Maintenance free connection
- Smart "C" member with elastic property ensure constant force throughout the life
- The wedge is inserted at a very high-speed using the AMPACT connector tool & booster
- C body & wedge surface is coated by special inhibitor compound

Model	Type of Al Conductor Combination	Conductor Dia. (in mm)	PCN	Unit Rate (INR)
Fired Wedge Connector (Al)	TARANTULA-MOOSE	36.62-31.77	AJA4010106	5880
	FALCON-MOOSE	39.24-31.77		
	DRAKE-PANTHER	28.13-21	AJA4010022	6196
	DRAKE-LYNX	28.13-19.53		
	DEER-PANTHER	29.89-21		
	ZEBRA-PANTHER	28.62-21		
	MORKULLA-MORKULLA	31.6-31.6	AJA4010110	6300
	SNOWBIRD-SNOWBIRD	30.56-30.56		
	MOOSE-MOOSE	31.77-31.77	AJA4010146	6772
	TARANTULA-WOLF	36.62-18.14		
	TARANTULA-PANTHER	36.62-21		
	TARANTULA-TARANTULA	36.62-36.62	AJA4010112	7036
	LAPWING-LAPWING	38.2-38.2		
	FALCON-FALCON	39.24-39.24	AJA4010030	7712
	DOG-ZEBRA	14.15-28.62		
	GOAT-DIA.18PADDLE	25.97-18	AJA4010063	8260
	MOOSE-LYNX	31.77-19.53		
	MOOSE-PANTHER	31.77-21	AJA4010026	9100
	GOAT-GOAT	25.97-25.97		
	KUNDAH-KUNDAH	26.8-26.8		
	KUNDAH-DIA.27PADDLE	26.8-27	AJA4010093	9844
	MOOSE-DOG	31.77-14.15		
	GOAT-PANTHER	25.97-21	AJA4010028	10000
	ZEBRA-WOLF	28.62-18.14		
	DRAKE-LYNX	28.13-19.53		
	ZEBRA-LYNX	28.62-19.53		
	BERSIMIS-DRAKE	35.05-28.13	AJA4010149	10238
	BERSIMIS-ZEBRA	35.05-28.62		

TAP CONNECTORS FOR BARE OVERHEAD CONDUCTOR

Fired Mini Wedge Connector



Model	Type of Al Conductor Combination	Conductor (sq.mm.)	PCN	Unit Rate (INR)
Mini Wedge (Al)	RACCON-DOG	12.27-14.15/	AJA4010167	1340
	DOG-DOG	14.15-14.15		
	RACCON-RABBIT	14.15-14.15	AJA4030023	1340
	RACCON-WEASEL	12.27-7.77	AJA4010067	1498
	50-70 SQ. MM-50-70 SQ. MM	9-10.5	AJA4030320	868

Universal Distribution Connector



Model	Type of Al Conductor Combination	Conductor (sq.mm.)	PCN	Unit Rate (INR)
UDC (Al)	WEASEL-WEASEL	7.77-7.77	AJA4010162	378
	ANT-ANT	9.3-9.3	AJA4010137	462
UDC Tinplated CU (Al)	GNAT-GNAT	6.63-6.63	AJA4010107	630
	WEASEL-WEASEL	7.77-7.77	AJA4010108	840
	ANT-ANT	9.3-9.3	AJA4010035	840
	RABBIT-RABBIT	10.05-10.05	AJA4010094	998

TAP CONNECTORS FOR BARE OVERHEAD CONDUCTOR

AMPACT Accessories



- Paddle connectors are used to connect Ampact connector to equipment pad / palm connector
- Palm connectors are used to connect Equipment Cu studs with paddle connector

Model	Groove Dia. (mm)	Current Rating (A)	PCN	Unit Rate (INR)
Paddle (Al)	12	610	AJA4010043	682
	18	895	AJA4010070	1030
	27	1400	AJA4030054	1660

Model	Equipment Cu Stud Dia. (mm)	Current Rating (A)	PCN
Palm Connector (Brass)	22	AJA4040066	9712
	30	AJA4040089	9980
	38	AJA4040101	10762
	40	AJA4040019	11288
	50	AJA4040090	11812



Simplyfying cable connections with Raychem RPG's Connectors

Lugs | Ferrule | Overhead Connectors



We have it all

Look at our Cable Lugs, Ferrule and connectors meeting the highest quality requirements and satisfy the required international standards

With State of Art Testing Facilities, we deliver an extensive range for low and medium-voltage applications. Offering distinct phase for easy conductor entry and burr-free edges

Available in

- Copper
- Aluminium
- Bi-metallic

Why wait? Contact us now.

Follow us on:     

TAP CONNECTORS FOR BARE OVERHEAD CONDUCTOR

One-Hole Lugs - Model RLL



- For Copper Conductors, Conductor Range 1.5 – 800 sq mm
- Annealed material ensuring optimized crimping property with flat contact surface
- Precise overall dimension with stud
- Our Copper Lugs are tested according to “Class A” of IEC61238-1 for rated voltages upto 30kV (Um=36kV)

Copper Tube Terminal Medium Duty					
Model	mm ² -E	PCN		List Price (INR) Per Unit	Packing Qty
		Without Window	With Window		
RLL	1.5-5	EBACLA1216	EBACLA1269	9	100
	2.5-5	EBACLA1214	EBACLA1246	12	100
	4-6	EBACLA1209	EBACLA1241	15	100
	6-6	EBACLA1225	EBACLA1257	21	100
	10-8	EBACLA1220	EBACLA1252	28	100
	16-10	EBACLA1237	EBACLA1266	45	100
	25-10	EBACLA1232	EBACLA1260	50	100
	35-6	DAA1303389	DAA1302038	60	100
	35-10	DAA1303391	DAA1302002	60	100
	50-16	DAA1303398	DAA1302060	90	100
	70-16	DAA1303403	DAA1302046	132	100
	95-16	DAA1303408	DAA1302013	180	100
	120-16	DAA1303413	DAA1302017	252	100
	150-16	DAA1303418	DAA1302021	358	100
	185-12	DAA1303421	DAA1302023	510	100
	185-16	DAA1303423	DAA1302024	510	100
	240-16	DAA1303428	DAA1302027	714	100
	240-20	DAA1303429	DAA1301263	714	100
	300-16	DAA1303433	DAA1302029	996	100
	400-12	DAA1303436	DAA1301226	1382	50
	400-16	DAA1303438	DAA1302031	1382	50
	500-16	DAA1303442	DAA1301265	1896	50
	500-20	DAA1303443	DAA1301266	1896	50
	500-BL	DAA1303444	DAA1302032	1896	50
	630-16	DAA1303446	DAA1301162	2810	50
	630-20	DAA1303447	DAA1301163	2810	50
	630-BL	DAA1303448	DAA1302033	2810	50
	800-16	DAA1393390	DAA1302067	4164	50
	800-20		DAA1302068	4164	50



COPPER SERIES - LUGS

One-Hole Lugs - Long Barrel - Model RLLB



- For Copper Conductor Range 6 - 1000 Sq mm
- Longer length barrel permits extra crimps for additional assurance on heavy duty loads
- Annealed material ensuring optimized crimping property with flat contact surface
- Precise overall dimension with stud hole
- Our Copper Lugs are tested according to "Class A" of IEC61238-1 for rated voltages upto 30kV (Um=36kV)

Copper Tube Terminal Medium Duty					
Model	mm ² -E	PCN		List Price (INR) Per Unit	Packing Qty
		Without Window	With Window		
RLLB	6-8	DAA1302039	DAA1391481	24	100
	10-8	DAA1393035	DAA1391482	28	100
	16-8	DAA1303516	DAA1391483	46	100
	25-8	DAA1303518	DAA1391486	56	100
	35-8	DAA1303521	DAA1391489	94	100
	50-8	DAA1303524	DAA1391492	154	100
	50-10	DAA1303525	DAA1391493	154	100
	70-8	DAA1303528	DAA1391496	228	100
	70-10	DAA1303529	DAA1391497	228	100
	70-12	DAA1303530	DAA1391498	228	100
	95-10	DAA1303533	DAA1391502	360	100
	95-12	DAA1303534	DAA1391503	360	100
	120-10	DAA1303537	DAA1391507	496	100
	120-12	DAA1303538	DAA1391508	496	100
	120-16	DAA1303540	DAA1391510	496	100
	150-10	DAA1303542	DAA1391513	598	100
	150-12	DAA1303543	DAA1391514	598	100
	150-16	DAA1303545	DAA1391516	598	100
	185-12	DAA1303548	DAA1391520	790	100
	185-16	DAA1303550	DAA1391522	790	100
	240-16	DAA1303555	DAA1391528	1198	100
	240-20	DAA1303556	DAA1391529	1198	100
	300-16	DAA1303560	DAA1391533	1634	100
	300-20	DAA1303561	DAA1391534	1634	100
	400-20	DAA1303566	DAA1391539	2686	50
	500-20	DAA1303570	DAA1391544	3528	50
	630-20	DAA1303574	DAA1391549	4932	50
	1000-20	DAA1303646	DAA1391554	10312	50



COPPER SERIES - LUGS

One-Hole Lugs - Heavy Duty - Model RLHV



- For Copper Conductor, Range 25 - 630 Sq mm
- Heavy duty Lugs are specially designed to the standard medium voltage applications upto 33 KV
- Annealed material ensuring optimized crimping property with flat contact surface
- Precise overall dimension with stud hole
- Our Copper Lugs are tested according to "Class A" of IEC61238-1 for rated voltages upto 30kV (Um=36kV)

Copper Tube Terminal Medium Duty					
Model	mm ² -E	PCN		List Price (INR) Per Unit	Packing Qty
		Without Window	With Window		
RLHV	25-8	DAA1391284	DAA1391260	158	100
	35-8	DAA1393834	DAA1393117	296	100
	50-8	DAA1393835	DAA1393121	384	100
	70-10	DAA1303104	DAA1393126	446	100
	95-12	DAA1390054	DAA1391267	640	100
	120-12	DAA1391294	DAA1391259	756	100
	150-12	DAA1391296	DAA1391271	1052	100
	185-12	DAA1393320	DAA1393147	1140	100
	240-16	DAA1393323	DAA1393155	1222	100
	300-16	DAA1393325	DAA1391842	2542	50
	400-20	DAA1391303	DAA1391278	4222	50
	500-20	DAA1391305	DAA1391280	4928	50
	630-20	DAA1391307	DAA1391282	5338	50



COPPER SERIES - LUGS

Four-Hole Lugs - Transformer Lugs - Model RLT 4E



- For Copper Conductor, Range 400 - 1000 Sq mm
- Heavy Duty lugs for transformer Application
- Annealed material optimizes material and crimping properties with flat contact surface and precise stud hole
- Annealed material ensuring optimized crimping property with flat contact surface
- Precise overall dimension with stud hole
- Our Copper Lugs are tested according to "Class A" of IEC61238-1 for rated voltages upto 30kV (Um=36kV)

Four Hole- TransformerLugs				
Model	mm ² -E	PCN	List Price (INR) Per Unit	Packing Qty
		With Window		
RLT	400 4E-10	DAA1301317	2356	50
	400 4E-12	DAA1393179	2356	50
	400 4E-BL	DAA1393193	2356	50
	500 4E-10	DAA1301318	3046	50
	500 4E-12	DAA1393184	3046	50
	500 4E-14	DAA1393779	3046	50
	500 4E-BL	DAA1393194	3046	50
	630 4E-8	DAA1301426	4636	50
	630 4E-10	DAA1302036	4636	50
	630 4E-12	DAA1301316	4636	50
	630 4E-14	DAA1393780	4636	50
	630 4E-16	DAA1393188	4636	50
	630 4E-BL	DAA1393195	4636	50
	800 4E-10	DAA1302037	6946	50
	800 4E-20	DAA1393191	6946	50
	1000 4E-20	DAA1393192	10212	50



ALUMINIUM SERIES - LUGS & FERRULE

One-Hole Lugs – Aluminium Lugs for XLPE Cables – Model RALX



- For Aluminium Conductor, Range 16 - 1000 Sq mm
- Designed to accept a variety of conductor forms especially low stranded compact conductors
- With lower dead weight Aluminium conductors popular choice in power distribution applications


Model	mm ² -E	PCN	List Price (INR) Per Unit	Packing Qty
RALX	RALX 16-6	DAA1393931	18	500
	RALX 25-8	DAA1393915	18	500
	RALX 35-8	DAA1393916	26	100
	RALX 50-10	DAA1393917	40	100
	RALX 0-10	DAA1393918	54	50
	RALX 95-12	DAA1393919	84	50
	RALX 120-12	DAA1393920	108	50
	RALX 150-12	DAA1393921	156	20
	RALX 185-12	DAA1393922	206	20
	RALX 240-12	DAA1393924	284	10
	RALX 240-16	DAA1393936	284	10
	RALX 300-12	DAA1393937	370	10
	RALX 300-20	DAA1393925	370	10
	RALX 400-16	DAA1393939	592	5
	RALX 400-20	DAA1393926	626	5
	RALX 500-16	DAA1393940	838	5
	RALX 500-20	DAA1393927	838	5
	RALX 630-16	DAA1393941	1176	3
	RALX 630-20	DAA1393928	1176	3
	RALX 800-20	DAA1393929	1590	3
	RALX 1000-20	DAA1393930	3388	2

* Order to be booked in multiple of packing qty only.
Blank palm can be provided on special request.



BI-METALLIC SERIES - LUGS & FERRULE

In line Connectors - Bi-Metallic - Model RACC

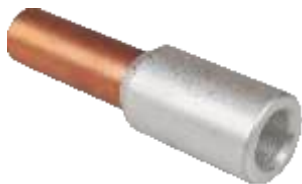

- For Aluminium & Copper Conductor, Range 10-630 Sq mm
- For tapping into unbroken continuous main, as a wire joint or two-way splice
- Wide wire range-taking capability minimizes inventory requirements
- High conductivity electrolytic copper confirming to IS 1997 & aluminium of grade IE of IS 5082

Bi-metallic Connectors (Friction Welded)				
Model	mm ² -E	PCN	List Price (INR) Per Unit	Packing Qty
RACC	16-10	DAA1390252	404	100
	25-16	DAA1301634	438	100
	35-16	DAA1301635	490	100
	35-25	DAA1301636	516	100
	50-25	DAA1301638	562	100
	50-35	DAA1391986	620	100
	70-35	DAA1301639	678	100
	70-50	DAA1301640	730	100
	95-50	DAA1301643	792	100
	95-70	DAA1301644	804	100
	120-70	DAA1301646	846	100
	120-95	DAA1301647	942	100
	150-95	DAA1301649	1010	100
	150-120	DAA1301650	1100	100
	185-120	DAA1301652	1244	100
	185-150	DAA1301653	1352	100
	240-150	DAA1301657	1476	100
	240-185	DAA1391987	1662	100



ALUMINIUM SERIES - LUGS & FERRULE

One-Hole Lugs - Bi-Metallic - Model RACL



- For Aluminium & Copper Conductor, Range 10-630 Sq mm
- For tapping into unbroken continuous main, as a wire joint or two-way splice
- Wide wire range-taking capability minimizes inventory requirements
- High conductivity electrolytic copper confirming to IS 1997 & aluminium of grade IE of IS 5082

Aluminium In Line Connectors				
Model	mm ² -E	PCN	List Price (INR) Per Unit	Packing Qty
RACL	25-10	DAA1301624	530	100
	35-10	DAA1301625	618	100
	50-12	DAA1301831	812	100
	70-12	DAA1301998	850	100
	95-12	DAA1301830	906	100
	120-12	DAA1301629	970	100
	150-12	DAA1301630	1180	100
	185-12	DAA1301631	1326	100
	240-12	DAA1301632	1768	100
	300-16	DAA1301732	1940	100
	400-16	DAA1303182	2364	50
	500-20	DAA1391983	4576	50
	630-20	DAA1390081	5624	50



Solutions to all your clamping problems with Raychem RPG's Clamping

Cable Ties | Bands & Buckles | Identification System



**Bundle your cables and wires together to
keep them organized and prevent damage**

Presenting Clamping solutions for the perfect choice for indoor, outdoor, underground, harsh and demanding applications.

Self Locking mechanism for fast and easy installation with rounded edges and Smooth Surfaces for safe handling.

Flame Retardant, Non-Toxic and Halogen Free, Ideal for applications where Corrosion, Vibration, Radiation and Temperature extremes are concerned.

Superior corrosion resistance in industrial and marine atmospheres, salt water and chemical environments.

Why wait? Contact us now.

Follow us on:     



CABLE TIES

Wedge Lock Mechanism System - Model Ball Lock Cable Ties (Coated)



- Material : A) 316 grade non-magnetic stainless steel
- Flammability Rating : UL94 fireproof, Halogen free and UV-resistant
- Surface Finish : Pure Polyester and Epoxy Coatings
- Temperature Range : -60°C to +300°C
- Self-Locking mechanism for fast and easy installation
- Rounded edges and Smooth Surfaces for safe handling
- Ideal for applications where Corrosion, Vibration, Radiation and Temperature extremes are concerned
- Multi-coloured cable ties are available upon request
- 304 grade non-magnetic stainless steel available on request

Ball Lock Coated - 4.6mm width, 0.25mm thickness

Model	Length in mm	Max Dia. Single Loop in mm	PCN	List Price (INR) Per Unit	Package Qty
Ball Lock Cable Ties (Coated)	100	18	DAA1000011	18	100
	150	34	DAA1000032	22	100
	200	50	DAA1000033	22	100
	250	66	DAA1000645	26	100
	260	69	DAA1000075	26	100
	300	82	DAA1000034	28	100
	360	100	DAA1000009	30	100
	400	114	DAA1000768	34	100
	450	130	DAA1000660	36	100
	520	151	DAA1000010	40	100
	620	183	DAA1000563	46	100
	680	203	DAA1000179	48	100
	840	253	DAA1000197	56	100
	1000	304	DAA1014518	64	100

Ball Lock Coated - 7.9mm width, 0.25mm thickness

Model	Length in mm	Max Dia. Single Loop in mm	PCN	List Price (INR) Per Unit	Package Qty
Ball Lock Cable Ties (Coated)	100	18	DAA1000035	28	100
	150	34	DAA1000036	30	100
	200	50	DAA1000076	36	100
	250	66	DAA1000615	40	100
	260	69	DAA1000037	40	100
	300	82	DAA1000077	42	100
	360	100	DAA1000038	46	100
	400	114	DAA1000600	54	100
	450	130	DAA1014330	56	100
	520	151	DAA1000078	64	100
	620	183	DAA1000564	74	100
	680	203	DAA1000039	76	100
	840	253	DAA1000397	90	100
	1000	304	DAA1000198	106	100

**Wedge Lock Mechanism System - Model Ball Lock Cable Ties (Un-Coated)**

- Material : A) 316 grade non-magnetic stainless steel
- Flammability Rating : UL94 fireproof, Halogen free and UV-resistant
- Surface Finish : Metallic
- Temperature Range : -60°C to +300°C
- Self-Locking mechanism for fast and easy installation
- Rounded edges and Smooth Surfaces for safe handling
- Ideal for applications where Corrosion, Vibration, Radiation and Temperature extremes are concerned
- Multi-coloured cable ties are available upon request
- 304 grade non-magnetic stainless steel available on request

Ball Lock Coated - 4.6mm width, 0.25mm thickness

Model	Length in mm	PCN	List Price (INR) Per Unit	Package Qty
Ball Lock Cable Ties (Un-Coated)	100	DAA1000108	14	100
	150	DAA1000081	15	100
	200	DAA1000082	16	100
	260	DAA1000099	18	100
	300	DAA1000084	20	100
	360	DAA1000085	22	100
	400	DAA1015323	26	100
	450	DAA1000086	27	100
	520	DAA1000139	28	100
	620	DAA1000311	30	100
	680	DAA1000362	34	100
	840	DAA1000199	40	100
	1000	DAA1000430	42	100

Ball Lock Coated - 7.9mm width, 0.25mm thickness

Model	Length in mm	PCN	List Price (INR) Per Unit	Package Qty
Ball Lock Cable Ties (Un-Coated)	100	DAA1000001	22	100
	150	DAA1000002	26	100
	200	DAA1000052	28	100
	260	DAA1000071	30	100
	300	DAA1000116	34	100
	360	DAA1000004	36	100
	450	DAA1000782	40	100
	520	DAA1000088	46	100
	620	DAA1000284	48	100
	680	DAA1000089	54	100
	840	DAA1000248	64	100
	1000	DAA1000399	70	100

BANDS(STRAPS) & BUCKLES (CLIPS)

Bands (Straps) - Model Bands for Corrosive Atmospheric Application



- Superior corrosion resistance in corrosive industrial and marine atmospheres, salt water and chemical environments
- Packed in easy-to-use plastic tote dispensers, available in 4 colour codes based on band widths. Carton box packing also available
- Application Tools : RR-T03, RR-B04

Bands (Straps) & Buckles (Clips)

Model	Material	Width	Thickness	Finished Length	PCN	List Price (INR) Per Unit	Packing Type
		mm	mm	mm			
Regular Bands	SS304	6.5	0.5	30.5	DAA1015182	1786	Corrugate
		6.5	0.5	30.5	DAA1000534	1946	Red Tote
		9.5	0.65	30.5	DAA1015183	3184	Corrugate
		9.5	0.65	30.5	DAA1000580	3346	Red Tote
		12.7	0.75	30.5	DAA1015184	4784	Corrugate
		12.7	0.75	30.5	DAA1000581	4948	Yellow Tote
		16	0.75	30.5	DAA1015185	5964	Corrugate
		16	0.75	30.5	DAA1000613	6130	Grew Tote
		19	0.75	30.5	DAA1015186	7040	Corrugate
		19	0.75	30.5	DAA1000609	7204	Blue Tote
	SS316	6.5	0.5	30.5	DAA1015187	2248	Corrugate
		6.5	0.5	30.5	DAA1000636	2410	Red Tote
		9.5	0.65	30.5	DAA1015188	3980	Corrugate
		9.5	0.65	30.5	DAA1000637	4144	Red Tote
		12.7	0.75	30.5	DAA1015189	6012	Corrugate
		12.7	0.75	30.5	DAA1000610	6174	Yellow Tote
		16	0.75	30.5	DAA1015190	7514	Corrugate
		16	0.75	30.5	DAA1000612	7678	Grew Tote
		19	0.75	30.5	DAA1015191	8880	Corrugate
		19	0.75	30.5	DAA1000611	9044	Blue Tote
Regular Bands for High Tensile Application	SS201	6.5	0.5	30.5	DAA1015177	1666	Corrugate
		6.5	0.5	30.5	DAA1000856	1830	Red Tote
		9.5	0.65	30.5	DAA1015178	2954	Corrugate
		9.5	0.65	30.5	DAA5000032	3120	Red Tote
		12.7	0.75	30.5	DAA1015179	4434	Corrugate
		12.7	0.75	30.5	DAA5000033	4596	Yellow Tote
		16	0.75	30.5	DAA1015180	5526	Corrugate
		16	0.75	30.5	DAA5000034	5688	Grew Tote
		19	0.75	30.5	DAA1015181	6516	Corrugate
		19	0.75	30.5	DAA5000035	6680	Blue Tote
Regular Bands - Economical Value Application	SS430	6.5	0.5	30.5	DAA1015192	1278	Corrugate
		9.5	0.65	30.5	DAA1015193	2076	Corrugate
		9.5	0.65	30.5	DAA1014643	2240	Red Tote
		12.7	0.75	30.5	DAA1015194	3078	Corrugate
		12.7	0.75	30.5	DAA1014626	3242	Yellow Tote
		16	0.75	30.5	DAA1015195	3816	Corrugate
		16	0.75	30.5	DAA1014625	3980	Blue Tote
		19	0.75	30.5	DAA1015196	4490	Corrugate
		19	0.75	30.5	DAA1014459	4652	Blue Tote

BANDS(STRAPS) & BUCKLES (CLIPS)

Bands (Straps) - Model PPA 571 Coated Bands for Highly Corrosive Applications



- PPA 571 (Performance Polymer Alloy Coating)
- PPA 571 is a thermoplastic coating powder specifically designed to provide a longlasting, tough coating for exterior applications to mild steel, Stainless steel and Aluminium
- PPA 571 is based on an alloy of acid modified Polyolefins. Therefore it is halogen free and the combustion byproducts are low in smoke and have a low toxicity index
- Resistant to adverse weather conditions, detergents, salt spray and typical airborne pollutants. The material provides excellent resistance to stress cracking on bending, good abrasion and impact resistance
- Coating maintains excellent adhesion to the metal substrate without the need for a separate primer
- Application : Chemical, Petrochemical, Subsea and Mining Industries
- Application tool : RR - B04

Model	Material	Width	Thickness	Finished Length	PCN	List Price (INR) Per Unit	Packing Type
		mm	mm	mm			
PPA Coated (Bands for Highly Corrosive Applications)	SS304	6.5	1.1	25	DAA1014672	6652	Red Tote
		9.5	1.1	25	DAA1014675	7134	Red Tote
		16	1.1	25	DAA1000590	8172	Grew Tote
		19	1.1	25	DAA1000589	8648	Blue Tote
		6.5	1.1	25	DAA1000629	6976	Red Tote
		9.5	1.1	25	DAA1000521	7602	Red Tote
		12.7	1.1	25	DAA1000607	8274	Yellow Tote
		16	1.1	25	DAA1000523	8962	Grew Tote
		19	1.1	25	DAA1000536	9592	Blue Tote



BANDS(STRAPS) & BUCKLES (CLIPS)

Buckle (Clips) - Model Jaw Type Buckle (Coated & Un-coated)

Buckle (Clips) - Model Wing Type Buckle (Coated & Un-coated)



Jaw Type



Wing Type

- Buckles are used in conjunction with bands for secure fastening
- Buckles are available in SS316, SS304, Ss201 & SS430. Jaw, Wing & Scre type which can be used based on Standard / Light / Heavy Duty Application

Bands (Straps) & Buckles (Clips)

Model	Material	Finished Length mm	PCN	List Price (INR) Per Unit	Packing Type
Uncoated Jaw Type Buckle	SS201	6.5	DAA1000801	12	100
		9.5	DAA1000763	18	100
		12.7	DAA1000592	30	100
		16	DAA1000593	36	100
		19	DAA1000594	46	100
		20	DAA1000802	48	100
	SS304	6.5	DAA1000028	12	100
		9.5	DAA1000030	18	100
		12.7	DAA1000602	30	100
		16	DAA1000031	36	100
		19	DAA1000775	46	100
	SS316	9.5	DAA1000630	22	100
		12.7	DAA1000604	34	100
		16	DAA1000605	42	100
		19	DAA1000606	54	100
Uncoated Wing Type Buckle	SS201	6.5	DAA1014677	12	100
		9.5	DAA1000808	18	100
		12.7	DAA1000583	22	100
		16	DAA1014678	26	100
		19	DAA1000546	30	100
	SS304	6.5	DAA1014679	12	100
		9.5	DAA1000647	18	100
		10	DAA1014687	18	100
		12.7	DAA1014680	22	100
		16	DAA1014681	26	100
		19	DAA1000661	30	100
	SS316	6.5	DAA1014682	12	100
		9.5	DAA1000684	18	100
		12.7	DAA1000525	26	100
		16	DAA1000046	28	100
		19	DAA1000539	34	100

RR-G01 Cable Tie Automatic Gun



- Easy to install automatic gun, with single hand operation
- Cable tie side entry for immediate positioning of tie & tool
- Controlled tension & fully adjustable to achieve desired tension
- Easy and automatic removal of excess tie length with auto cut-off
- Applicable for 4.6 & 7.9mm Ball Lock Cable Ties

PCN	List Price (INR) Per Unit
DAA1000136	18282

RR-P02 Cable Tensioning Plier



- Hand operated tools with installer-controlled tension and cut off
- Cable tie side entry for immediate positioning of tie & tool
- Easy removal of excess tie length. Lever actuated cut-off
- Rugged, lightweight, easy to operate Plier type tool provides mechanical advantage

PCN	List Price (INR) Per Unit
DAA1000065	13092

RR-T03 Band and Buckle Crimping Tool



- Band & Buckle Crimping tool features a spring-loaded gripper lever for more efficient strap handling
- Cut-off handle is vinyl coated for easier operation
- Standard Blue coating finish provides superior corrosion resistance and enhances life
- Applicable for Uncoated bands-upto 20mm width & thickness 1.2mm

PCN	List Price (INR) Per Unit
DAA1000113	14892

Other Tools Available
RR-B04 (Bantam Tool)



- [Applicable for Cable Ties & Bands & Buckles]
- All sizes - Cable Ties & Coated band 20mm & thickness 1.2mm

PCN	List Price (INR) Per Unit
DAC1000005	28942

(Applicable for Cable Ties & Bands & Buckles)



PCN	List Price (INR) Per Unit
DAC1000004	1494

RR-R06 (Ratchet Tool)

(Applicable for Bands & Buckles only)



PCN	List Price (INR) Per Unit
DAC1000002	22468

ENCLOSURES



ALUMINIUM ENCLOSURES

Industrial Junction Box



- Material provide high impact strength and rigidity
- Superior working temperature of -40 °C to 135 °C
- Excellent dimensional stability and electrical properties
- Good resistance to chemical attack (painted)
- Good heat sinks properties

Technical Data	
Material	AlSi12, as per DIN EN 1706
Components	Fastening threads M4 / M6 in the enclosure bottom
Lid Screw	Stainless Steel, Captive Screw
Tighting Torque	5 Nm
Gasket	Neoprene / Silicone
Mechanical Strength	Accordance With EN/IEC 60079-0, Impact energy > 7 Nm
Protection Class	IEC/EN 60529, IP 66
Standard Color	Natural / Powder coated (RAL7001 - Structured)
Certified	CE 

ALUMINIUM ENCLOSURES

Model	Size (l x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
AL	50 x 45 x 30	Uncoated	Neoprene	DAA4000532	446
			Silicon	DAA4100174	434
		Powder Coated	Neoprene	DAA4100001	500
			Silicon	DAA4100195	500
	98 x 64 x 34	Uncoated	Neoprene	DAA4100064	834
			Silicon	DAA4100176	856
		Powder Coated	Neoprene	DAA4100012	964
			Silicon	DAA4100197	990
	150 x 64 x 34	Uncoated	Neoprene	DAA4100065	1418
			Silicon	DAA4100177	1418
		Powder Coated	Neoprene	DAA4100022	1612
			Silicon	DAA4100198	1612
	58 x 64 x 34	Uncoated	Neoprene	DAA4100066	614
			Silicon	DAA4100175	624
		Powder Coated	Neoprene	DAA4100087	708
			Silicon	DAA4100196	716
	75 x 80 x 57	Uncoated	Neoprene	DAA4100018	1050
			Silicon	DAA4100178	1074
		Powder Coated	Neoprene	DAA4100056	1222
			Silicon	DAA4100199	1246
	125 x 80 x 57	Uncoated	Neoprene	DAA4100019	1340
			Silicon	DAA4100179	1362
		Powder Coated	Neoprene	DAA4100006	1588
			Silicon	DAA4100200	1612
	175 x 80 x 57	Uncoated	Neoprene	DAA4100036	1860
			Silicon	DAA4100180	1932
		Powder Coated	Neoprene	DAA4100032	2190
			Silicon	DAA4100493	2250
	250 x 80 x 54	Uncoated	Neoprene	DAA4100226	2384
			Silicon	DAA4100181	2438
		Powder Coated	Neoprene	DAA4100149	2812
			Silicon	DAA4100379	2866
	100 x 100 x 81	Uncoated	Neoprene	DAA4100073	2242
			Silicon	DAA4100182	2260
		Powder Coated	Neoprene	DAA4100057	2546
			Silicon	DAA4100543	2570
	160 x 100 x 81	Uncoated	Neoprene	DAA4100029	2640
			Silicon	DAA4100183	2654
		Powder Coated	Neoprene	DAA4100058	3070
			Silicon	DAA4100616	3074
	122 x 120 x 81	Uncoated	Neoprene	DAA4100068	2982
			Silicon	DAA4100184	2996
		Powder Coated	Neoprene	DAA4100011	3396
			Silicon	DAA4100205	3410
	220 x 120 x 90	Uncoated	Neoprene	DAA4100069	4480
			Silicon	DAA4100187	4564
		Powder Coated	Neoprene	DAA4100085	5140
			Silicon	DAA4100498	5224

ALUMINIUM ENCLOSURES

Model	Size (l x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
AL	260 x 160 x 90	Uncoated	Neoprene	DAA4100037	6042
			Silicon	DAA4100189	6090
		Powder Coated	Neoprene	DAA4100041	6962
			Silicon	DAA4100495	7010
	360 x 160 x 90	Uncoated	Neoprene	DAA4100104	8034
			Silicon	DAA4100190	8082
		Powder Coated	Neoprene	DAA4100081	9244
			Silicon	DAA4100496	9290
	280 x 230 x 110	Uncoated	Neoprene	DAA4100071	7740
			Silicon	DAA4100191	7812
		Powder Coated	Neoprene	DAA4100047	9132
			Silicon	DAA4100212	9210
	330 x 230 x 110	Uncoated	Neoprene	DAA4100160	9788
			Silicon	DAA4100193	9898
		Powder Coated	Neoprene	DAA4100059	11370
			Silicon	DAA4100214	11484
	200 x 230 x 110	Uncoated	Neoprene	DAA4100079	6852
			Silicon	DAA4100192	6922
		Powder Coated	Neoprene	DAA4100086	7950
			Silicon	DAA4100213	8020
	330 x 230 x 180	Uncoated	Neoprene	DAA4100080	13244
			Silicon	DAA4100194	13362
		Powder Coated	Neoprene	DAA4100083	15300
			Silicon	DAA4100215	15410
	220 x 120 x 81	Uncoated	Neoprene	DAA4100153	4228
			Silicon	DAA4100186	4316
		Powder Coated	Neoprene	DAA4100045	4852
			Silicon	DAA4100207	4940
	122 x 120 x 91	Uncoated	Neoprene	DAA4100150	3124
			Silicon	DAA4100185	3140
		Powder Coated	Neoprene	DAA4100094	3566
			Silicon	DAA4100494	3582
	180 x 180 x 100	Uncoated	Neoprene	DAA4100330	5552
			Silicon	DAA4101449	5730
		Powder Coated	Neoprene	DAA4100279	6352
			Silicon	DAA4100634	6542
	280 x 180 x 100	Uncoated	Neoprene	DAA4100332	7506
			Silicon	DAA4101450	7692
		Powder Coated	Neoprene	DAA4100290	8626
			Silicon	DAA4101429	8816
	200 x 230 x 180	Uncoated	Neoprene	DAA4100224	10194
			Silicon	DAA4100312	10262
		Powder Coated	Neoprene	DAA4100252	11618
			Silicon	DAA4101451	13136
	400 x 310 x 110	Uncoated	Neoprene	DAA4100251	15792
			Silicon	DAA4101452	16180
		Powder Coated	Neoprene	DAA4100227	18118
			Silicon	DAA4101439	18510

ALUMINIUM ENCLOSURES

Model	Size (l x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
AL	400 x 310 x 180	Uncoated	Neoprene	DAA4100287	29964
			Silicon	DAA4101454	30352
		Powder Coated	Neoprene	DAA4100223	32868
			Silicon	DAA4101453	33258
	600 x 310 x 110	Uncoated	Neoprene	DAA4100420	27676
			Silicon	DAA4101456	28180
		Powder Coated	Neoprene	DAA4100271	30946
			Silicon	DAA4101455	31450
	600 x 310 x 180	Uncoated	Neoprene	DAA4100436	38248
			Silicon	DAA4101458	38756
		Powder Coated	Neoprene	DAA4100270	42306
			Silicon	DAA4101457	42810
	400 x 230 x 110	Uncoated	Neoprene	DAA4100299	12942
			Silicon	DAA4100313	13294
		Powder Coated	Neoprene	DAA4100269	14802
			Silicon	DAA4100954	15146
	140 x 140 x 90	Uncoated	Neoprene	DAA4100479	4074
			Silicon	DAA4101459	4104
		Powder Coated	Neoprene	DAA4100406	4604
			Silicon	DAA4100593	4626
	200 x 140 x 90	Uncoated	Neoprene	DAA4100405	4812
			Silicon	DAA4101448	4852
		Powder Coated	Neoprene	DAA4100404	5490
			Silicon	DAA4101438	5538

ALUMINIUM ENCLOSURES

ATEX - Junction Box



- Material provide high impact strength and rigidity
- Superior working temperature of -40° Celsius to 135° Celsius ability and electrical properties
- Good resistance to chemical attack (painted)
- Good heat sinks properties

Technical Data	
Material	AlSi12, as per DIN EN 1706
Components	Fastening threads M4 / M6 in the enclosure bottom
Lid Screw	Stainless Steel, Captive Screw
Tighting Torque	5 Nm
Gasket	Silicone
Mechanical Strength	Accordance With EN/IEC 60079-0, Impact energy > 7 Nm
Protection Class	IEC/EN 60529, IP 66
Standard Color	Natural / Powder coated (RAL7001 - Structured)
Certified	    



One Stop Solution for Cable Junction Box

JnEXT Range of Enclosure for different industries and applications

Aluminum | GRP | Stainless Steel | Mild Steel



**Providing Safety and Reliability
for protection system**

Junction box is an earthed enclosure within which wires, cables and circuits can be safely connected.

Features:

- Flexible provision for Earthing, Din rail and Mounting plate
- Excellent dimensional stability and electrical properties
- Provides high resistance to corrosion and ensures performance of equipment
- Good resistance to chemical attack (painted)
- IP 66 and IP 67 & IP 68 on request

**What's more,
Explore wide range of Jnext Junction box offered
for circuit protection system**

Why wait? Contact us now.

Follow us on:     

ALUMINIUM ENCLOSURES

Model	Size (l x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
AL - ATX	100 x 100 x 80	Uncoated	Silicon	DAA4200009	2686
		Powder Coated		DAA4200029	3016
	122 x 120 x 80	Uncoated		DAA4200011	3480
		Powder Coated		DAA4200031	3916
	122 x 120 x 90	Uncoated		DAA4200017	3628
		Powder Coated		DAA4200037	4096
	125 x 80 x 57	Uncoated		DAA4200006	1736
		Powder Coated		DAA4200026	2002
	140 x 140 x 90	Uncoated		DAA4200259	4712
		Powder Coated		DAA4100759	5272
	150 x 64 x 34	Uncoated		DAA4200004	1774
		Powder Coated		DAA4200024	1978
	160 x 100 x 80	Uncoated		DAA4200010	3124
		Powder Coated		DAA4200030	3574
	160 x 160 x 90	Uncoated		DAA4200016	5310
		Powder Coated		DAA4200036	5988
	175 x 80 x 57	Uncoated		DAA4200007	2338
		Powder Coated		DAA4200027	2680
	180 x 180 x 100	Uncoated		DAA4200251	6448
		Powder Coated		DAA4200158	7298
	200 x 140 x 90	Uncoated		DAA4200260	5506
		Powder Coated		DAA4200147	6228
	200 x 230 x 110	Uncoated		DAA4200019	7702
		Powder Coated		DAA4200039	8854
	200 x 230 x 180	Uncoated		DAA4200253	11258
		Powder Coated		DAA4200152	12770
	220 x 120 x 80	Uncoated		DAA4200012	4940
		Powder Coated		DAA4200032	5596
	220 x 120 x 90	Uncoated		DAA4200013	5202
		Powder Coated		DAA4200033	5904
	250 x 80 x 54	Uncoated		DAA4200008	2882
		Powder Coated		DAA4200028	3332
	260 x 160 x 90	Uncoated		DAA4200014	6822
		Powder Coated		DAA4200034	7796
	280 x 180 x 100	Uncoated		DAA4200252	8510
		Powder Coated		DAA4200151	9696
	280 x 230 x 110	Uncoated		DAA4200018	8652
		Powder Coated		DAA4200038	10124
	330 x 230 x 110	Uncoated		DAA4200020	10862
		Powder Coated		DAA4200040	12538
	330 x 230 x 180	Uncoated		DAA4200021	14516
		Powder Coated		DAA4200041	16680
	360 x 160 x 90	Uncoated		DAA4200015	8922
		Powder Coated		DAA4200035	10194
	400 x 230 x 110	Uncoated		DAA4200258	14460
		Powder Coated		DAA4200157	16424
	404 x 313 x 110	Uncoated		DAA4200254	17482
		Powder Coated		DAA4200153	19934
	404 x 313 x 180	Uncoated		DAA4200255	32448
		Powder Coated		DAA4200154	35518
	58 x 64 x 34	Uncoated		DAA4200002	926
		Powder Coated		DAA4200022	1030
	600 x 310 x 110	Uncoated		DAA4200256	30158
		Powder Coated		DAA4200155	33614
	600 x 310 x 180	Uncoated		DAA4200257	41326
		Powder Coated		DAA4200156	45608
	75 x 80 x 57	Uncoated		DAA4200005	1410
		Powder Coated		DAA4200025	1588
	98 x 64 x 34	Uncoated		DAA4200003	1176
		Powder Coated		DAA4200023	1314

GRP ENCLOSURES

Industrial Junction Box



- Fiber Glass, a thermoset polyester material reinforced with fiber glass
- Superior working temperature of -40° C to 150° C
- Flexible provision for Earthing, Din rail and Mounting plate
- IP 66 and IP 67 & IP 68 on request

Technical Data	
Material	Glass reinforced polyester
Flammability	V0 / self-extinguishing, UL 94
Gasket	Silicone
Mechanical Strength	Accordance With EN/IEC 60079-0, Impact energy > 7 Nm
Protection Class	IP 66 to IEC/EN 60529
Standard Color	RAL 7000 / RAL9011
Certified	CE 

GRP ENCLOSURES

Model	Size (L x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
GR	80 X 75 X 55	Black	Neoprene	DAA4300032	1030
			Silicon	DAA4300049	1066
		Grey	Neoprene	DAA4300001	934
			Silicon	DAA4300017	958
	110 X 75 X 55	Black	Neoprene	DAA4300034	1362
			Silicon	DAA4300050	1410
		Grey	Neoprene	DAA4300002	1230
			Silicon	DAA4300018	1270
	122 X 120 X 90	Black	Neoprene	DAA4300035	2116
			Silicon	DAA4300051	2180
		Grey	Neoprene	DAA4300003	1870
			Silicon	DAA4300019	1916
	80 X 75 X 75	Black	Neoprene	DAA4300198	1190
			Silicon	DAA4300204	1230
		Grey	Neoprene	DAA4100881	1066
			Silicon	DAA4300476	1092
	160 X 75 X 55	Black	Neoprene	DAA4300037	1628
			Silicon	DAA4300053	1690
		Grey	Neoprene	DAA4300005	1464
			Silicon	DAA4300021	1512
	160 X 75 X 75	Black	Neoprene	DAA4300038	1746
			Silicon	DAA4300054	1806
		Grey	Neoprene	DAA4300006	1558
			Silicon	DAA4300022	1602
	160 X 160 X 90	Black	Neoprene	DAA4300039	3070
			Silicon	DAA4300055	3154
		Grey	Neoprene	DAA4300007	2648
			Silicon	DAA4300023	2710
	110 X 75 X 75	Black	Neoprene	DAA4300199	1504
			Silicon	DAA4300205	1548
		Grey	Neoprene	DAA4100882	1354
			Silicon	DAA4300477	1386
	190 X 75 X 55	Black	Neoprene	DAA4300041	1534
			Silicon	DAA4300057	1602
		Grey	Neoprene	DAA4300009	1354
			Silicon	DAA4300025	1410
	190 X 75 X 75	Black	Neoprene	DAA4300197	1768
			Silicon	DAA4300203	1840
		Grey	Neoprene	DAA4100883	1558
			Silicon	DAA4300478	1612
	220 X 120 X 90	Black	Neoprene	DAA4300043	3114
			Silicon	DAA4300059	3208
		Grey	Neoprene	DAA4300011	2734
			Silicon	DAA4300027	2812
	255 X 250 X 120	Black	Neoprene	DAA4300044	6136
			Silicon	DAA4300060	6268
		Grey	Neoprene	DAA4300012	5148
			Silicon	DAA4300033	5256



Manufacturer of vast range of enclosures with designs for industrial and hazardous enclosures



Customised range of Stainless steel and Mild steel enclosures

Stainless steel and Mild steel enclosures

Features:

- Stainless steel's ability to resist corrosion comes from its chemical composition
- Superior working temperature of -20 degree Celsius to 80 degree Celsius
- Excellent dimensional stability and electrical properties
- Provides high resistance to corrosion and ensures performance of equipment

Why wait?

Kindly contact nearest branch for customised requirement

Why wait? Contact us now.

Follow us on:

GRP ENCLOSURES

Model	Size (l x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
GR	260 X 160 X 90	Black	Neoprene	DAA4300045	4322
			Silicon	DAA4300061	4440
		Grey	Neoprene	DAA4300013	3712
			Silicon	DAA4300028	3802
	360 X 160 X 90	Black	Neoprene	DAA4300046	5414
			Silicon	DAA4300062	5560
		Grey	Neoprene	DAA4300014	4648
			Silicon	DAA4300029	4772
	400 X 250 X 120	Black	Neoprene	DAA4300047	8768
			Silicon	DAA4300063	8948
		Grey	Neoprene	DAA4300015	7514
			Silicon	DAA4300030	7670
	400 X 405 X 120	Black	Neoprene	DAA4300048	12178
			Silicon	DAA4300064	12404
		Grey	Neoprene	DAA4300016	10280
			Silicon	DAA4300031	10472
	255 X 250 X 160	Black	Neoprene	DAA4300200	4534
			Silicon	DAA4300206	4662
		Grey	Neoprene	DAA4100884	6348
			Silicon	DAA4300479	6462
	400 X 250 X 161	Black	Neoprene	DAA4300201	10824
			Silicon	DAA4300207	11002
		Grey	Neoprene	DAA4100885	9280
			Silicon	DAA4300480	9438
	406 X 401 X 201	Black	Neoprene	DAA4101095	15176
			Silicon	DAA4300208	15402
		Grey	Neoprene	DAA4100886	12880
			Silicon	DAA4300481	13072
	600 X 250 X 120	Black	Neoprene	DAA4300196	12730
			Silicon	DAA4300209	12974
		Grey	Neoprene	DAA4100887	10892
			Silicon	DAA4300482	11104
	600 X 250 X 161	Black	Neoprene	DAA4300202	14600
			Silicon	DAA4300210	14832
		Grey	Neoprene	DAA4100888	12404
			Silicon	DAA4300483	12616

GRP ENCLOSURES

ATEX – Junction Box



- Fiber Glass, a thermoset polyester material reinforced with fiber glass
- Superior working temperature of -40° C to 150° C
- Flexible provision for Earthing, Din rail and Mounting plate
- IP 66 and IP 67 & IP 68 on request

Technical Data	
Material	Glass reinforced polyester, Graphite added
Flammability	Self Extinguishing, UL 94 V0
Gasket	Silicone
Mechanical Strength	Accordance With EN/IEC 60079-0, Impact energy > 7 Nm
Protection Class	IP 66 to IEC/EN 60529
Standard Color	RAL 9011 / Black
Certified	   

GRP ENCLOSURES

Model	Size (l x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
GR - ATX	80 X 75 X 55	Black	Silicon	DAA4400001	760
	80 X 75 X 75			DAA4400046	870
	110 X 75 X 55			DAA4400002	990
	110 X 75 X 75			DAA4400047	1080
	122 X 120 X 90			DAA4400003	1500
	160 X 75 X 55			DAA4400004	1180
	160 X 75 X 75			DAA4400005	1250
	160 X 160 X 90			DAA4400006	2140
	190 X 75 X 55			DAA4400007	1690
	190 X 75 X 75			DAA4400048	1932
	220 X 120 X 90			DAA4400008	3292
	255 X 250 X 120			DAA4400009	6364
	255 X 250 X 160			DAA4400049	4750
	260 X 160 X 90			DAA4400011	4524
	360 X 160 X 90			DAA4400012	5644
	400 X 250 X 120			DAA4400013	9032
	400 X 250 X 161			DAA4400050	11088
	400 X 405 X 120			DAA4400014	12488
	406 X 401 X 201			DAA4400051	15490
	600 X 250 X 120			DAA4400052	13058
	600 X 250 X 161			DAA4400053	14926

ELECTRICAL SAFETY





Raychem RPG's Electrical Safety Products
ensure that electricity doesn't come to you as a shock !



Kamfet™
Electrical Safety Protection

**Insulating gloves Ideal for
Solar Module Electrical Installation,
Operation & Maintenance**

Its natural latex base offers high dielectric characteristics and its uniform thickness (1.00 mm) ensures excellent dexterity while offering protection up to **1000 Vac & 1500 Vdc**

- Conforms to EN 60903-2003, IEC 60903-2014
- Class-0 | Category- AZC/RC
- Glove Length : 36 cm. | Size : 8 to 12
- Cuff Design : Straight Cuff & Rolled Edge
- Also available in ARC Flash version

Safety fits like a glove; Try one on

Why wait? Contact us now.

Follow us on:

ELECTRICAL SAFETY PRODUCTS

KL Series Electrical Insulating Gloves - Class 00 - Model - KL-A



- Confirms to EN 60903:2003, IEC 60903:2014, and IEC 61482-1-2 standards
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 00, Maximum working voltage: 500 VAC and 750 VDC
- Withstand Voltage: 5 kVAC; Proof Test Voltage: 2.5 kVAC
- Color: Red, Category: AZC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, **Arc Flash - Box Tested**



CE 2777

Arc Flash-Box Tested
IEC-61482-1-2: 2014



Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 00	280mm	7	DEA0010506	1128000-07	3052	1 Pair	DEA0010541	2128000-07	3140	50 Pair
		8	DEA0010003	1128000-08	3052	1 Pair	DEA0010018	2128000-08	3140	50 Pair
		9	DEA0010004	1128000-09	3052	1 Pair	DEA0010019	2128000-09	3140	50 Pair
		10	DEA0010005	1128000-10	3052	1 Pair	DEA0010020	2128000-10	3140	50 Pair
		11	DEA0010006	1128000-11	3052	1 Pair	DEA0010021	2128000-11	3140	50 Pair
		12	DEA0010007	1128000-12	3052	1 Pair	DEA0010022	2128000-12	3140	50 Pair
	360mm	7	DEA0010507	1136000-07	3052	1 Pair	DEA0010542	2136000-07	3140	50 Pair
		8	DEA0010013	1136000-08	3052	1 Pair	DEA0010023	2136000-08	3140	50 Pair
		9	DEA0010014	1136000-09	3052	1 Pair	DEA0010024	2136000-09	3140	50 Pair
		10	DEA0010015	1136000-10	3052	1 Pair	DEA0010025	2136000-10	3140	50 Pair
		11	DEA0010016	1136000-11	3052	1 Pair	DEA0010026	2136000-11	3140	50 Pair
		12	DEA0010017	1136000-12	3052	1 Pair	DEA0010027	2136000-12	3140	50 Pair

ELECTRICAL SAFETY PRODUCTS

KL Series Electrical Insulating Gloves - Class 0 - Model - KL-B



CE 2777

Arc Flash-Box Tested
IEC-61482-1-2: 2014



- Confirms to EN 60903:2003, IEC 60903:2014, and IEC 61482-1-2 standards
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 0, Maximum working voltage: 1000 VAC and 1500 VDC
- Withstand Voltage: 10 kVAC; Proof Test Voltage: 5 kVAC
- Color: Red, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, **Arc Flash - Box Tested**

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 0	280mm	7	DEA0010508	1128010-07	3672	1 Pair	DEA0010543	2128010-07	3730	50 Pair
		8	DEA0010185	1128010-08	3672	1 Pair	DEA0010195	2128010-08	3730	50 Pair
		9	DEA0010186	1128010-09	3672	1 Pair	DEA0010196	2128010-09	3730	50 Pair
		10	DEA0010187	1128010-10	3672	1 Pair	DEA0010197	2128010-10	3730	50 Pair
		11	DEA0010188	1128010-11	3672	1 Pair	DEA0010198	2128010-11	3730	50 Pair
		12	DEA0010189	1128010-12	3672	1 Pair	DEA0010199	2128010-12	3730	50 Pair
	360mm	7	DEA0010509	1136010-07	3672	1 Pair	DEA0010544	2136010-07	3730	50 Pair
		8	DEA0010028	1136010-08	3672	1 Pair	DEA0010008	2136010-08	3730	50 Pair
		9	DEA0010029	1136010-09	3672	1 Pair	DEA0010009	2136010-09	3730	50 Pair
		10	DEA0010030	1136010-10	3672	1 Pair	DEA0010010	2136010-10	3730	50 Pair
		11	DEA0010031	1136010-11	3672	1 Pair	DEA0010011	2136010-11	3730	50 Pair
		12	DEA0010032	1136010-12	3672	1 Pair	DEA0010012	2136010-12	3730	50 Pair
	410mm	7	DEA0010510	1141010-07	3672	1 Pair	DEA0010545	2141010-07	3730	50 Pair
		8	DEA0010033	1141010-08	3672	1 Pair	DEA0010117	2141010-08	3730	50 Pair
		9	DEA0010034	1141010-09	3672	1 Pair	DEA0010118	2141010-09	3730	50 Pair
		10	DEA0010035	1141010-10	3672	1 Pair	DEA0010119	2141010-10	3730	50 Pair
		11	DEA0010036	1141010-11	3672	1 Pair	DEA0010120	2141010-11	3730	50 Pair
		12	DEA0010037	1141010-12	3672	1 Pair	DEA0010121	2141010-12	3730	50 Pair

ELECTRICAL SAFETY PRODUCTS

KL Series Electrical Insulating Gloves - Class 1 - Model - KL-C



- Confirms to EN 60903:2003, IEC 60903:2014, and IEC 61482-1-2 standards
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 1, Maximum working voltage: 7500 VAC and 11250 VDC
- Withstand Voltage: 20 kVAC; Proof Test Voltage: 10 kVAC
- Color: Red, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, **Arc Flash - Box Tested**

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 1	360mm	7	DEA0010511	1136011-07	5372	1 Pair	DEA0010546	2136011-07	5428	50 Pair
		8	DEA0010038	1136011-08	5372	1 Pair	DEA0010043	2136011-08	5428	50 Pair
		9	DEA0010039	1136011-09	5372	1 Pair	DEA0010044	2136011-09	5428	50 Pair
		10	DEA0010040	1136011-10	5372	1 Pair	DEA0010045	2136011-10	5428	50 Pair
		11	DEA0010041	1136011-11	5372	1 Pair	DEA0010046	2136011-11	5428	50 Pair
		12	DEA0010042	1136011-12	5372	1 Pair	DEA0010047	2136011-12	5428	50 Pair
	410mm	7	DEA0010512	1141011-07	5372	1 Pair	DEA0010547	2141011-07	5428	50 Pair
		8	DEA0010048	1141011-08	5372	1 Pair	DEA0010687	2141011-08	5428	50 Pair
		9	DEA0010049	1141011-09	5372	1 Pair	DEA0010054	2141011-09	5428	50 Pair
		10	DEA0010050	1141011-10	5372	1 Pair	DEA0010055	2141011-10	5428	50 Pair
		11	DEA0010051	1141011-11	5372	1 Pair	DEA0010056	2141011-11	5428	50 Pair
		12	DEA0010052	1141011-12	5372	1 Pair	DEA0010057	2141011-12	5428	50 Pair

KL Series Electrical Insulating Gloves - Class 2 - Model - KL-D



- Confirms to EN 60903:2003, IEC 60903:2014, and IEC 61482-1-2 standards
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 2, Maximum working voltage: 17000 VAC and 25500 VDC
- Withstand Voltage: 30 kVAC; Proof Test Voltage: 20 kVAC
- Color: Red, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, **Arc Flash - Box Tested**

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 2	360mm	7	DEA0010513	1136012-07	6552	1 Pair	DEA0010548	2136012-07	6652	50 Pair
		8	DEA0010058	1136012-08	6552	1 Pair	DEA0010063	2136012-08	6652	50 Pair
		9	DEA0010059	1136012-09	6552	1 Pair	DEA0010064	2136012-09	6652	50 Pair
		10	DEA0010060	1136012-10	6552	1 Pair	DEA0010065	2136012-10	6652	50 Pair
		11	DEA0010061	1136012-11	6552	1 Pair	DEA0010066	2136012-11	6652	50 Pair
		12	DEA0010062	1136012-12	6552	1 Pair	DEA0010067	2136012-12	6652	50 Pair
	410mm	7	DEA0010503	1141012-07	6552	1 Pair	DEA0010549	2141012-07	6652	50 Pair
		8	DEA0010068	1141012-08	6552	1 Pair	DEA0010072	2141012-08	6652	50 Pair
		9	DEA0010069	1141012-09	6552	1 Pair	DEA0010073	2141012-09	6652	50 Pair
		10	DEA0010070	1141012-10	6552	1 Pair	DEA0010074	2141012-10	6652	50 Pair
		11	DEA0010071	1141012-11	6552	1 Pair	DEA0010075	2141012-11	6652	50 Pair
		12	DEA0020571	1141012-12	6552	1 Pair	DEA0010076	2141012-12	6652	50 Pair

ELECTRICAL SAFETY PRODUCTS

KL Series Electrical Insulating Gloves - Class 3 - Model - KL-E



- Confirms to EN 60903:2003, IEC 60903:2014, and IEC 61482-1-2 standards
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 3, Maximum working voltage: 26500 VAC and 39750 VDC
- Withstand Voltage: 40 kVAC; Proof Test Voltage: 30 kVAC
- Color: Red, Category: RC, Sizes: 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, **Arc Flash - Box Tested**

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 3	360mm	8	DEA0010077	1136013-08	8812	1 Pair	DEA0010082	2136013-08	8870	50 Pair
		9	DEA0010078	1136013-09	8812	1 Pair	DEA0010083	2136013-09	8870	50 Pair
		10	DEA0010079	1136013-10	8812	1 Pair	DEA0010084	2136013-10	8870	50 Pair
		11	DEA0010080	1136013-11	8812	1 Pair	DEA0010085	2136013-11	8870	50 Pair
		12	DEA0010081	1136013-12	8812	1 Pair	DEA0010086	2136013-12	8870	50 Pair
	410mm	8	DEA0010087	1141013-08	8812	1 Pair	DEA0010092	2136013-08	8870	50 Pair
		9	DEA0010088	1141013-09	8812	1 Pair	DEA0010093	2136013-09	8870	50 Pair
		10	DEA0010089	1141013-10	8812	1 Pair	DEA0010094	2136013-10	8870	50 Pair
		11	DEA0010090	1141013-11	8812	1 Pair	DEA0010095	2136013-11	8870	50 Pair
		12	DEA0010091	1141013-12	8812	1 Pair	DEA0010096	2136013-12	8870	50 Pair

KL Series Electrical Insulating Gloves - Class 4 - Model - KL-F



- Confirms to EN 60903:2003, IEC 60903:2014, and IEC 61482-1-2 standards
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 4, Maximum working voltage: 36000 VAC and 54500 VDC
- Withstand Voltage: 50 kVAC; Proof Test Voltage: 40 kVAC
- Color: Red, Category: RC, Sizes: 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, **Arc Flash - Box Tested**

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 4	410mm	8	DEA0010190	1141014-08	12096	1 Pair	DEA0010102	2141014-08	12284	50 Pair
		9	DEA0010191	1141014-09	12096	1 Pair	DEA0010103	2141014-09	12284	50 Pair
		10	DEA0010192	1141014-10	12096	1 Pair	DEA0010104	2141014-10	12284	50 Pair
		11	DEA0010193	1141014-11	12096	1 Pair	DEA0010105	2141014-11	12284	50 Pair
		12	DEA0010194	1141014-12	12096	1 Pair	DEA0010106	2141014-12	12284	50 Pair

Note : For mechanical protection from cut and abrasion, rubber gloves must be used along with leather Over gloves.

ELECTRICAL SAFETY PRODUCTS

KL-ARC Series Electrical Insulating Gloves with ARC Flash Protection - Class 00 - Model - KL-A-ARC



- Confirms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **8 Cal/cm2**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 00, Maximum working voltage: 500 VAC and 750 VDC
- Withstand Voltage: 10 kVAC; Proof Test Voltage: 2.5 kVAC
- Color: Red, Category: AZC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 00	280mm	7	DEA0010516	1228000-07	4364	1 Pair	DEA0010553	2228000-07	4450	50 Pair
		8	DEA0010436	1228000-08	4364	1 Pair	DEA0010455	2228000-08	4450	50 Pair
		9	DEA0010353	1228000-09	4364	1 Pair	DEA0010356	2228000-09	4450	50 Pair
		10	DEA0010416	1228000-10	4364	1 Pair	DEA0010387	2228000-10	4450	50 Pair
		11	DEA0010371	1228000-11	4364	1 Pair	DEA0010430	2228000-11	4450	50 Pair
		12	DEA0010395	1228000-12	4364	1 Pair	DEA0010380	2228000-12	4450	50 Pair
	360mm	7	DEA0010517	1236000-07	4364	1 Pair	DEA0010554	2236000-07	4450	50 Pair
		8	DEA0010365	1236000-08	4364	1 Pair	DEA0010460	2236000-08	4450	50 Pair
		9	DEA0010438	1236000-09	4364	1 Pair	DEA0010375	2236000-09	4450	50 Pair
		10	DEA0010495	1236000-10	4364	1 Pair	DEA0010441	2236000-10	4450	50 Pair
		11	DEA0010440	1236000-11	4364	1 Pair	DEA0010355	2236000-11	4450	50 Pair
		12	DEA0010373	1236000-12	4364	1 Pair	DEA0010449	2236000-12	4450	50 Pair

ELECTRICAL SAFETY PRODUCTS

KL-ARC Series Electrical Insulating Gloves with ARC Flash Protection - Class 0 - Model - KL-B-ARC



- Confirms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **14 Cal/cm²**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 0, Maximum working voltage: 1000 VAC and 1500 VDC
- Withstand Voltage: 10 kVAC; Proof Test Voltage: 5 kVAC
- Color: Red, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 0	280mm	7	DEA0010518	1228010-07	5156	1 Pair	DEA0010555	2228010-07	5300	50 Pair
		8	DEA0010362	1228010-08	5156	1 Pair	DEA0010360	2228010-08	5300	50 Pair
		9	DEA0010408	1228010-09	5156	1 Pair	DEA0010374	2228010-09	5300	50 Pair
		10	DEA0010369	1228010-10	5156	1 Pair	DEA0010370	2228010-10	5300	50 Pair
		11	DEA0010404	1228010-11	5156	1 Pair	DEA0010491	2228010-11	5300	50 Pair
		12	DEA0010314	1228010-12	5156	1 Pair	DEA0010424	2228010-12	5300	50 Pair
	360mm	7	DEA0010519	1236010-07	5156	1 Pair	DEA0010556	2236010-07	5300	50 Pair
		8	DEA0010394	1236010-08	5156	1 Pair	DEA0010450	2236010-08	5300	50 Pair
		9	DEA0010432	1236010-09	5156	1 Pair	DEA0010446	2236010-09	5300	50 Pair
		10	DEA0010350	1236010-10	5156	1 Pair	DEA0010433	2236010-10	5300	50 Pair
		11	DEA0010407	1236010-11	5156	1 Pair	DEA0010378	2236010-11	5300	50 Pair
		12	DEA0010402	1236010-12	5156	1 Pair	DEA0010447	2236010-12	5300	50 Pair
	410mm	7	DEA0010520	1241010-07	5156	1 Pair	DEA0010557	2241010-07	5300	50 Pair
		8	DEA0010451	1241010-08	5156	1 Pair	DEA0010498	2241010-08	5300	50 Pair
		9	DEA0010465	1241010-09	5156	1 Pair	DEA0010499	2241010-09	5300	50 Pair
		10	DEA0010467	1241010-10	5156	1 Pair	DEA0010500	2241010-10	5300	50 Pair
		11	DEA0010396	1241010-11	5156	1 Pair	DEA0010501	2241010-11	5300	50 Pair
		12	DEA0010461	1241010-12	5156	1 Pair	DEA0010502	2241010-12	5300	50 Pair

ELECTRICAL SAFETY PRODUCTS

KL-ARC Series Electrical Insulating Gloves with ARC Flash Protection - Class 1 - Model - KL-C-ARC



- Confirms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **14 Cal/cm2**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 1, Maximum working voltage: 7500 VAC and 11250 VDC
- Withstand Voltage: 20 kVAC; Proof Test Voltage: 10 kVAC
- Color: Red, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 1	360mm	7	DEA0010521	1236011-07	7604	1 Pair	DEA0010558	2236011-07	7762	50 Pair
		8	DEA0010391	1236011-08	7604	1 Pair	DEA0010471	2236011-08	7762	50 Pair
		9	DEA0010462	1236011-09	7604	1 Pair	DEA0010456	2236011-09	7762	50 Pair
		10	DEA0010459	1236011-10	7604	1 Pair	DEA0010418	2236011-10	7762	50 Pair
		11	DEA0010401	1236011-11	7604	1 Pair	DEA0010457	2236011-11	7762	50 Pair
		12	DEA0010410	1236011-12	7604	1 Pair	DEA0010349	2236011-12	7762	50 Pair
	410mm	7	DEA0010522	1241011-07	7604	1 Pair	DEA0010559	2241011-07	7762	50 Pair
		8	DEA0010389	1241011-08	7604	1 Pair	DEA0010383	2241011-08	7762	50 Pair
		9	DEA0010458	1241011-09	7604	1 Pair	DEA0010415	2241011-09	7762	50 Pair
		10	DEA0010493	1241011-10	7604	1 Pair	DEA0010398	2241011-10	7762	50 Pair
		11	DEA0010381	1241011-11	7604	1 Pair	DEA0010463	2241011-11	7762	50 Pair
		12	DEA0010443	1241011-12	7604	1 Pair	DEA0010439	2241011-12	7762	50 Pair

ELECTRICAL SAFETY PRODUCTS

KL-ARC Series Electrical Insulating Gloves with ARC Flash Protection - Class 2 - Model - KL-D-ARC



- Confirms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **16 Cal/cm2**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 2, Maximum working voltage: 17000 VAC and 25500 VDC
- Withstand Voltage: 30 kVAC; Proof Test Voltage: 20 kVAC
- Color: Red, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 2	360mm	7	DEA0010523	1236012-07	9274	1 Pair	DEA0010560	2236012-07	9476	50 Pair
		8	DEA0010453	1236012-08	9274	1 Pair	DEA0010400	2236012-08	9476	50 Pair
		9	DEA0010448	1236012-09	9274	1 Pair	DEA0010363	2236012-09	9476	50 Pair
		10	DEA0010392	1236012-10	9274	1 Pair	DEA0010468	2236012-10	9476	50 Pair
		11	DEA0010429	1236012-11	9274	1 Pair	DEA0010399	2236012-11	9476	50 Pair
		12	DEA0010357	1236012-12	9274	1 Pair	DEA0010359	2236012-12	9476	50 Pair
	410mm	7	DEA0010524	1241012-07	9274	1 Pair	DEA0010561	2241012-07	9476	50 Pair
		8	DEA0010475	1241012-08	9274	1 Pair	DEA0010386	2241012-08	9476	50 Pair
		9	DEA0010412	1241012-09	9274	1 Pair	DEA0010385	2241012-09	9476	50 Pair
		10	DEA0010406	1241012-10	9274	1 Pair	DEA0010388	2241012-10	9476	50 Pair
		11	DEA0010409	1241012-11	9274	1 Pair	DEA0010367	2241012-11	9476	50 Pair
		12	DEA0010477	1241012-12	9274	1 Pair	DEA0010423	2241012-12	9476	50 Pair

ELECTRICAL SAFETY PRODUCTS

KL-ARC Series Electrical Insulating Gloves with ARC Flash Protection - Class 3 - Model - KL-E-ARC



- Confirms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **25 Cal/cm2**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 3, Maximum working voltage: 26500 VAC and 39750 VDC
- Withstand Voltage: 40 kVAC; Proof Test Voltage: 30 kVAC
- Color: Red, Category: RC, Sizes: 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 3	360mm	8	DEA0010473	1236013-08	12484	1 Pair	DEA0010445	2236013-08	12788	50 Pair
		9	DEA0010494	1236013-09	12484	1 Pair	DEA0010426	2236013-09	12788	50 Pair
		10	DEA0010437	1236013-10	12484	1 Pair	DEA0010361	2236013-10	12788	50 Pair
		11	DEA0010366	1236013-11	12484	1 Pair	DEA0010478	2236013-11	12788	50 Pair
		12	DEA0010476	1236013-12	12484	1 Pair	DEA0010466	2236013-12	12788	50 Pair
	410mm	8	DEA0010492	1241013-08	12484	1 Pair	DEA0010384	2241013-08	12788	50 Pair
		9	DEA0010435	1241013-09	12484	1 Pair	DEA0010425	2241013-09	12788	50 Pair
		10	DEA0010377	1241013-10	12484	1 Pair	DEA0010382	2241013-10	12788	50 Pair
		11	DEA0010390	1241013-11	12484	1 Pair	DEA0010368	2241013-11	12788	50 Pair
		12	DEA0010414	1241013-12	12484	1 Pair	DEA0010354	2241013-12	12788	50 Pair

ELECTRICAL SAFETY PRODUCTS

KL-ARC Series Electrical Insulating Gloves with ARC Flash Protection - Class 4 - Model - KL-F-ARC



- Confirms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **39 Cal/cm2**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 4, Maximum working voltage: 36000 VAC and 54500 VDC
- Withstand Voltage: 50 kVAC; Proof Test Voltage: 40 kVAC
- Color: Red, Category: RC, Sizes: 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 4	410mm	8	DEA0010397	1241014-08	16776	1 Pair	DEA0010417	2241014-08	17108	50 Pair
		9	DEA0010352	1241014-09	16776	1 Pair	DEA0010442	2241014-09	17108	50 Pair
		10	DEA0010351	1241014-10	16776	1 Pair	DEA0010376	2241014-10	17108	50 Pair
		11	DEA0010470	1241014-11	16776	1 Pair	DEA0010421	2241014-11	17108	50 Pair
		12	DEA0010372	1241014-12	16776	1 Pair	DEA0010393	2241014-12	17108	50 Pair

Note : For mechanical protection from cut and abrasion, rubber gloves must be used along with leather over gloves.

ELECTRICAL SAFETY PRODUCTS

KC-Composite Series Electrical Insulating Gloves with ARC Flash & Mechanical Protection - Class 00 - Model - KC-A



- Confirms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **14 Cal/cm2**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 00, Maximum working voltage: 500 VAC and 750 VDC
- Withstand Voltage: 5kVAC; Proof Test Voltage: 2,5 kVAC
- **Bi-Color - Red Inside & Black Outside**, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff			
			PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 00	280mm	7	DEA0010528	1328000-07	6394	1 Pair
		8	DEA0010220	1328000-08	6394	1 Pair
		9	DEA0010222	1328000-09	6394	1 Pair
		10	DEA0010224	1328000-10	6394	1 Pair
		11	DEA0010226	1328000-11	6394	1 Pair
		12	DEA0010228	1328000-12	6394	1 Pair
	360mm	7	DEA0010529	1336000-07	6394	1 Pair
		8	DEA0010221	1336000-08	6394	1 Pair
		9	DEA0010223	1336000-09	6394	1 Pair
		10	DEA0010225	1336000-10	6394	1 Pair
		11	DEA0010227	1336000-11	6394	1 Pair
		12	DEA0010229	1336000-12	6394	1 Pair

ELECTRICAL SAFETY PRODUCTS

KC-Composite Series Electrical Insulating Gloves with ARC Flash & Mechanical Protection - Class 0 - Model - KC-B



- Confirms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **25 Cal/cm2**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 0, Maximum working voltage: 1000 VAC and 1500 VDC
- Withstand Voltage: 10 kVAC; Proof Test Voltage: 5 kVAC
- **Bi-Color - Red Inside & Black Outside**, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff			
			PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 0	280mm	7	DEA0010530	1328010-07	8006	1 Pair
		8	DEA0010245	1328010-08	8006	1 Pair
		9	DEA0010247	1328010-09	8006	1 Pair
		10	DEA0010249	1328010-10	8006	1 Pair
		11	DEA0010251	1328010-11	8006	1 Pair
		12	DEA0010253	1328010-12	8006	1 Pair
	360mm	7	DEA0010531	1336010-07	8006	1 Pair
		8	DEA0010203	1336010-08	8006	1 Pair
		9	DEA0010204	1336010-09	8006	1 Pair
		10	DEA0010205	1336010-10	8006	1 Pair
		11	DEA0010206	1336010-11	8006	1 Pair
		12	DEA0010207	1336010-12	8006	1 Pair
	410mm	7	DEA0010532	1341010-07	8006	1 Pair
		8	DEA0010246	1341010-08	8006	1 Pair
		9	DEA0010248	1341010-09	8006	1 Pair
		10	DEA0010250	1341010-10	8006	1 Pair
		11	DEA0010252	1341010-11	8006	1 Pair
		12	DEA0010254	1341010-12	8006	1 Pair

ELECTRICAL SAFETY PRODUCTS

KC-Composite Series Electrical Insulating Gloves with ARC Flash & Mechanical Protection - Class 1- Model - KC-C



- Confirms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **45 Cal/cm2**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 1, Maximum working voltage: 7500 VAC and 11250 VDC
- Withstand Voltage: 20 kVAC; Proof Test Voltage: 10 kVAC
- **Bi-Color - Red Inside & Black Outside**, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff			
			PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 1	360mm	7	DEA0010533	1336011-07	9476	1 Pair
		8	DEA0010255	1336011-08	9476	1 Pair
		9	DEA0010257	1336011-09	9476	1 Pair
		10	DEA0010259	1336011-10	9476	1 Pair
		11	DEA0010261	1336011-11	9476	1 Pair
		12	DEA0010263	1336011-12	9476	1 Pair
	410mm	7	DEA0010534	1341011-07	9476	1 Pair
		8	DEA0010256	1341011-08	9476	1 Pair
		9	DEA0010258	1341011-09	9476	1 Pair
		10	DEA0010260	1341011-10	9476	1 Pair
		11	DEA0010262	1341011-11	9476	1 Pair
		12	DEA0010264	1341011-12	9476	1 Pair

ELECTRICAL SAFETY PRODUCTS

KC-Composite Series Electrical Insulating Gloves with ARC Flash & Mechanical Protection - Class 2- Model - KC-D



- Confirms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **55 Cal/cm2**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 2, Maximum working voltage: 17000 VAC and 25500 VDC
- Withstand Voltage: 30 kVAC; Proof Test Voltage: 30 kVAC
- **Bi-Color - Red Inside & Black Outside**, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff			
			PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 2	360mm	7	DEA0010535	1336012-07	12716	1 Pair
		8	DEA0010208	1336012-08	12716	1 Pair
		9	DEA0010210	1336012-09	12716	1 Pair
		10	DEA0010212	1336012-10	12716	1 Pair
		11	DEA0010214	1336012-11	12716	1 Pair
		12	DEA0010216	1336012-12	12716	1 Pair
	410mm	7	DEA0010536	1341012-07	12716	1 Pair
		8	DEA0010209	1341012-08	12716	1 Pair
		9	DEA0010211	1341012-09	12716	1 Pair
		10	DEA0010213	1341012-10	12716	1 Pair
		11	DEA0010215	1341012-11	12716	1 Pair
		12	DEA0010217	1341012-12	12716	1 Pair

ELECTRICAL SAFETY PRODUCTS

KC-Composite Series Electrical Insulating Gloves with ARC Flash & Mechanical Protection - Class 3 - Model - KC-E



- Confirms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **35 Cal/cm2**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 3, Maximum working voltage: 26500 VAC and 39750 VDC
- Withstand Voltage: 40 kVAC; Proof Test Voltage: 30 kVAC
- **Bi-Color - Red Inside & Black Outside**, Category: RC, Sizes: 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff			
			PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 3	360mm	8	DEA0010269	1336013-08	15552	1 Pair
		9	DEA0010271	1336013-09	15552	1 Pair
		10	DEA0010273	1336013-10	15552	1 Pair
		11	DEA0010275	1336013-11	15552	1 Pair
		12	DEA0010277	1336013-12	15552	1 Pair
	410mm	8	DEA0010270	1341013-08	15552	1 Pair
		9	DEA0010272	1341013-09	15552	1 Pair
		10	DEA0010274	1341013-10	15552	1 Pair
		11	DEA0010276	1341013-11	15552	1 Pair
		12	DEA0010278	1341013-12	15552	1 Pair

ELECTRICAL SAFETY PRODUCTS

KC-Composite Series Electrical Insulating Gloves with ARC Flash & Mechanical Protection Class 4 - Model - KC-F



- Confirms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **25 Cal/cm2**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 4, Maximum working voltage: 36000 VAC and 54500 VDC
- Withstand Voltage: 50 kVAC; Proof Test Voltage: 40 kVAC
- **Bi-Color - Red Inside & Black Outside**, Category: RC, Sizes: 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff			
			PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 4	410mm	8	DEA0010279	1341014-08	21312	1 Pair
		9	DEA0010280	1341014-09	21312	1 Pair
		10	DEA0010281	1341014-10	21312	1 Pair
		11	DEA0010282	1341014-11	21312	1 Pair
		12	DEA0010283	1341014-12	21312	1 Pair

ELECTRICAL SAFETY PRODUCTS

Leather Protector - Over Gloves for Electrical Insulating Gloves



- CE Category: II Intermediary risks, Conforms to EN388, EN ISO 21420
- Leather over Glove Water-repellent and silicone treatment Gunn cut, thumb in one piece, gaunt less Velcro adjustment strap on the back 150 mm split leather cuff sewed outside
- The Velcro fastening tab provides the glove with good support
- Silicone grain leather ensures good flexibility, water repellence as well as good
- Protects Electrical gloves against risks of cuts and tearing.

Classification	Length	Size	PCN	Product Code	List Price (INR) Per Pair	MOQ
Suitable for Class 00 & 0 - Electrical Gloves	315mm	8	DEA0010130	9931000-08	2566	1 Pair
		9	DEA0010131	9931000-09	2566	1 Pair
		10	DEA0010132	9931000-10	2566	1 Pair
		11	DEA0010133	9931000-11	2566	1 Pair
		12	DEA0010134	9931000-12	2566	1 Pair
Suitable for Class 1 & 2 - Electrical Gloves		8	DEA0010145	9931012-08	2610	1 Pair
		9	DEA0010146	9931012-09	2610	1 Pair
		10	DEA0010147	9931012-10	2610	1 Pair
		11	DEA0010148	9931012-11	2610	1 Pair
		12	DEA0010149	9931012-12	2610	1 Pair
Suitable for Class 3 & 4 - Electrical Gloves		8	DEA0010165	9931034-08	2700	1 Pair
		9	DEA0010166	9931034-09	2700	1 Pair
		10	DEA0010167	9931034-10	2700	1 Pair
		11	DEA0010168	9931034-11	2700	1 Pair
		12	DEA0010169	9931034-12	2700	1 Pair



Kamfet - Inner Gloves for Electrical insulating Gloves

- Made up of knitted gloves/Hosiery
- Provides additional comfort from perspiration
- Available in universal size

Applications:

- Inner glove absorbs perspiration and provides comfort
- For cold regions, it helps in keeping the hands warm

PCN	Product Code	Description	List Price (INR) Per Pair
EBASGG1001	ESU	Inner Cotton Glove Free Size	320

ELECTRICAL SAFETY PRODUCTS

Accessories for Insulating Mat / Blanket Storage Bag for Outdoor Application:

Customised for secure transporting and safeguarding insulating mats/Blankets during outdoor tasks. Enhanced with a comfortable shoulder strap for effortless carrying and added convenience.

Benefits

- Transparent pocket for user instruction and storage identification
- Hand carrying straps and shoulder carrying strap



PCN	Product Code	Use	←→ m		List Price (INR) Per No.
			Dimensions	Weight	
DEA0021642	ESCB1	CARRYING BAG-700X110-FOR 600MM WIDE MAT / BLANKET	1.1 Meter	0.5 Kg	1600
DEA0020332	ESCB2	CARRYING BAG-1100X110-FOR 1000MM WIDE MAT / BLANKET	1.1 Meter	0.6 Kg	2500

Kamfet - Storage Bag for Electrical Insulating Gloves



Our specialized storage bag for electrical insulating gloves combines safety, durability, and convenience, making it an essential accessory for professionals.

- Heavy-duty, water-resistant nylon or PVC-coated polyester ensures both durability and electrical insulation
- Internal padding and reinforced sections protect gloves from physical damage and wear
- Heavy-duty zippers with an optional lock keep the bag securely closed

PCN	Product Code	Description	List Price (INR) Per No,
DEA0010961	ESGB1	GLOVE BAG-370MM-FOR 360MM LENGTH GLOVE	1300
DEA0010749	ESGB2	GLOVE BAG-420MM-FOR 410MM LENGTH GLOVE	2000

ELECTRICAL SAFETY PRODUCTS

Electrical Insulating Matting Fabric Mat Finish - IEC61111 - Dark Grey Color

Electrical Insulating Rubber Matting, also known as electrical safety mats or switchboard matting, is a rubber mat designed to provide electrical insulation and protect workers from electric shocks in areas where electrical equipment is operated. These mats are commonly used in industrial, commercial, and utility environments with a risk of electrical hazards.

Kamfet - Electrical Insulating Rubber Matting: Unmatched Safety, Unrivalled Quality

Introducing **Kamfet** Range of Electrical Insulating Rubber Matting, your ultimate solution for ensuring unparalleled safety in electrical environments. Also known as dielectric or electrical safety matting, our mats are meticulously designed to protect individuals against electrical shock from equipment in switch rooms, in front of switchboards, transformers, and in various high or low-voltage workplaces.



- Fully tested to specification IEC 61111:2009
- High electrical resistance from 50 volts to 50,000 volts
- Suitable for both AC and DC applications
- Provides enhanced safety for operators against electrical shock
- Features an anti-slip surface finish, conforming to slip-resistant test
- Resistant to acid, oil, and low temperatures, ensuring durability
- Permanent marking-durable and un-erasable for clear identification
- Supplied with full traceability for quality assurance
- Requires minimal maintenance, ensuring long-lasting usability
- Constructed with highly durable and quality rubber compound
- Designed with highly flexible mats featuring a self-gripping design
- Anti-fatigue type, providing comfort during prolonged standing
- Operating temperature range: -40°C to +55°C, suitable for various environments
- Repetitive marking, with three markings every 1 meter
- Halogen-free, RoHS2, and REACH compliant, meeting environmental standards
- Color - Dark Grey - Mat Fabric Finish

Class 0 Maximum Working Voltage 1000 VAC and 1500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021451	ES0FIG-0.6X1-G	2.2 mm	0.6 Meter	1 Meter	2.02 kg	1928	25 Roll
DEA0021453	ES0FIG-0.6X2-G			2 Meter	4.04 kg	3856	25 Roll
DEA0021455	ES0FIG-0.6X5-G			5 Meter	10.1 kg	9626	25 Roll
DEA0021458	ES0FIG-0.6X10-G			10 Meter	20.2 kg	19252	25 Roll
DEA0021459	ES0FIG-1X1-G		1.0 Meter	1 Meter	3.37 kg	3204	1 Roll
DEA0021460	ES0FIG-1X2-G			2 Meter	6.73 kg	6422	1 Roll
DEA0021463	ES0FIG-1X5-G			5 Meter	16.83 kg	16048	1 Roll
DEA0021464	ES0FIG-1X10-G			10 Meter	33.66 kg	32082	1 Roll
DEA0021466	ES0FIG-1.2X1-G		1.2 Meter	1 Meter	4.04 kg	3886	25 Roll
DEA0021467	ES0FIG-1.2X2-G			2 Meter	8.08 kg	7758	25 Roll
DEA0021468	ES0FIG-1.2X5-G			5 Meter	20.2 kg	19400	25 Roll
DEA0021469	ES0FIG-1.2X10-G			10 Meter	40.39 kg	38800	25 Roll

ELECTRICAL SAFETY PRODUCTS

Class 1 Maximum Working Voltage 7500 VAC and 11250 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021470	ES1FIG-0.6X1-G	2.2 mm	0.6 Meter	1 Meter	2.02 kg	1928	25 Roll
DEA0021472	ES1FIG-0.6X2-G			2 Meter	4.04 kg	3856	25 Roll
DEA0021474	ES1FIG-0.6X5-G			5 Meter	10.1 kg	9626	25 Roll
DEA0021476	ES1FIG-0.6X10-G			10 Meter	20.2 kg	19252	25 Roll
DEA0021477	ES1FIG-1X1-G		1.0 Meter	1 Meter	3.37 kg	3204	1 Roll
DEA0021478	ES1FIG-1X2-G			2 Meter	6.73 kg	6422	1 Roll
DEA0021479	ES1FIG-1X5-G			5 Meter	16.83 kg	16048	1 Roll
DEA0021481	ES1FIG-1X10-G			10 Meter	33.66 kg	32082	1 Roll
DEA0021482	ES1FIG-1.2X1-G		1.2 Meter	1 Meter	4.04 kg	3886	25 Roll
DEA0021483	ES1FIG-1.2X2-G			2 Meter	8.08 kg	7758	25 Roll
DEA0021484	ES1FIG-1.2X5-G			5 Meter	20.2 kg	19400	25 Roll
DEA0021485	ES1FIG-1.2X10-G			10 Meter	40.39 kg	38800	25 Roll

Class 2 Maximum Working Voltage 17000 VAC and 25500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021486	ES2FIG-0.6X1-G	2.6 mm	0.6 Meter	1 Meter	2.39 kg	2298	25 Roll
DEA0021487	ES2FIG-0.6X2-G			2 Meter	4.77 kg	4584	25 Roll
DEA0021488	ES2FIG-0.6X5-G			5 Meter	11.93 kg	11466	25 Roll
DEA0021489	ES2FIG-0.6X10-G			10 Meter	23.87 kg	22916	25 Roll
DEA0021490	ES2FIG-1X1-G		1.0 Meter	1 Meter	3.98 kg	3826	1 Roll
DEA0021491	ES2FIG-1X2-G			2 Meter	7.96 kg	7638	1 Roll
DEA0021492	ES2FIG-1X5-G			5 Meter	19.89 kg	19104	1 Roll
DEA0021493	ES2FIG-1X10-G			10 Meter	39.78 kg	38192	1 Roll
DEA0021494	ES2FIG-1.2X1-G		1.2 Meter	1 Meter	4.77 kg	4584	25 Roll
DEA0021495	ES2FIG-1.2X2-G			2 Meter	9.55 kg	9166	25 Roll
DEA0021496	ES2FIG-1.2X5-G			5 Meter	23.87 kg	22916	25 Roll
DEA0021497	ES2FIG-1.2X10-G			10 Meter	47.74 kg	45830	25 Roll

Class 3 Maximum Working Voltage 26500 VAC and 39750 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021498	ES3FIG-0.6X1-G	3.2 mm	0.6 Meter	1 Meter	2.94 kg	2818	25 Roll
DEA0021499	ES3FIG-0.6X2-G			2 Meter	5.88 kg	5622	25 Roll
DEA0021500	ES3FIG-0.6X5-G			5 Meter	14.69 kg	14060	25 Roll
DEA0021501	ES3FIG-0.6X10-G			10 Meter	29.38 kg	28106	25 Roll
DEA0021502	ES3FIG-1X1-G		1.0 Meter	1 Meter	4.9 kg	4672	1 Roll
DEA0021503	ES3FIG-1X2-G			2 Meter	9.79 kg	9344	1 Roll
DEA0021505	ES3FIG-1X5-G			5 Meter	24.48 kg	23376	1 Roll
DEA0021507	ES3FIG-1X10-G			10 Meter	48.96 kg	46750	1 Roll
DEA0021509	ES3FIG-1.2X1-G		1.2 Meter	1 Meter	5.88 kg	5622	25 Roll
DEA0021512	ES3FIG-1.2X2-G			2 Meter	11.75 kg	11242	25 Roll
DEA0021514	ES3FIG-1.2X5-G			5 Meter	29.38 kg	28106	25 Roll
DEA0021515	ES3FIG-1.2X10-G			10 Meter	58.75 kg	56214	25 Roll

Class 4 Maximum Working Voltage 36000 VAC and 54000 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021516	ES4FIG-0.6X1-G	5.2 mm	0.6 Meter	1 Meter	4.77 kg	4584	25 Roll
DEA0021517	ES4FIG-0.6X2-G			2 Meter	9.55 kg	9166	25 Roll
DEA0021519	ES4FIG-0.6X5-G			5 Meter	23.87 kg	22916	25 Roll
DEA0021520	ES4FIG-0.6X10-G			10 Meter	47.74 kg	45830	25 Roll
DEA0021521	ES4FIG-1X1-G		1.0 Meter	1 Meter	7.96 kg	7608	1 Roll
DEA0021524	ES4FIG-1X2-G			2 Meter	15.91 kg	15218	1 Roll
DEA0021526	ES4FIG-1X5-G			5 Meter	39.78 kg	38044	1 Roll
DEA0021527	ES4FIG-1X10-G			10 Meter	79.56 kg	76074	1 Roll
DEA0021528	ES4FIG-1.2X1-G		1.2 Meter	1 Meter	9.55 kg	9136	25 Roll
DEA0021529	ES4FIG-1.2X2-G			2 Meter	19.09 kg	18274	25 Roll
DEA0021530	ES4FIG-1.2X5-G			5 Meter	47.74 kg	45682	25 Roll
DEA0021531	ES4FIG-1.2X10-G			10 Meter	95.47 kg	91350	25 Roll

ELECTRICAL SAFETY PRODUCTS

Electrical Insulating Matting Fabric Finish - IEC61111 - Dual Color - Black / Orange


The insulating mats offer both individual and collective protection to operators. Crafted from high-quality elastomeric materials, these mats are specifically designed to cover the ground, ensuring the electrical safety of workers during repairs to electrical installations. By providing a reliable insulating barrier, these mats play a vital role in safeguarding operators from the risk of electric shocks, making them an indispensable safety measure in various industrial and commercial settings.

Kamfet Matting - Empowered by Dual-Color Technology

Incorporating **Dual-Color technology**, our insulating mats are meticulously engineered to elevate safety standards. This innovative design enables effortless **damage detection** to the top layer, facilitating prompt assessment and mat replacement decisions.

Kamfet insulation matting consistently showcases exceptional dielectric strength, rigorously tested in accordance with the stringent IEC 61111:2009 standards. Our unwavering commitment to quality ensures that our mats deliver reliable electrical insulation, meeting the highest industry benchmarks for safety and performance.

The **two colors** of the mat serve the purpose of mechanical damage indication and provide a visual cue to replace the mat when the color change becomes visible on the surface. This innovative feature helps users quickly identify wear and tear, ensuring timely replacement for optimal performance and safety.

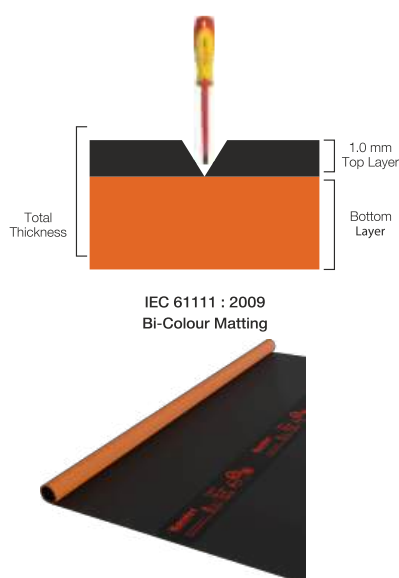

- Fully tested to specification IEC 61111:2009
- Dual-Color (Life Indicator) Technology:** Black on top and Orange on bottom
- High electrical resistance from 50 volts to 50,000 volts
- Suitable for both AC and DC applications
- Provides enhanced safety for operators against electrical shock
- Features an anti-slip surface finish, conforming to slip-resistant test
- Resistant to acid, oil, and low temperatures, ensuring durability
- Permanent marking-durable and un-erasable for clear identification
- Supplied with full traceability for quality assurance
- Requires minimal maintenance, ensuring long-lasting usability
- Constructed with highly durable and quality rubber compound
- Designed with highly flexible mats featuring a self-gripping design
- Anti-fatigue type, providing comfort during prolonged standing
- Operating temperature range: -40°C to +55°C, suitable for various environments
- Repetitive marking, with three markings every 1 meter
- Halogen-free, RoHS2, and REACH compliant, meeting environmental standards

Class 0 Maximum Working Voltage 1000 VAC and 1500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021339	ES0FIB0-1X1-M	2.2 mm	1.0 Meter	1 Meter	3.3 kg	4658	1 Roll
DEA0021340	ES0FIB0-1X2-M			2 Meter	6.6 kg	9300	1 Roll
DEA0021341	ES0FIB0-1X5-M			5 Meter	16.5 kg	23256	1 Roll
DEA0021342	ES0FIB0-1X10-M			10 Meter	33 kg	46498	1 Roll
DEA0021343	ES0FIB0-1.2X1-M		1.2 Meter	1 Meter	3.96 kg	5576	25 Roll
DEA0021344	ES0FIB0-1.2X2-M			2 Meter	7.92 kg	11168	25 Roll
DEA0021345	ES0FIB0-1.2X5-M			5 Meter	19.8 kg	27898	25 Roll
DEA0021346	ES0FIB0-1.2X10-M			10 Meter	39.6 kg	55812	25 Roll

ELECTRICAL SAFETY PRODUCTS

Class 1 Maximum Working Voltage 7500 VAC and 11250 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021347	ES1FIBO-1X1-M	2.2 mm	1.0 Meter	1 Meter	3.3 kg	4658	1 Roll
DEA0021348	ES1FIBO-1X2-M			2 Meter	6.6 kg	9314	1 Roll
DEA0021349	ES1FIBO-1X5-M			5 Meter	16.5 kg	23256	1 Roll
DEA0021350	ES1FIBO-1X10-M			10 Meter	33 kg	46498	1 Roll
DEA0021351	ES1FIBO-1.2X1-M		1.2 Meter	1 Meter	3.96 kg	6986	25 Roll
DEA0021352	ES1FIBO-1.2X2-M			2 Meter	7.92 kg	13972	25 Roll
DEA0021353	ES1FIBO-1.2X5-M			5 Meter	19.8 kg	34944	25 Roll
DEA0021354	ES1FIBO-1.2X10-M			10 Meter	39.6 kg	69888	25 Roll

Class 2 Maximum Working Voltage 17000 VAC and 25500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021355	ES2FIBO-1X1-M	2.6 mm	1.0 Meter	1 Meter	3.9 kg	5828	1 Roll
DEA0021356	ES2FIBO-1X2-M			2 Meter	7.8 kg	11644	1 Roll
DEA0021357	ES2FIBO-1X5-M			5 Meter	19.5 kg	29130	1 Roll
DEA0021358	ES2FIBO-1X10-M			10 Meter	39 kg	58246	1 Roll
DEA0021359	ES2FIBO-1.2X1-M		1.2 Meter	1 Meter	4.68 kg	6986	25 Roll
DEA0021360	ES2FIBO-1.2X2-M			2 Meter	9.36 kg	13972	25 Roll
DEA0021361	ES2FIBO-1.2X5-M			5 Meter	23.4 kg	34944	25 Roll
DEA0021362	ES2FIBO-1.2X10-M			10 Meter	46.8 kg	69888	25 Roll

Class 3 Maximum Working Voltage 26500 VAC and 39750 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021363	ES3FIBO-1X1-M	3.2 mm	1.0 Meter	1 Meter	4.8 kg	6644	1 Roll
DEA0021364	ES3FIBO-1X2-M			2 Meter	9.6 kg	13304	1 Roll
DEA0021365	ES3FIBO-1X5-M			5 Meter	24 kg	33238	1 Roll
DEA0021366	ES3FIBO-1X10-M			10 Meter	48 kg	66478	1 Roll
DEA0021367	ES3FIBO-1.2X1-M		1.2 Meter	1 Meter	5.76 kg	7980	25 Roll
DEA0021368	ES3FIBO-1.2X2-M			2 Meter	11.52 kg	15960	25 Roll
DEA0021369	ES3FIBO-1.2X5-M			5 Meter	28.8 kg	39884	25 Roll
DEA0021370	ES3FIBO-1.2X10-M			10 Meter	57.6 kg	79766	25 Roll

Class 4 Maximum Working Voltage 36000 VAC and 54000 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021371	ES4FIBO-1X1-M	5.2 mm	1.0 Meter	1 Meter	7.8 kg	11302	1 Roll
DEA0021372	ES4FIBO-1X2-M			2 Meter	15.6 kg	22618	1 Roll
DEA0021373	ES4FIBO-1X5-M			5 Meter	39 kg	56554	1 Roll
DEA0021374	ES4FIBO-1X10-M			10 Meter	78 kg	113108	1 Roll
DEA0021375	ES4FIBO-1.2X1-M		1.2 Meter	1 Meter	9.36 kg	13572	25 Roll
DEA0021376	ES4FIBO-1.2X2-M			2 Meter	18.72 kg	27142	25 Roll
DEA0021377	ES4FIBO-1.2X5-M			5 Meter	46.8 kg	67856	25 Roll
DEA0021378	ES4FIBO-1.2X10-M			10 Meter	93.6 kg	135728	25 Roll

ELECTRICAL SAFETY PRODUCTS

Electrical Insulating Matting Fabric Finish - IEC61111 - Dual Color Dark Grey / Orange


The insulating mats offer both individual and collective protection to operators. Crafted from high-quality elastomeric materials, these mats are specifically designed to cover the ground, ensuring the electrical safety of workers during repairs to electrical installations. By providing a reliable insulating barrier, these mats play a vital role in safeguarding operators from the risk of electric shocks, making them an indispensable safety measure in various industrial and commercial settings.

Kamfet Matting - Empowered by Dual-Color Technology

Incorporating **Dual-Color technology**, our insulating mats are meticulously engineered to elevate safety standards. This innovative design enables effortless **damage detection** to the top layer, facilitating prompt assessment and mat replacement decisions.

Kamfet insulation matting consistently showcases exceptional dielectric strength, rigorously tested in accordance with the stringent IEC 61111:2009 standards. Our unwavering commitment to quality ensures that our mats deliver reliable electrical insulation, meeting the highest industry benchmarks for safety and performance.

The **two colors** of the mat serve the purpose of mechanical damage indication and provide a visual cue to replace the mat when the color change becomes visible on the surface. This innovative feature helps users quickly identify wear and tear, ensuring timely replacement for optimal performance and safety.

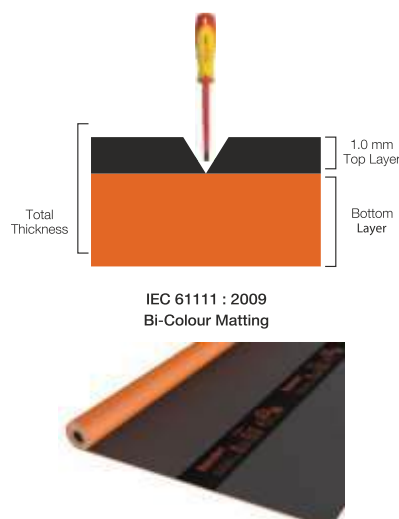

- Fully tested to specification IEC 61111:2009
- **Dual-Color (Life Indicator) Technology:** Grey on top and Orange on bottom
- High electrical resistance from 50 volts to 50,000 volts
- Suitable for both AC and DC applications
- Provides enhanced safety for operators against electrical shock
- Features an anti-slip surface finish, conforming to slip-resistant test
- Resistant to acid, oil, and low temperatures, ensuring durability
- Permanent marking-durable and un-erasable for clear identification
- Supplied with full traceability for quality assurance
- Requires minimal maintenance, ensuring long-lasting usability
- Constructed with highly durable and quality rubber compound
- Designed with highly flexible mats featuring a self-gripping design
- Anti-fatigue type, providing comfort during prolonged standing
- Operating temperature range: -40°C to +55°C, suitable for various environments
- Repetitive marking, with three markings every 1 meter
- Halogen-free, RoHS2, and REACH compliant, meeting environmental standards

Class 0 Maximum Working Voltage 1000 VAC and 1500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021299	ES0FIGO-1X1-M	2.2 mm	1.0 Meter	1 Meter	3.3 kg	4658	1 Roll
DEA0021300	ES0FIGO-1X2-M			2 Meter	6.6 kg	9300	1 Roll
DEA0021301	ES0FIGO-1X5-M			5 Meter	16.5 kg	23256	1 Roll
DEA0021302	ES0FIGO-1X10-M			10 Meter	33 kg	46498	1 Roll
DEA0021303	ES0FIGO-1.2X1-M		1.2 Meter	1 Meter	3.96 kg	5576	25 Roll
DEA0021304	ES0FIGO-1.2X2-M			2 Meter	7.92 kg	11168	25 Roll
DEA0021305	ES0FIGO-1.2X5-M			5 Meter	19.8 kg	27898	25 Roll
DEA0021306	ES0FIGO-1.2X10-M			10 Meter	39.6 kg	55812	25 Roll

ELECTRICAL SAFETY PRODUCTS

Class 1 Maximum Working Voltage 7500 VAC and 11250 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021307	ES1FIGO-1X1-M	2.2 mm	1.0 Meter	1 Meter	3.3 kg	4658	1 Roll
DEA0021308	ES1FIGO-1X2-M			2 Meter	6.6 kg	9314	1 Roll
DEA0021309	ES1FIGO-1X5-M			5 Meter	16.5 kg	23256	1 Roll
DEA0021310	ES1FIGO-1X10-M			10 Meter	33 kg	46498	1 Roll
DEA0021311	ES1FIGO-1.2X1-M		1.2 Meter	1 Meter	3.96 kg	6986	25 Roll
DEA0021312	ES1FIGO-1.2X2-M			2 Meter	7.92 kg	13972	25 Roll
DEA0021313	ES1FIGO-1.2X5-M			5 Meter	19.8 kg	34944	25 Roll
DEA0021314	ES1FIGO-1.2X10-M			10 Meter	39.6 kg	69888	25 Roll

Class 2 Maximum Working Voltage 17000 VAC and 25500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021315	ES2FIGO-1X1-M	2.6 mm	1.0 Meter	1 Meter	3.9 kg	5828	1 Roll
DEA0021316	ES2FIGO-1X2-M			2 Meter	7.8 kg	11644	1 Roll
DEA0021317	ES2FIGO-1X5-M			5 Meter	19.5 kg	29130	1 Roll
DEA0021318	ES2FIGO-1X10-M			10 Meter	39 kg	58246	1 Roll
DEA0021319	ES2FIGO-1.2X1-M		1.2 Meter	1 Meter	4.68 kg	6986	25 Roll
DEA0021320	ES2FIGO-1.2X2-M			2 Meter	9.36 kg	13972	25 Roll
DEA0021321	ES2FIGO-1.2X5-M			5 Meter	23.4 kg	34944	25 Roll
DEA0021322	ES2FIGO-1.2X10-M			10 Meter	46.8 kg	69888	25 Roll

Class 3 Maximum Working Voltage 26500 VAC and 39750 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021323	ES3FIGO-1X1-M	3.2 mm	1.0 Meter	1 Meter	4.8 kg	6644	1 Roll
DEA0021324	ES3FIGO-1X2-M			2 Meter	9.6 kg	13304	1 Roll
DEA0021325	ES3FIGO-1X5-M			5 Meter	24 kg	33238	1 Roll
DEA0021326	ES3FIGO-1X10-M			10 Meter	48 kg	66478	1 Roll
DEA0021327	ES3FIGO-1.2X1-M		1.2 Meter	1 Meter	5.76 kg	7980	25 Roll
DEA0021328	ES3FIGO-1.2X2-M			2 Meter	11.52 kg	15960	25 Roll
DEA0021329	ES3FIGO-1.2X5-M			5 Meter	28.8 kg	39884	25 Roll
DEA0021330	ES3FIGO-1.2X10-M			10 Meter	57.6 kg	79766	25 Roll

Class 4 Maximum Working Voltage 36000 VAC and 54000 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021331	ES4FIGO-1X1-M	5.2 mm	1.0 Meter	1 Meter	7.8 kg	11302	1 Roll
DEA0021332	ES4FIGO-1X2-M			2 Meter	15.6 kg	22618	1 Roll
DEA0021333	ES4FIGO-1X5-M			5 Meter	39 kg	56554	1 Roll
DEA0021334	ES4FIGO-1X10-M			10 Meter	78 kg	113108	1 Roll
DEA0021335	ES4FIGO-1.2X1-M		1.2 Meter	1 Meter	9.36 kg	13572	25 Roll
DEA0021336	ES4FIGO-1.2X2-M			2 Meter	18.72 kg	27142	25 Roll
DEA0021337	ES4FIGO-1.2X5-M			5 Meter	46.8 kg	67856	25 Roll
DEA0021338	ES4FIGO-1.2X10-M			10 Meter	93.6 kg	135,28	25 Roll

ELECTRICAL SAFETY PRODUCTS

Electrical Insulating Matting Fabric Glossy Finish - IEC61111 - Grey Color

Electrical Insulating Rubber Matting, also known as electrical safety mats or switchboard matting, is a rubber mat designed to provide electrical insulation and protect workers from electric shocks in areas where electrical equipment is operated. These mats are commonly used in industrial, commercial, and utility environments with a risk of electrical hazards.

Kamfet - Electrical Insulating Rubber Matting: Unmatched Safety, Unrivalled Quality

Introducing **Kamfet** Range of Electrical Insulating Rubber Matting, your ultimate solution for ensuring unparalleled safety in electrical environments. Also known as dielectric or electrical safety matting, our mats are meticulously designed to protect individuals against electrical shock from equipment in switch rooms, in front of switchboards, transformers, and in various high or low-voltage workplaces.



- Fully tested to specification IEC 61111:2009
- High electrical resistance from 50 volts to 50,000 volts
- Suitable for both AC and DC applications
- Provides enhanced safety for operators against electrical shock
- Features an anti-slip surface finish, conforming to slip-resistant test
- Resistant to acid, oil, and low temperatures, ensuring durability
- Permanent marking-durable and un-erasable for clear Identification
- Supplied with full traceability for quality assurance
- Requires minimal maintenance, ensuring long-lasting usability
- Constructed with highly durable and quality rubber compound
- Designed with highly flexible mats featuring a self-gripping design
- Anti-fatigue type, providing comfort during prolonged standing
- Operating temperature range: -40°C to +55°C, suitable for various environments
- Repetitive marking, with three markings every 1 meter
- Halogen-free, RoHS2, and REACH compliant, meeting environmental standards
- Color - **Dark Grey - Glossy Fabric Finish**

Class 0 Maximum Working Voltage 1000 VAC and 1500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020746	ES0FIG-0.6X1-M	2.2 mm	0.6 Meter	1 Meter	1.98 kg	2788	25 Roll
DEA0021226	ES0FIG-0.6X2-M			2 Meter	3.96 kg	5576	25 Roll
DEA0020747	ES0FIG-0.6X5-M			5 Meter	9.9 kg	13942	25 Roll
DEA0020748	ES0FIG-0.6X10-M			10 Meter	19.8 kg	27898	25 Roll
DEA0021207	ES0FIG-1X1-M		1.0 Meter	1 Meter	3.3 kg	4658	1 Roll
DEA0020454	ES0FIG-1X2-M			2 Meter	6.6 kg	9300	1 Roll
DEA0020749	ES0FIG-1X5-M			5 Meter	16.5 kg	23256	1 Roll
DEA0020750	ES0FIG-1X10-M			10 Meter	33 kg	46498	1 Roll
DEA0020751	ES0FIG-1.2X1-M		1.2 Meter	1 Meter	3.96 kg	5576	25 Roll
DEA0021227	ES0FIG-1.2X2-M			2 Meter	7.92 kg	11168	25 Roll
DEA0020752	ES0FIG-1.2X5-M			5 Meter	19.8 kg	27898	25 Roll
DEA0020753	ES0FIG-1.2X10-M			10 Meter	39.6 kg	55812	25 Roll

ELECTRICAL SAFETY PRODUCTS

Class 1 Maximum Working Voltage 7500 VAC and 11250 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020934	ES1FIG-0.6X1-M	2.2 mm	0.6 Meter	1 Meter	1.98 kg	2788	25 Roll
DEA0021228	ES1FIG-0.6X2-M			2 Meter	3.96 kg	5576	25 Roll
DEA0020935	ES1FIG-0.6X5-M			5 Meter	9.9 kg	13942	25 Roll
DEA0020936	ES1FIG-0.6X10-M			10 Meter	19.8 kg	27898	25 Roll
DEA0020937	ES1FIG-1X1-M		1.0 Meter	1 Meter	3.3 kg	4658	1 Roll
DEA0021219	ES1FIG-1X2-M			2 Meter	6.6 kg	9314	1 Roll
DEA0020938	ES1FIG-1X5-M			5 Meter	16.5 kg	23256	1 Roll
DEA0020939	ES1FIG-1X10-M			10 Meter	33 kg	46498	1 Roll
DEA0020940	ES1FIG-1.2X1-M		1.2 Meter	1 Meter	3.96 kg	5576	25 Roll
DEA0021240	ES1FIG-1.2X2-M			2 Meter	7.92 kg	11154	25 Roll
DEA0020941	ES1FIG-1.2X5-M			5 Meter	19.8 kg	27898	25 Roll
DEA0020942	ES1FIG-1.2X10-M			10 Meter	39.6 kg	55812	25 Roll

Class 2 Maximum Working Voltage 17000 VAC and 25500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020962	ES2FIG-0.6X1-M	2.6 mm	0.6 Meter	1 Meter	2.34 kg	3174	25 Roll
DEA0021252	ES2FIG-0.6X2-M			2 Meter	4.68 kg	6348	25 Roll
DEA0020963	ES2FIG-0.6X5-M			5 Meter	11.7 kg	15870	25 Roll
DEA0020964	ES2FIG-0.6X10-M			10 Meter	23.4 kg	31756	25 Roll
DEA0020965	ES2FIG-1X1-M		1.0 Meter	1 Meter	3.9 kg	5296	1 Roll
DEA0021188	ES2FIG-1X2-M			2 Meter	7.8 kg	10590	1 Roll
DEA0020966	ES2FIG-1X5-M			5 Meter	19.5 kg	26460	1 Roll
DEA0020967	ES2FIG-1X10-M			10 Meter	39 kg	52920	1 Roll
DEA0020968	ES2FIG-1.2X1-M		1.2 Meter	1 Meter	4.68 kg	6348	25 Roll
DEA0021253	ES2FIG-1.2X2-M			2 Meter	9.36 kg	12696	25 Roll
DEA0020741	ES2FIG-1.2X5-M			5 Meter	23.4 kg	31756	25 Roll
DEA0020740	ES2FIG-1.2X10-M			10 Meter	46.8 kg	63510	25 Roll

Class 3 Maximum Working Voltage 26500 VAC and 39750 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020986	ES3FIG-0.6X1-M	3.2 mm	0.6 Meter	1 Meter	2.88 kg	3708	25 Roll
DEA0021265	ES3FIG-0.6X2-M			2 Meter	5.76 kg	7430	25 Roll
DEA0020987	ES3FIG-0.6X5-M			5 Meter	14.4 kg	18584	25 Roll
DEA0020988	ES3FIG-0.6X10-M			10 Meter	28.8 kg	37168	25 Roll
DEA0020989	ES3FIG-1X1-M		1.0 Meter	1 Meter	4.8 kg	6200	1 Roll
DEA0021196	ES3FIG-1X2-M			2 Meter	9.6 kg	12400	1 Roll
DEA0020990	ES3FIG-1X5-M			5 Meter	24 kg	30970	1 Roll
DEA0020991	ES3FIG-1X10-M			10 Meter	48 kg	61954	1 Roll
DEA0020992	ES3FIG-1.2X1-M		1.2 Meter	1 Meter	5.76 kg	7430	25 Roll
DEA0021266	ES3FIG-1.2X2-M			2 Meter	11.52 kg	14876	25 Roll
DEA0020728	ES3FIG-1.2X5-M			5 Meter	28.8 kg	37168	25 Roll
DEA0020993	ES3FIG-1.2X10-M			10 Meter	57.6 kg	74338	25 Roll

Class 4 Maximum Working Voltage 36000 VAC and 54000 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021014	ES4FIG-0.6X1-M	5.2 mm	0.6 Meter	1 Meter	4.68 kg	7282	25 Roll
DEA0021279	ES4FIG-0.6X2-M			2 Meter	9.36 kg	12074	25 Roll
DEA0021015	ES4FIG-0.6X5-M			5 Meter	23.4 kg	36382	25 Roll
DEA0021016	ES4FIG-0.6X10-M			10 Meter	46.8 kg	72766	25 Roll
DEA0020569	ES4FIG-1X1-M		1.0 Meter	1 Meter	7.8 kg	10070	1 Roll
DEA0020774	ES4FIG-1X2-M			2 Meter	15.6 kg	20142	1 Roll
DEA0020773	ES4FIG-1X5-M			5 Meter	39 kg	50340	1 Roll
DEA0020568	ES4FIG-1X10-M			10 Meter	78 kg	100680	1 Roll
DEA0021012	ES4FIG-1.2X1-M		1.2 Meter	1 Meter	9.36 kg	12074	25 Roll
DEA0021280	ES4FIG-1.2X2-M			2 Meter	18.72 kg	24146	25 Roll
DEA0020224	ES4FIG-1.2X5-M			5 Meter	46.8 kg	60410	25 Roll
DEA0021013	ES4FIG-1.2X10-M			10 Meter	93.6 kg	120836	25 Roll

ELECTRICAL SAFETY PRODUCTS

Electrical Insulating Matting Fabric Finish - IEC61111 - Light Grey Color

Electrical Insulating Rubber Matting, also known as electrical safety mats or switchboard matting, is a rubber mat designed to provide electrical insulation and protect workers from electric shocks in areas where electrical equipment is operated. These mats are commonly used in industrial, commercial, and utility environments with a risk of electrical hazards.

Kamfet - Electrical Insulating Rubber Matting: Unmatched Safety, Unrivalled Quality

Introducing **Kamfet** Range of Electrical Insulating Rubber Matting, your ultimate solution for ensuring unparalleled safety in electrical environments. Also known as dielectric or electrical safety matting, our mats are meticulously designed to protect individuals against electrical shock from equipment in switch rooms, in front of switchboards, transformers, and in various high or low-voltage workplaces.



- Fully tested to specification IEC 61111:2009
- High electrical resistance from 50 volts to 50,000 volts
- Suitable for both AC and DC applications
- Provides enhanced safety for operators against electrical shock
- Features an anti-slip surface finish, conforming to slip-resistant test
- Resistant to acid, oil, and low temperatures, ensuring durability
- Permanent marking-durable and un-erasable for clear identification
- Supplied with full traceability for quality assurance
- Requires minimal maintenance, ensuring long-lasting usability
- Constructed with highly durable and quality rubber compound
- Designed with highly flexible mats featuring a self-gripping design
- Anti-fatigue type, providing comfort during prolonged standing
- Operating temperature range: -40°C to +55°C, suitable for various environments
- Repetitive marking, with three markings every 1 meter
- Halogen-free, RoHS2, and REACH compliant, meeting environmental standards
- Color - **Light Grey - Glossy Fabric Finish**

Class 0 Maximum Working Voltage 1000 VAC and 1500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight	List Price (INR) Per Roll	MOQ
DEA0021532	ES0FIC-0.6X1-M	2.2 mm	0.6 Meter	1 Meter	1.98 kg	2788	25 Roll
DEA0021533	ES0FIC-0.6X2-M			2 Meter	3.96 kg	5576	25 Roll
DEA0021206	ES0FIC-0.6X5-M			5 Meter	9.9 kg	13942	25 Roll
DEA0021534	ES0FIC-0.6X10-M			10 Meter	19.8 kg	27898	25 Roll
DEA0021535	ES0FIC-1X1-M		1.0 Meter	1 Meter	3.3 kg	4658	25 Roll
DEA0021536	ES0FIC-1X2-M			2 Meter	6.6 kg	9300	25 Roll
DEA0021539	ES0FIC-1X5-M			5 Meter	16.5 kg	23256	25 Roll
DEA0021541	ES0FIC-1X10-M			10 Meter	33 kg	46498	25 Roll
DEA0021543	ES0FIC-1.2X1-M		1.2 Meter	1 Meter	3.96 kg	5576	25 Roll
DEA0021546	ES0FIC-1.2X2-M			2 Meter	7.92 kg	11168	25 Roll
DEA0021548	ES0FIC-1.2X5-M			5 Meter	19.8 kg	27898	25 Roll
DEA0021550	ES0FIC-1.2X10-M			10 Meter	39.6 kg	55812	25 Roll

ELECTRICAL SAFETY PRODUCTS

Class 1 Maximum Working Voltage 7500 VAC and 11250 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021552	ES1FIC-0.6X1-M	2.2 mm	0.6 Meter	1 Meter	1.98 kg	2788	25 Roll
DEA0021555	ES1FIC-0.6X2-M			2 Meter	3.96 kg	5576	25 Roll
DEA0021557	ES1FIC-0.6X5-M			5 Meter	9.9 kg	13942	25 Roll
DEA0021559	ES1FIC-0.6X10-M			10 Meter	19.8 kg	27898	25 Roll
DEA0021561	ES1FIC-1X1-M		1.0 Meter	1 Meter	3.3 kg	4658	25 Roll
DEA0021563	ES1FIC-1X2-M			2 Meter	6.6 kg	9314	25 Roll
DEA0021565	ES1FIC-1X5-M			5 Meter	16.5 kg	23256	25 Roll
DEA0021566	ES1FIC-1X10-M			10 Meter	33 kg	46498	25 Roll
DEA0021567	ES1FIC-1.2X1-M		1.2 Meter	1 Meter	3.96 kg	5576	25 Roll
DEA0021568	ES1FIC-1.2X2-M			2 Meter	7.92 kg	11154	25 Roll
DEA0021569	ES1FIC-1.2X5-M			5 Meter	19.8 kg	27898	25 Roll
DEA0021571	ES1FIC-1.2X10-M			10 Meter	39.6 kg	55812	25 Roll

Class 2 Maximum Working Voltage 17000 VAC and 25500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021574	ES2FIC-0.6X1-M	2.6 mm	0.6 Meter	1 Meter	2.34 kg	3174	25 Roll
DEA0021576	ES2FIC-0.6X2-M			2 Meter	4.68 kg	6348	25 Roll
DEA0021580	ES2FIC-0.6X5-M			5 Meter	11.7 kg	15870	25 Roll
DEA0021582	ES2FIC-0.6X10-M			10 Meter	23.4 kg	31756	25 Roll
DEA0021585	ES2FIC-1X1-M		1.0 Meter	1 Meter	3.9 kg	5296	25 Roll
DEA0021587	ES2FIC-1X2-M			2 Meter	7.8 kg	10590	25 Roll
DEA0021590	ES2FIC-1X5-M			5 Meter	19.5 kg	26460	25 Roll
DEA0021591	ES2FIC-1X10-M			10 Meter	39 kg	52920	25 Roll
DEA0021592	ES2FIC-1.2X1-M		1.2 Meter	1 Meter	4.68 kg	6348	25 Roll
DEA0021593	ES2FIC-1.2X2-M			2 Meter	9.36 kg	12696	25 Roll
DEA0021595	ES2FIC-1.2X5-M			5 Meter	23.4 kg	31756	25 Roll
DEA0021600	ES2FIC-1.2X10-M			10 Meter	46.8 kg	63510	25 Roll

Class 3 Maximum Working Voltage 26500 VAC and 39750 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021603	ES3FIC-0.6X1-M	3.2 mm	0.6 Meter	1 Meter	2.88 kg	3708	25 Roll
DEA0021604	ES3FIC-0.6X2-M			2 Meter	5.76 kg	7430	25 Roll
DEA0021605	ES3FIC-0.6X5-M			5 Meter	14.4 kg	18584	25 Roll
DEA0021606	ES3FIC-0.6X10-M			10 Meter	28.8 kg	37168	25 Roll
DEA0021607	ES3FIC-1X1-M		1.0 Meter	1 Meter	4.8 kg	6200	25 Roll
DEA0021608	ES3FIC-1X2-M			2 Meter	9.6 kg	12400	25 Roll
DEA0021609	ES3FIC-1X5-M			5 Meter	24 kg	30970	25 Roll
DEA0021205	ES3FIC-1X10-M			10 Meter	48 kg	61954	25 Roll
DEA0021610	ES3FIC-1.2X1-M		1.2 Meter	1 Meter	5.76 kg	7430	25 Roll
DEA0021611	ES3FIC-1.2X2-M			2 Meter	11.52 kg	14876	25 Roll
DEA0021612	ES3FIC-1.2X5-M			5 Meter	28.8 kg	37168	25 Roll
DEA0021613	ES3FIC-1.2X10-M			10 Meter	57.6 kg	74338	25 Roll

Class 4 Maximum Working Voltage 36000 VAC and 54000 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021614	ES4FIC-0.6X1-M	5.2 mm	0.6 Meter	1 Meter	4.68 kg	7282	25 Roll
DEA0021615	ES4FIC-0.6X2-M			2 Meter	9.36 kg	12074	25 Roll
DEA0021616	ES4FIC-0.6X5-M			5 Meter	23.4 kg	36382	25 Roll
DEA0021617	ES4FIC-0.6X10-M			10 Meter	46.8 kg	72766	25 Roll
DEA0021618	ES4FIC-1X1-M		1.0 Meter	1 Meter	7.8 kg	10070	25 Roll
DEA0021619	ES4FIC-1X2-M			2 Meter	15.6 kg	20142	25 Roll
DEA0021620	ES4FIC-1X5-M			5 Meter	39 kg	50340	25 Roll
DEA0021621	ES4FIC-1X10-M			10 Meter	78 kg	100680	25 Roll
DEA0021622	ES4FIC-1.2X1-M		1.2 Meter	1 Meter	9.36 kg	12074	25 Roll
DEA0021623	ES4FIC-1.2X2-M			2 Meter	18.72 kg	24146	25 Roll
DEA0021624	ES4FIC-1.2X5-M			5 Meter	46.8 kg	60410	25 Roll
DEA0021625	ES4FIC-1.2X10-M			10 Meter	93.6 kg	120836	25 Roll

ELECTRICAL SAFETY PRODUCTS

Electrical Insulating Matting Fabric Finish - IEC61111 - Black Color

Electrical Insulating Rubber Matting, also known as electrical safety mats or switchboard matting, is a rubber mat designed to provide electrical insulation and protect workers from electric shocks in areas where electrical equipment is operated. These mats are commonly used in industrial, commercial, and utility environments with a risk of electrical hazards.

Kamfet - Electrical Insulating Rubber Matting: Unmatched Safety, Unrivalled Quality

Introducing **Kamfet** Range of Electrical Insulating Rubber Matting, your ultimate solution for ensuring unparalleled safety in electrical environments. Also known as dielectric or electrical safety matting, our mats are meticulously designed to protect individuals against electrical shock from equipment in switch rooms, in front of switchboards, transformers, and in various high or low-voltage workplaces.



Fully tested to specification IEC 61111:2009

- High electrical resistance from 50 volts to 50,000 volts
- Suitable for both AC and DC applications
- Provides enhanced safety for operators against electrical shock
- Features an anti-slip surface finish, conforming to slip-resistant test
- Resistant to acid, oil, and low temperatures, ensuring durability
- Permanent marking-durable and un-erasable for clear identification
- Supplied with full traceability for quality assurance
- Requires minimal maintenance, ensuring long-lasting usability
- Constructed with highly durable and quality rubber compound
- Designed with highly flexible mats featuring a self-gripping design
- Anti-fatigue type, providing comfort during prolonged standing
- Operating temperature range: -40°C to +55°C, suitable for various environments
- Repetitive marking, with three markings every 1 meter
- Halogen-free, RoHS2, and REACH compliant, meeting environmental standards
- Color - **Black - Glossy Fabric Finish**

Class 0 Maximum Working Voltage 1000 VAC and 1500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020754	ES0FIB-0.6X1-M	2.2 mm	0.6 Meter	1 Meter	1.98 kg	2788	25 Roll
DEA0021381	ES0FIB-0.6X2-M			2 Meter	3.96 kg	5576	25 Roll
DEA0020755	ES0FIB-0.6X5-M			5 Meter	9.9 kg	13942	25 Roll
DEA0020756	ES0FIB-0.6X10-M			10 Meter	19.8 kg	27898	25 Roll
DEA0020573	ES0FIB-1X1-M		1.0 Meter	1 Meter	3.3 kg	4658	25 Roll
DEA0021229	ES0FIB-1X2-M			2 Meter	6.6 kg	9300	25 Roll
DEA0020757	ES0FIB-1X5-M			5 Meter	16.5 kg	23256	25 Roll
DEA0020758	ES0FIB-1X10-M			10 Meter	33 kg	46498	25 Roll
DEA0020759	ES0FIB-1.2X1-M		1.2 Meter	1 Meter	3.96 kg	5576	25 Roll
DEA0021230	ES0FIB-1.2X2-M			2 Meter	7.92 kg	11168	25 Roll
DEA0020760	ES0FIB-1.2X5-M			5 Meter	19.8 kg	27898	25 Roll
DEA0020761	ES0FIB-1.2X10-M			10 Meter	39.6 kg	55812	25 Roll

ELECTRICAL SAFETY PRODUCTS

Class 1 Maximum Working Voltage 7500 VAC and 11250 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020775	ES1FIB-0.6X1-M	2.2 mm	0.6 Meter	1 Meter	1.98 kg	2788	25 Roll
DEA0021241	ES1FIB-0.6X2-M			2 Meter	3.96 kg	5576	25 Roll
DEA0020776	ES1FIB-0.6X5-M			5 Meter	9.9 kg	13942	25 Roll
DEA0020777	ES1FIB-0.6X10-M			10 Meter	19.8 kg	27898	25 Roll
DEA0020778	ES1FIB-1X1-M		1.0 Meter	1 Meter	3.3 kg	4658	25 Roll
DEA0021197	ES1FIB-1X2-M			2 Meter	6.6 kg	9314	25 Roll
DEA0020779	ES1FIB-1X5-M			5 Meter	16.5 kg	23256	25 Roll
DEA0020780	ES1FIB-1X10-M			10 Meter	33 kg	46498	25 Roll
DEA0020781	ES1FIB-1.2X1-M		1.2 Meter	1 Meter	3.96 kg	5576	25 Roll
DEA0021242	ES1FIB-1.2X2-M			2 Meter	7.92 kg	11154	25 Roll
DEA0020782	ES1FIB-1.2X5-M			5 Meter	19.8 kg	27898	25 Roll
DEA0020783	ES1FIB-1.2X10-M			10 Meter	39.6 kg	55812	25 Roll

Class 2 Maximum Working Voltage 17000 VAC and 25500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020793	ES2FIB-0.6X1-M	2.6 mm	0.6 Meter	1 Meter	2.34 kg	3174	25 Roll
DEA0021257	ES2FIB-0.6X2-M			2 Meter	4.68 kg	6348	25 Roll
DEA0020794	ES2FIB-0.6X5-M			5 Meter	11.7 kg	15870	25 Roll
DEA0020798	ES2FIB-0.6X10-M			10 Meter	23.4 kg	31756	25 Roll
DEA0020795	ES2FIB-1X1-M		1.0 Meter	1 Meter	3.9 kg	5296	25 Roll
DEA0021173	ES2FIB-1X2-M			2 Meter	7.8 kg	10590	25 Roll
DEA0020796	ES2FIB-1X5-M			5 Meter	19.5 kg	26460	25 Roll
DEA0020797	ES2FIB-1X10-M			10 Meter	39 kg	52920	25 Roll
DEA0020799	ES2FIB-1.2X1-M		1.2 Meter	1 Meter	4.68 kg	6348	25 Roll
DEA0021258	ES2FIB-1.2X2-M			2 Meter	9.36 kg	12696	25 Roll
DEA0020800	ES2FIB-1.2X5-M			5 Meter	23.4 kg	31756	25 Roll
DEA0020801	ES2FIB-1.2X10-M			10 Meter	46.8 kg	63510	25 Roll

Class 3 Maximum Working Voltage 26500 VAC and 39750 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020811	ES3FIB-0.6X1-M	3.2 mm	0.6 Meter	1 Meter	2.88 kg	3708	25 Roll
DEA0021270	ES3FIB-0.6X2-M			2 Meter	5.76 kg	7430	25 Roll
DEA0020812	ES3FIB-0.6X5-M			5 Meter	14.4 kg	18584	25 Roll
DEA0020813	ES3FIB-0.6X10-M			10 Meter	28.8 kg	37168	25 Roll
DEA0020814	ES3FIB-1X1-M		1.0 Meter	1 Meter	4.8 kg	6200	25 Roll
DEA0021271	ES3FIB-1X2-M			2 Meter	9.6 kg	12400	25 Roll
DEA0020815	ES3FIB-1X5-M			5 Meter	24 kg	30970	25 Roll
DEA0020816	ES3FIB-1X10-M			10 Meter	48 kg	61954	25 Roll
DEA0020817	ES3FIB-1.2X1-M		1.2 Meter	1 Meter	5.76 kg	7430	25 Roll
DEA0021272	ES3FIB-1.2X2-M			2 Meter	11.52 kg	14876	25 Roll
DEA0020826	ES3FIB-1.2X5-M			5 Meter	28.8 kg	37168	25 Roll
DEA0020818	ES3FIB-1.2X10-M			10 Meter	57.6 kg	74338	25 Roll

Class 4 Maximum Working Voltage 36000 VAC and 54000 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020829	ES4FIB-0.6X1-M	5.2 mm	0.6 Meter	1 Meter	4.68 kg	7282	25 Roll
DEA0021283	ES4FIB-0.6X2-M			2 Meter	9.36 kg	12074	25 Roll
DEA0020830	ES4FIB-0.6X5-M			5 Meter	23.4 kg	36382	25 Roll
DEA0020831	ES4FIB-0.6X10-M			10 Meter	46.8 kg	72766	25 Roll
DEA0020832	ES4FIB-1X1-M		1.0 Meter	1 Meter	7.8 kg	10070	25 Roll
DEA0021174	ES4FIB-1X2-M			2 Meter	15.6 kg	20142	25 Roll
DEA0020833	ES4FIB-1X5-M			5 Meter	39 kg	50340	25 Roll
DEA0020834	ES4FIB-1X10-M			10 Meter	78 kg	100680	25 Roll
DEA0020835	ES4FIB-1.2X1-M		1.2 Meter	1 Meter	9.36 kg	12074	25 Roll
DEA0021284	ES4FIB-1.2X2-M			2 Meter	18.72 kg	22064	25 Roll
DEA0020836	ES4FIB-1.2X5-M			5 Meter	46.8 kg	60410	25 Roll
DEA0020837	ES4FIB-1.2X10-M			10 Meter	93.6 kg	120836	25 Roll

ELECTRICAL SAFETY PRODUCTS

Electrical Insulating Matting Corrugated Finish - IEC61111 - Dark Grey Color

Kamfet - Electrical Insulating Rubber Matting: Unmatched Safety, Unrivalled Quality. Kamfet's

Electrical Insulating Rubber Matting range is your ultimate solution for ensuring unparalleled safety in electrical environments. Also known as dielectric or electrical safety matting, our mats are meticulously designed to protect individuals against electrical shock from equipment in switch rooms, in front of switchboards, transformers, and in various high or low-voltage workplaces.

The Electrical Insulating Rubber Matting - Corrugated (Fine Ribbed) is crafted in accordance with the IEC 61111: 2009 standards. Its top surface features a fine ribbed corrugation designed to prevent slipping and efficiently trap dust. The bottom surface is fashioned with a fabric design to enhance safety, ensuring superb traction on various surfaces.

With its corrugated (fine ribbed) pattern, this electrical insulating mat is manufactured using specialised raw materials, resulting in exceptional tear resistance and wear durability. Its long-lasting performance eliminates the need for frequent replacements, reducing maintenance costs significantly.

One side of the mat displays a fine ribbed, anti-slip surface. In contrast, the reverse side boasts a fabric cloth impression finish, providing a versatile and secure solution for various applications.



- Anti-Slip Electrical Insulation Rubber Matting - Corrugated Finish (Fine Ribbed)
- Fully tested to specification IEC 61111:2009
- High electrical resistance from 50 volts to 50,000 volts
- Suitable for both AC and DC applications
- Provides safety for operators against electrical shock
- Anti-slip surface finishes conforming to slip-resistant tests
- Resistant to acid, oil, and low temperatures
- Permanent marking - durable and un-erasable
- Fully traceable supply
- Highly durable & quality rubber compound
- Anti-fatigue type, comfortable for long periods of standing
- Operating temperature: -40°C to +55°C
- Repetitive marking (3 markings every 1 meter)
- Halogen-free, RoHS2, and REACH compliant
- Good weight support, wear-resistant
- Color: **Dark Grey - Corrugated Glossy Finish**

Class 0 Maximum Working Voltage 1000 VAC and 1500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020925	ES0CIG-0.6X1-M	3.1 mm	0.6 Meter	1 Meter	2.79 kg	3382	50 Roll
DEA0021234	ES0CIG-0.6X2-M			2 Meter	5.58 kg	6778	50 Roll
DEA0020926	ES0CIG-0.6X5-M			5 Meter	13.95 kg	16938	50 Roll
DEA0020927	ES0CIG-0.6X10-M			10 Meter	27.9 kg	33892	50 Roll
DEA0020928	ES0CIG-1X1-M		1.0 Meter	1 Meter	4.65 kg	5474	50 Roll
DEA0021235	ES0CIG-1X2-M			2 Meter	9.3 kg	10946	50 Roll
DEA0020929	ES0CIG-1X5-M			5 Meter	23.25 kg	27380	50 Roll
DEA0020930	ES0CIG-1X10-M			10 Meter	46.5 kg	54760	50 Roll
DEA0020931	ES0CIG-1.2X1-M		1.2 Meter	1 Meter	5.58 kg	6570	50 Roll
DEA0021236	ES0CIG-1.2X2-M			2 Meter	11.16 kg	13126	50 Roll
DEA0020932	ES0CIG-1.2X5-M			5 Meter	27.9 kg	32824	50 Roll
DEA0020933	ES0CIG-1.2X10-M			10 Meter	55.8 kg	65662	50 Roll

ELECTRICAL SAFETY PRODUCTS

Class 1 Maximum Working Voltage 7500 VAC and 11250 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020952	ES1CIG-0.6X1-M	3.1 mm	0.6 Meter	1 Meter	2.79 kg	3382	50 Roll
DEA0021246	ES1CIG-0.6X2-M			2 Meter	5.58 kg	13126	50 Roll
DEA0020953	ES1CIG-0.6X5-M			5 Meter	13.95 kg	32824	50 Roll
DEA0020954	ES1CIG-0.6X10-M			10 Meter	27.9 kg	65662	50 Roll
DEA0020955	ES1CIG-1X1-M		1.0 Meter	1 Meter	4.65 kg	5474	50 Roll
DEA0021247	ES1CIG-1X2-M			2 Meter	9.3 kg	10946	50 Roll
DEA0020956	ES1CIG-1X5-M			5 Meter	23.25 kg	27380	50 Roll
DEA0020957	ES1CIG-1X10-M			10 Meter	46.5 kg	54760	50 Roll
DEA0020958	ES1CIG-1.2X1-M		1.2 Meter	1 Meter	5.58 kg	6570	50 Roll
DEA0021248	ES1CIG-1.2X2-M			2 Meter	11.16 kg	13126	50 Roll
DEA0020959	ES1CIG-1.2X5-M			5 Meter	27.9 kg	32824	50 Roll
DEA0020960	ES1CIG-1.2X10-M			10 Meter	55.8 kg	65662	50 Roll

Class 2 Maximum Working Voltage 17000 VAC and 25500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020969	ES2CIG-0.6X1-M	3.7 mm	0.6 Meter	1 Meter	3.33 kg	4836	50 Roll
DEA0021254	ES2CIG-0.6X2-M			2 Meter	6.66 kg	9686	50 Roll
DEA0020970	ES2CIG-0.6X5-M			5 Meter	16.65 kg	24206	50 Roll
DEA0020971	ES2CIG-0.6X10-M			10 Meter	33.3 kg	48412	50 Roll
DEA0020972	ES2CIG-1X1-M		1.0 Meter	1 Meter	5.55 kg	6778	50 Roll
DEA0021255	ES2CIG-1X2-M			2 Meter	11.1 kg	13556	50 Roll
DEA0020973	ES2CIG-1X5-M			5 Meter	27.75 kg	33892	50 Roll
DEA0020974	ES2CIG-1X10-M			10 Meter	55.5 kg	67782	50 Roll
DEA0020975	ES2CIG-1.2X1-M		1.2 Meter	1 Meter	6.66 kg	8084	50 Roll
DEA0021256	ES2CIG-1.2X2-M			2 Meter	13.32 kg	16152	50 Roll
DEA0020976	ES2CIG-1.2X5-M			5 Meter	33.3 kg	40388	50 Roll
DEA0020977	ES2CIG-1.2X10-M			10 Meter	66.6 kg	80790	50 Roll

Class 3 Maximum Working Voltage 26500 VAC and 39750 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020994	ES3CIG-0.6X1-M	4.3 mm	0.6 Meter	1 Meter	3.87 kg	4776	50 Roll
DEA0021267	ES3CIG-0.6X2-M			2 Meter	7.74 kg	9566	50 Roll
DEA0020995	ES3CIG-0.6X5-M			5 Meter	19.35 kg	23910	50 Roll
DEA0020996	ES3CIG-0.6X10-M			10 Meter	38.7 kg	47804	50 Roll
DEA0020997	ES3CIG-1X1-M		1.0 Meter	1 Meter	6.45 kg	7994	50 Roll
DEA0021268	ES3CIG-1X2-M			2 Meter	12.9 kg	15974	50 Roll
DEA0020998	ES3CIG-1X5-M			5 Meter	32.25 kg	39942	50 Roll
DEA0020999	ES3CIG-1X10-M			10 Meter	64.5 kg	79886	50 Roll
DEA0021000	ES3CIG-1.2X1-M		1.2 Meter	1 Meter	7.74 kg	9596	50 Roll
DEA0021269	ES3CIG-1.2X2-M			2 Meter	15.48 kg	19178	50 Roll
DEA0021001	ES3CIG-1.2X5-M			5 Meter	38.7 kg	47952	50 Roll
DEA0021002	ES3CIG-1.2X10-M			10 Meter	77.4 kg	95918	50 Roll

Class 4 Maximum Working Voltage 36000 VAC and 54000 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021204	ES4CIG-0.6X1-M	6.8 mm	0.6 Meter	1 Meter	6.12 kg	7964	50 Roll
DEA0021281	ES4CIG-0.6X2-M			2 Meter	12.24 kg	15914	50 Roll
DEA0021010	ES4CIG-0.6X5-M			5 Meter	30.6 kg	39794	50 Roll
DEA0021011	ES4CIG-0.6X10-M			10 Meter	61.2 kg	79574	50 Roll
DEA0021017	ES4CIG-1X1-M		1.0 Meter	1 Meter	10.2 kg	13290	50 Roll
DEA0021282	ES4CIG-1X2-M			2 Meter	20.4 kg	26564	50 Roll
DEA0021018	ES4CIG-1X5-M			5 Meter	51 kg	66418	50 Roll
DEA0021019	ES4CIG-1.2X10-M			10 Meter	102 kg	132836	50 Roll
DEA0021020	ES4CIG-1.2X1-M		1.2 Meter	1 Meter	12.24 kg	15914	50 Roll
DEA0021447	ES4CIG-1.2X2-M			2 Meter	24.48 kg	31830	50 Roll
DEA0021021	ES4CIG-1.2X5-M			5 Meter	61.2 kg	79574	50 Roll
DEA0021022	ES4CIG-1X10-M			10 Meter	122.4 kg	159148	50 Roll

ELECTRICAL SAFETY PRODUCTS

Electrical Insulating Matting Corrugated Finish - IEC61111 - Black Color

Kamfet - Electrical Insulating Rubber Matting: Unmatched Safety, Unrivalled Quality

Kamfet's Electrical Insulating Rubber Matting range is your ultimate solution for ensuring unparalleled safety in electrical environments. Also known as dielectric or electrical safety matting, our mats are meticulously designed to protect individuals against electrical shock from equipment in switch rooms, in front of switchboards, transformers, and in various high or low-voltage workplaces.

The Electrical Insulating Rubber Matting - Corrugated (Fine Ribbed) is crafted in accordance with the IEC 61111: 2009 standards. Its top surface features a fine ribbed corrugation designed to prevent slipping and efficiently trap dust. The bottom surface is fashioned with a fabric design to enhance safety, ensuring superb traction on various surfaces.

With its corrugated (fine ribbed) pattern, this electrical insulating mat is manufactured using specialised raw materials, resulting in exceptional tear resistance and wear durability. Its long-lasting performance eliminates the need for frequent replacements, reducing maintenance costs significantly.

One side of the mat displays a fine ribbed, anti-slip surface. In contrast, the reverse side boasts a fabric cloth impression finish, providing a versatile and secure solution for various applications.



- Anti-Slip Electrical Insulation Rubber Matting - Corrugated Finish (Fine Ribbed)
- Fully tested to specification IEC 61111:2009
- High electrical resistance from 50 volts to 50,000 volts
- Suitable for both AC and DC applications
- Provides safety for operators against electrical shock
- Anti-slip surface finishes conforming to slip-resistant tests
- Resistant to acid, oil, and low temperatures
- Permanent marking - durable and un-erasable
- Fully traceable supply
- Highly durable & quality rubber compound
- Anti-fatigue type, comfortable for long periods of standing
- Operating temperature: -40°C to +55°C
- Repetitive marking (3 markings every 1 meter)
- Halogen-free, RoHS2, and REACH compliant
- Good weight support, wear-resistant
- Color: **Black - Corrugated Glossy Finish**

Class 0 Maximum Working Voltage 1000 VAC and 1500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020764	ES0CIB-0.6X1-M	3.1 mm	0.6 Meter	1 Meter	2.79 kg	3382	50 Roll
DEA0021237	ES0CIB-0.6X2-M			2 Meter	5.58 kg	6778	50 Roll
DEA0020765	ES0CIB-0.6X5-M			5 Meter	13.95 kg	16938	50 Roll
DEA0020766	ES0CIB-0.6X10-M			10 Meter	27.9 kg	33892	50 Roll
DEA0020767	ES0CIB-1X1-M		1.0 Meter	1 Meter	4.65 kg	5474	50 Roll
DEA0021238	ES0CIB-1X2-M			2 Meter	9.3 kg	10946	50 Roll
DEA0020768	ES0CIB-1X5-M			5 Meter	23.25 kg	27380	50 Roll
DEA0020769	ES0CIB-1X10-M			10 Meter	46.5 kg	54760	50 Roll
DEA0020770	ES0CIB-1.2X1-M		1.2 Meter	1 Meter	5.58 kg	6570	50 Roll
DEA0021239	ES0CIB-1.2X2-M			2 Meter	11.16 kg	13126	50 Roll
DEA0020771	ES0CIB-1.2X5-M			5 Meter	27.9 kg	32824	50 Roll
DEA0020772	ES0CIB-1.2X10-M			10 Meter	55.8 kg	65662	50 Roll

ELECTRICAL SAFETY PRODUCTS

Class 1 Maximum Working Voltage 7500 VAC and 11250 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020784	ES1CIB-0.6X1-M	3.1 mm	0.6 Meter	1 Meter	2.79 kg	3382	50 Roll
DEA0021249	ES1CIB-0.6X2-M			2 Meter	5.58 kg	13126	50 Roll
DEA0020785	ES1CIB-0.6X5-M			5 Meter	13.95 kg	32824	50 Roll
DEA0020786	ES1CIB-0.6X10-M			10 Meter	27.9 kg	65662	50 Roll
DEA0020787	ES1CIB-1X1-M		1.0 Meter	1 Meter	4.65 kg	5474	50 Roll
DEA0021250	ES1CIB-1X2-M			2 Meter	9.3 kg	10946	50 Roll
DEA0020788	ES1CIB-1X5-M			5 Meter	23.25 kg	27380	50 Roll
DEA0020789	ES1CIB-1X10-M			10 Meter	46.5 kg	54760	50 Roll
DEA0020790	ES1CIB-1.2X1-M		1.2 Meter	1 Meter	5.58 kg	6570	50 Roll
DEA0021251	ES1CIB-1.2X2-M			2 Meter	11.16 kg	13126	50 Roll
DEA0020791	ES1CIB-1.2X5-M			5 Meter	27.9 kg	32824	50 Roll
DEA0020792	ES1CIB-1.2X10-M			10 Meter	55.8 kg	65662	50 Roll

Class 2 Maximum Working Voltage 17000 VAC and 25500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020802	ES2CIB-0.6X1-M	3.7 mm	0.6 Meter	1 Meter	3.33 kg	4836	50 Roll
DEA0021259	ES2CIB-0.6X2-M			2 Meter	6.66 kg	9686	50 Roll
DEA0020803	ES2CIB-0.6X5-M			5 Meter	16.65 kg	24206	50 Roll
DEA0020804	ES2CIB-0.6X10-M			10 Meter	33.3 kg	48412	50 Roll
DEA0020805	ES2CIB-1X1-M		1.0 Meter	1 Meter	5.55 kg	6778	50 Roll
DEA0021260	ES2CIB-1X2-M			2 Meter	11.1 kg	13556	50 Roll
DEA0020806	ES2CIB-1X5-M			5 Meter	27.75 kg	33892	50 Roll
DEA0020807	ES2CIB-1X10-M			10 Meter	55.5 kg	67782	50 Roll
DEA0020808	ES2CIB-1.2X1-M		1.2 Meter	1 Meter	6.66 kg	8084	50 Roll
DEA0021261	ES2CIB-1.2X2-M			2 Meter	13.32 kg	16152	50 Roll
DEA0020809	ES2CIB-1.2X5-M			5 Meter	33.3 kg	40388	50 Roll
DEA0020810	ES2CIB-1.2X10-M			10 Meter	66.6 kg	80790	50 Roll

Class 3 Maximum Working Voltage 26500 VAC and 39750 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020819	ES3CIB-0.6X1-M	4.3 mm	0.6 Meter	1 Meter	3.87 kg	4776	50 Roll
DEA0021273	ES3CIB-0.6X2-M			2 Meter	7.74 kg	9566	50 Roll
DEA0020820	ES3CIB-0.6X5-M			5 Meter	19.35 kg	23910	50 Roll
DEA0020821	ES3CIB-0.6X10-M			10 Meter	38.7 kg	47804	50 Roll
DEA0020822	ES3CIB-1X1-M		1.0 Meter	1 Meter	6.45 kg	7994	50 Roll
DEA0021274	ES3CIB-1X2-M			2 Meter	12.9 kg	15974	50 Roll
DEA0020823	ES3CIB-1X5-M			5 Meter	32.25 kg	39942	50 Roll
DEA0020824	ES3CIB-1X10-M			10 Meter	64.5 kg	79886	50 Roll
DEA0020825	ES3CIB-1.2X1-M		1.2 Meter	1 Meter	7.74 kg	9596	50 Roll
DEA0021275	ES3CIB-1.2X2-M			2 Meter	15.48 kg	19178	50 Roll
DEA0020827	ES3CIB-1.2X5-M			5 Meter	38.7 kg	47952	50 Roll
DEA0020828	ES3CIB-1.2X10-M			10 Meter	77.4 kg	95918	50 Roll

Class 4 Maximum Working Voltage 36000 VAC and 54000 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0020838	ES4CIB-0.6X1-M	6.8 mm	0.6 Meter	1 Meter	6.12 kg	7964	50 Roll
DEA0021285	ES4CIB-0.6X2-M			2 Meter	12.24 kg	15914	50 Roll
DEA0020843	ES4CIB-0.6X5-M			5 Meter	30.6 kg	39794	50 Roll
DEA0020839	ES4CIB-0.6X10-M			10 Meter	61.2 kg	79574	50 Roll
DEA0020840	ES4CIB-1X1-M		1.0 Meter	1 Meter	10.2 kg	13290	50 Roll
DEA0021286	ES4CIB-1X2-M			2 Meter	20.4 kg	26564	50 Roll
DEA0020841	ES4CIB-1X5-M			5 Meter	51 kg	66418	50 Roll
DEA0020842	ES4CIB-1X10-M			10 Meter	102 kg	132836	50 Roll
DEA0020844	ES4CIB-1.2X1-M		1.2 Meter	1 Meter	12.24 kg	15914	50 Roll
DEA0400004	ES4CIB-1.2X2-M			2 Meter	24.48 kg	31830	50 Roll
DEA0021446	ES4CIB-1.2X5-M			5 Meter	61.2 kg	79574	50 Roll
DEA0020845	ES4CIB-1.2X10-M			10 Meter	122.4 kg	159148	50 Roll

ELECTRICAL SAFETY PRODUCTS

ARC Flash Protection Products - 8 Cal/Cm2



- **Inherent Flame-Retardant material**
- Fabric Composition: 49% Modacrylic, 45% Cellulose, 5% Para-Aramid, 1% Anti -Static
- The fiber's inherent arc thermal performance value is decided by its molecular structure. The fiber will not be burned inherently. Its flame resistance comes from the fiber itself instead of the chemicals on the surface. Thus, the permanent flame-resistant performance will not be washed out or worn away.
- Durable. with a long life, its inherent permanent protection will not degrade by washing or wearing.
- More breathable & comfortable
- Tested: ASTM F2621/F2621M-22
- ATPV Rating: 8 Cal/cm2
- Meets the NFPA70E- HRC 2
- Lightweight: 240 g/m2
- Daily workwear designed for intensive use is essential for electricians to protect against ARC Flash hazards encountered during the Installation, Operation, and maintenance of electrical equipment

Arc Flash Clothing-IFR-8 Cal/Cm2 -Jacket -Bi-Colour Orange And Blue With Reflective

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031010	ESAF8J-OB-R-S	Orange & Blue With Reflective	S	10080
DEA0031011	ESAF8J-OB-R-M		M	10080
DEA0031012	ESAF8J-OB-R-L		L	10080
DEA0031013	ESAF8J-OB-R-XL		XL	10080
DEA0031014	ESAF8J-OB-R-XXL		XXL	10080
DEA0031033	ESAF8J-OB-R-3XL		3XL	10080

Arc Flash Clothing-IFR-8 Cal/Cm2 -Jacket -Blue With Reflective

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031028	ESAF8J-B-R-S	Blue With Reflective	S	10080
DEA0031029	ESAF8J-B-R-M		M	10080
DEA0031030	ESAF8J-B-R-L		L	10080
DEA0031031	ESAF8J-B-R-XL		XL	10080
DEA0031032	ESAF8J-B-R-XXL		XXL	10080
DEA0031048	ESAF8J-B-R-3XL		3XL	10080

Arc Flash Clothing-IFR-8 Cal/Cm2 -Shirt-Blue

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031061	ESAF8S-B-S	Blue	S	8208
DEA0031062	ESAF8S-B-M		M	8208
DEA0031063	ESAF8S-B-L		L	8208
DEA0031064	ESAF8S-B-XL		XL	8208
DEA0031065	ESAF8S-B-XXL		XXL	8208
DEA0031066	ESAF8S-B-3XL		3XL	8208

ELECTRICAL SAFETY PRODUCTS

Arc Flash Clothing-IFR-8 Cal/Cm2 -Pant -Blue With Reflective

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031015	ESAF8P-B-R-S	Blue With Reflective	S	6192
DEA0031016	ESAF8P-B-R-M		M	6192
DEA0031017	ESAF8P-B-R-L		L	6192
DEA0031018	ESAF8P-B-R-XL		XL	6192
DEA0031019	ESAF8P-B-R-XXL		XXL	6192
DEA0031034	ESAF8P-B-R-3XL		3XL	6192

Arc Flash Clothing-IFR-8 Cal/Cm2 -Pant -Blue

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031067	ESAF8P-B-S	Blue	S	5760
DEA0031068	ESAF8P-B-M		M	5760
DEA0031069	ESAF8P-B-L		L	5760
DEA0031070	ESAF8P-B-XL		XL	5760
DEA0031071	ESAF8P-B-XXL		XXL	5760
DEA0031072	ESAF8P-B-3XL		3XL	5760



Arc Flash Kit -IFR-8 Cal/Cm2 - HRC 2-Jacket, Pant, Hood With Helmet, Safety Glass, And Storage Bag -Colour - Blue

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031093	ESKJP8-S	Blue	S	47376
DEA0031094	ESKJP8-M		M	47376
DEA0031095	ESKJP8-L		L	47376
DEA0031096	ESKJP8-XL		XL	47376
DEA0031097	ESKJP8-XXL		XXL	47376
DEA0031098	ESKJP8-3XL		3XL	47376



Arc Flash Kit -IFR-8 Cal/Cm2 - HRC 2-Shirt, Pant, Hood With Helmet, Safety Glass, And Storage Bag -Colour - Blue

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031114	ESKSP8-S	Blue	S	45072
DEA0031115	ESKSP8-M		M	45072
DEA0031116	ESKSP8-L		L	45072
DEA0031117	ESKSP8-XL		XL	45072
DEA0031118	ESKSP8-XXL		XXL	45072
DEA0031119	ESKSP8-3XL		3XL	45072



Arc Flash Protection Face Shield - 13 Cal/Cm2

PCN	Product Code	Size	List Price (INR) Per Nos.
EBASAE1002	ESFS14C	Without Hard Hat	17280
EBASAE1003	ESFS14C-HAT	With Hard Hat	21600
DEA0031112	ESFK12	ARC FLASH FACE SHIELD- 12 Cal/cm2 -WITH CLIP + CLASS E HELMET + BALACLAVA	28800
DEA0031111	ESAFH10	Balaclava 12 Cal/Cm2	7632

ELECTRICAL SAFETY PRODUCTS

ARC Flash Protection Products - 8 Cal/Cm2



- Arc Flash Resistance Material
- Fabric Composition: 88% Long Staple Cotton & 12% High Tenacity Nylon
- Offers enhanced protection from electric arc and flash fire exposures
- More breathable & comfortable
- Tested: ASTM F2621/F2621M-22
- ATPV Rating: 8 Cal/cm2
- Meets the NFPA70E- HRC 2
- Lightweight: 240 g/m2
- Daily workwear designed for intensive use is essential for electricians to protect against ARC Flash hazards encountered during the Installation, Operation, and maintenance of electrical equipment

Arc Flash Clothing-8 Cal/Cm2 -Jacket -Blue

PCN	Product Code	Color	Size	List Price (INR) Per PC
EBASAA1042	ESAF8J-B-S	Blue With Reflective	S	6192
EBASAA1040	ESAF8J-B-M		M	6192
EBASAA1043	ESAF8J-B-L		L	6192
EBASAA1044	ESAF8J-B-XL		XL	6192
EBASAA1045	ESAF8J-B-XXL		XXL	6192
EBASAA1037	ESAF8J-B-3XL		3XL	6192

Arc Flash Clothing-8 Cal/Cm2 -Pant -Blue

PCN	Product Code	Color	Size	List Price (INR) Per PC
EBASAB1033	ESAF8P-B-S	Blue With Reflective	S	4032
EBASAB1032	ESAF8P-B-M		M	4032
EBASAB1030	ESAF8P-B-L		L	4032
EBASAB1035	ESAF8P-B-XL		XL	4032
EBASAB1036	ESAF8P-B-XXL		XXL	4032
EBASAB1038	ESAF8P-B-3XL		3XL	4032

Arc Flash Kit -8 Cal/Cm2 - HRC 2-Jacket, Pant, Face Shield With Helmet, Safety Glass, And Storage Bag -Colour - Blue



PCN	Product Code	Color	Size	List Price (INR) Per PC
EBASAD1010	ESK8-S	Blue	S	41184
EBASAD1011	ESK8-M		M	41184
EBASAD1008	ESK8-L		L	41184
EBASAD1015	ESK8-XL		XL	41184
EBASAD1016	ESK8-XXL		XXL	41184
EBASAD1012	ESK8-3XL		3XL	41184

ELECTRICAL SAFETY PRODUCTS

ARC Flash Protection Products - IFR - 12 Cal/Cm2



- Inherent Flame-Retardant material
- Fabric Composition: 49% Modacrylic, 45% Cellulose, 5% Para-Aramid, 1% Anti -Static
- The fiber's inherent arc thermal performance value is decided by its molecular structure. The fiber will not be burned inherently
- Its flame resistance comes from the fiber itself instead of the chemicals on the surface. Thus, the permanent flame-resistant performance will not be washed out or worn away.
- Durable with a long life, its inherent permanent protection will not degrade by washing or wearing
- More breathable & comfortable
- Tested: ASTM F2621/F2621M-22
- ATPV Rating: 12 Cal/Cm2
- Meets the NFPA70E- HRC 2
- Lightweight: 240 g/m2
- Daily workwear designed for intensive use is essential for electricians to protect against ARC Flash hazards encountered during the Installation, Operation, and maintenance of electrical equipment

Arc Flash Clothing-IFR-12 Cal/Cm2 -Jacket -Bi-Colour - Orange And Blue With Reflective

PCN	Product Code	Color	Size	List Price (INR) Per PC
DEA0031038	ESAF12J-OB-R-S	Orange & Blue With Reflective	S	10224
DEA0031039	ESAF12J-OB-R-M		M	10224
DEA0031040	ESAF12J-OB-R-L		L	10224
DEA0031041	ESAF12J-OB-R-XL		XL	10224
DEA0031042	ESAF12J-OB-R-XXL		XXL	10224
DEA0031121	ESAF12J-OB-R-3XL		3XL	10224

Arc Flash Clothing-IFR-12 Cal/Cm2 -Jacket -Blue With Reflective

PCN	Product Code	Color	Size	List Price (INR) Per PC
DEA0031132	ESAF12J-B-R-S	Blue With Reflective	S	9792
DEA0031133	ESAF12J-B-R-M		M	9792
DEA0031134	ESAF12J-B-R-L		L	9792
DEA0031135	ESAF12J-B-R-XL		XL	9792
DEA0031136	ESAF12J-B-R-XXL		XXL	9792
DEA0031137	ESAF12J-B-R-3XL		3XL	9792

Arc Flash Clothing-IFR-12 Cal/Cm2 -Jacket -Blue With Reflective

PCN	Product Code	Color	Size	List Price (INR) Per PC
DEA0031043	ESAF12P-B-R-S	Blue With Reflective	S	7632
DEA0031044	ESAF12P-B-R-M		M	7632
DEA0031045	ESAF12P-B-R-L		L	7632
DEA0031046	ESAF12P-B-R-XL		XL	7632
DEA0031047	ESAF12P-B-R-XXL		XXL	7632
DEA0031122	ESAF12P-B-R-3XL		3XL	7632

ELECTRICAL SAFETY PRODUCTS



Arc Flash Kit - IFR-12 Cal/Cm2 - HRC 2-Shirt, Pant, Hood With Helmet, Safety Glass, And Storage Bag - Colour - Blue

PCN	Product Code	Color	Size	List Price (INR) Per PC
EBASAD1002	ESKJP12-S	Blue	S	48528
EBASAD1003	ESKJP12-M		M	48528
EBASAD1004	ESKJP12-L		L	48528
EBASAD1005	ESKJP12-XL		XL	48528
EBASAD1006	ESKJP12-XXL		XXL	48528
EBASAD1007	ESKJP12-3XL		3XL	48528



Arc Flash Kit - IFR-12 Cal/Cm2 - HRC 2-Shirt, Pant, Hood With Helmet, Safety Glass, And Storage Bag - Colour - Blue

PCN	Product Code	Description	List Price (INR) Per PC
DEA0031123	ESAFG12	Arc Flash Glove	4274

ELECTRICAL SAFETY PRODUCTS

ARC Flash Protection Products - 12 Cal/Cm2



- Arc Flash Resistance Material
- Fabric Composition: 88% Long Staple Cotton & 12% High Tenacity Nylon
- Offers enhanced protection from electric arc and flash fire exposures
- More breathable & comfortable
- Tested: ASTM F2621/F2621M-22
- ATPV Rating: 12 Cal/Cm2
- Meets the NFPA70E- HRC 2
- Lightweight: 320 g/m2
- Daily workwear designed for intensive use is essential for electricians to protect against ARC Flash hazards encountered during the Installation, Operation, and maintenance of electrical equipment

Arc Flash Clothing-12 Cal/Cm2 -Jacket -Blue

PCN	Product Code	Color	Size	List Price (INR) Per PC
EBASAA1051	ESAF12J-B-S	Blue With Reflective	S	7200
EBASAA1038	ESAF12J-B-M		M	7200
EBASAA1046	ESAF12J-B-L		L	7200
EBASAA1052	ESAF12J-B-XL		XL	7200
EBASAA1047	ESAF12J-B-XXL		XXL	7200
EBASAA1053	ESAF12J-B-3XL		3XL	7200

Arc Flash Clothing-12 Cal/Cm2 -Pant -Blue

PCN	Product Code	Color	Size	List Price (INR) Per PC
EBASAB1034	ESAF12P-B-S	Blue With Reflective	S	4464
EBASAB1039	ESAF12P-B-M		M	4464
EBASAB1040	ESAF12P-B-L		L	4464
EBASAB1041	ESAF12P-B-XL		XL	4464
EBASAB1042	ESAF12P-B-XXL		XXL	4464
EBASAB1031	ESAF12P-B-3XL		3XL	4464

Arc Flash Kit -12 Cal/Cm2 - HRC 2-Jacket, Pant, Face Shield with Helmet, Safety Glass, And Storage Bag -Colour - Blue



PCN	Product code	Color	Size	List Price (INR) Per PC
EBASAD1017	ESK12-S	Blue	S	42624
EBASAD1013	ESK12-M		M	42624
EBASAD1018	ESK12-L		L	42624
EBASAD1009	ESK12-XL		XL	42624
EBASAD1014	ESK12-XXL		XXL	42624
EBASAD1019	ESK12-3XL		3XL	42624

ELECTRICAL SAFETY PRODUCTS

ARC Flash Protection Products - 25 Cal/cm2

The Kamfet ESK-25 Arc Flash Protection Kit is engineered to deliver maximum protection, comfort, and mobility for electrical professionals working in high-energy environments. It is rated at 25 Cal/cm², meets Category 3 PPE requirements, and exceeds international safety standards.



Superior Protection:

- Arc Thermal Performance Value (ATPV): 25 Cal/cm² – Category 3 PPE
- 100% Inherent FR Fabric: Engineered blend of Modacrylic, Meta-Aramid, Para-Aramid, Anti-static fibres, and Lenzing FR

Ergonomic Design & Comfort :

- Lightweight and breathable construction
- Optimised for a tailored fit, mobility, and all-day comfort
- Adjustable suspenders, elastic waist, and contoured cuts
- Covered zippers and storm flaps for added protection
- Flame-resistant Velcro® and high-durability closures
- Modernised sporty design for a professional appearance

High-Visibility Arc Flash Face Hood :

- Next-gen clear lens technology for enhanced color perception and reduced eye fatigue
- 25 Cal-rated anti-fog, anti-scratch face shield
- Ergonomic hood with integrated hard hat compatibility

Certifications and compliance:

- NFPA 70E – Electrical Safety in the Workplace
- ASTM F1506 – Flame Resistant and Arc-Rated Protective Clothing
- ASTM F2178 – Arc Rating for Face and Eye Protection
- ASTM F2621 – Evaluation of Finished Product Arc Response
- IEC 61482-2 – Protective Clothing Against the Thermal Hazards of an Electric ARC

25 Cal/cm2 ARC Flash Protection Kit

PCN	Product Code	Size	Product Discription	Image	List Price (INR) Per PC
DEA0031085	ESK25-S	S	25 Cal/cm ² ARC Flash Protection Kit Contains • Jacket • BIB Overalls • ARC Flash Hood • Class E Helmet • Safety Eyewear • Storage Bag		80640
DEA0031086	ESK25-M	M			80640
DEA0031087	ESK25-L	L			80640
DEA0031088	ESK25-XL	XL			80640
DEA0031089	ESK25-XXL	XXL			80640
DEA0031090	ESK25-3XL	3XL			80640

25 Cal/cm2 ARC Flash Protection - Jacket

PCN	Product Code	Size	Product Discription	Image	List Price (INR) Per PC
DEA0031073	ESAF25J-B-S	S	• Next Gen Collar Design: Enhances fit and adds a touch of modern style • Durable Zip with Snap Button Closure: Ensures secure fastening and long-lasting wear • Knitted Cuffs: Provide a snug fit around the wrists to keep out dust and wind. • Fold-Over Hem: Creates a neat and professional bottom finish. • Concealed Inner Seams: Deliver a smooth and tidy interior, reducing irritation. • Set-In Sleeves: Allow natural arm movement for all-day comfort. • Dark Fabric Color: Effectively conceals stains, maintaining a cleaner appearance. • Available Sizes : S to 3XL for a broad and inclusive fit range.		23616
DEA0031074	ESAF25J-B-M	M			23616
DEA0031075	ESAF25J-B-L	L			23616
DEA0031076	ESAF25J-B-XL	XL			23616
DEA0031077	ESAF25J-B-XXL	XXL			23616
DEA0031078	ESAF25J-B-3XL	3XL			23616

ELECTRICAL SAFETY PRODUCTS

25 Cal/Cm2 ARC Flash Protection - Pant

PCN	Product Code	Size	Product Discription	Image	List Price (INR) Per PC
DEA0031079	ES AFC25P-B-S	S	• Neat Finish: Concealed seams for a clean, professional look inside and out • Easy Donning: Closed suspenders without buckles allow single-person use • Waist Adjustment: Waist gore with tab ensures a flexible and secure fit • Bottom Extension: Gore with two tabs allows donning over shoes • Smooth Interior: Inside finish with hidden seams for comfort and appearance • Dark Color: Minimizes visible stains, stays presentable longer • Size Range: Available from S to 3XL for optimal fit		19296
DEA0031080	ES AFC25P-B-M	M			19296
DEA0031081	ES AFC25P-B-L	L			19296
DEA0031082	ES AFC25P-B-XL	XL			19296
DEA0031083	ES AFC25P-B-XXL	XXL			19296
DEA0031084	ES AFC25P-B-3XL	3XL			19296

25 Cal/Cm2 ARC Flash Protection- ARC Flash Hood

PCN	Product Code	Size	Product Discription	Image	List Price (INR) Per PC
DEA0031091	ES AFC25H-B	Universal	• High Arc Flash Protection: Visor rated for 25 Cal/cm² are flash protection • Ergonomic Design: Round cut U-shape at shoulders for enhanced shoulder mobility • Wide Field of View: Clear visor offering maximum peripheral visibility • Low-Maintenance Fabric: Dark-colored fabric resists visible soiling and staining, maintaining a clean appearance over time • Universal Fit: Designed to suit a wide range of users and applications		45360

25 Cal/Cm2 ARC Flash Protection- Hand Gloves

PCN	Product Code	Size	Product Discription	Image	List Price (INR) Per PC
DEA0031124	ES AFG25	Universal	• High Arc Flash Protection: Provides up to 25 Cal/cm², ideal for high-risk environments • Inherent Flame Resistance: Crafted from durable, flame-resistant materials • Ergonomic Design: Ensures comfort and flexibility for unrestricted movement. • Universal Fit: Designed to fit most sizes • Safety Compliance: Tested to meet ASTM F2675 / F2675M-19 standards		7326

ELECTRICAL SAFETY PRODUCTS

ARC Flash Protection Products - 40 Cal/Cm2

The Kamfet ESK-40 Arc Flash Protection Kit is engineered to deliver maximum protection, comfort, and mobility for electrical professionals working in high-energy environments. It is rated at 40 Cal/cm², meets Category 4 PPE requirements, and exceeds international safety standards.

With Raychem RPG's long-standing expertise in arc flash protection and a deep understanding of on-ground needs, this next-generation arc flash kit redefines comfort, style, and performance. The breathable fabric, optimal fit, and advanced protection system create a professional solution.

Feel the difference. Wear the future of arc flash protection.



Superior Protection:

- Arc Thermal Performance Value (ATPV): 40 Cal/cm² – Category 4 PPE
- 100% Inherent FR Fabric: Engineered blend of Modacrylic, Meta-Aramid, Para-Aramid, Anti-static fibres, and Lenzing FR

Ergonomic Design & Comfort :

- Lightweight and breathable construction
- Optimised for a tailored fit, mobility, and all-day comfort
- Adjustable suspenders, elastic waist, and contoured cuts
- Covered zippers and storm flaps for added protection
- Flame-resistant Velcro® and high-durability closures
- Modernised sporty design for a professional appearance

High-Visibility Arc Flash Face Hood :

- Next-gen clear lens technology for enhanced color perception and reduced eye fatigue
- 40 Cal-rated anti-fog, anti-scratch face shield
- Ergonomic hood with integrated hard hat compatibility

Certifications and compliance:

- NFPA 70E – Electrical Safety in the Workplace
- ASTM F1506 – Flame Resistant and Arc-Rated Protective Clothing
- ASTM F2178 – Arc Rating for Face and Eye Protection
- ASTM F2621 – Evaluation of Finished Product Arc Response
- IEC 61482-2 – Protective Clothing Against the Thermal Hazards of an Electric ARC

40 Cal/Cm2 ARC Flash Protection Kit

PCN	Product Code	Size	Product Discription	Image	List Price (INR) Per PC
DEA0031049	ESK40-S	S	40 Cal/cm ² ARC Flash Protection Kit Contains • Jacket • BIB Overalls • ARC Flash Hood • Class E Helmet • Safety Eyewear • Storage Bag		100080
DEA0031050	ESK40-M	M			100080
DEA0031051	ESK40-L	L			100080
DEA0031052	ESK40-XL	XL			100080
DEA0031053	ESK40-XXL	XXL			100080
DEA0031054	ESK40-3XL	3XL			100080

40 Cal/Cm2 ARC Flash Protection - Jacket

PCN	Product Code	Size	Product Discription	Image	List Price (INR) Per PC
DEA0031099	ES AFC40J-B-S	S	• Next Gen Collar Design - Enhances fit and adds a touch of modern style • Durable Zip with Snap Button Closure- Ensures secure fastening and long-lasting wear • Knitted Cuffs - Provide a snug fit around the wrists to keep out dust and wind • Self-Folded Placket - Offers a clean, structured look without extra stitching • Fold-Over Hem - Creates a neat and professional bottom finish • Concealed Inner Seams - Deliver a smooth and tidy interior, reducing irritation • Set-In Sleeves - Allow natural arm movement for all-day comfort • Dark Fabric Color - Effectively conceals stains, maintaining a cleaner appearance • Available Sizes - S to XXL for a broad and inclusive fit range		31104
DEA0031100	ES AFC40J-B-M	M			31104
DEA0031101	ES AFC40J-B-L	L			31104
DEA0031102	ES AFC40J-B-XL	XL			31104
DEA0031103	ES AFC40J-B-XXL	XXL			31104
DEA0031104	ES AFC40J-B-3XL	3XL			31104

ELECTRICAL SAFETY PRODUCTS

40 Cal/Cm2 ARC Flash Protection - BIB Overall

PCN	Product Code	Size	Product Discription	Image	List Price (INR) Per PC
DEA0031105	ES AFC40B-B-S	S	• Neat Finish: Concealed seams for a clean, professional look inside and out • Easy Donning: Closed suspenders without buckles allow single-person use • Waist Adjustment: Waist gore with tab ensures a flexible and secure fit • Bottom Extension: Gore with two tabs allows donning over shoes • Smooth Interior: Inside finish with hidden seams for comfort and appearance • Dark Color: Minimizes visible stains, stays presentable longer • Size Range: Available from S to 3XL for optimal fit		26064
DEA0031106	ES AFC40B-B-M	M			26064
DEA0031107	ES AFC40B-B-L	L			26064
DEA0031108	ES AFC40B-B-XL	XL			26064
DEA0031109	ES AFC40B-B-XXL	XXL			26064
DEA0031110	ES AFC40B-B-3XL	3XL			26064

40 Cal/Cm2 ARC Flash Protection- ARC Flash Hood

PCN	Product Code	Size	Product Discription	Image	List Price (INR) Per PC
DEA0031092	ES AFC40H-B	Universal	• High Arc Flash Protection: Visor rated for 40 Cal/cm² arc flash protection • Ergonomic Design: Round cut U-shape at shoulders for enhanced shoulder mobility • Wide Field of View: Clear visor offering maximum peripheral visibility • Low-Maintenance Fabric: Dark-colored fabric resists visible soiling and staining, maintaining a clean appearance over time • Universal Fit: Designed to suit a wide range of users and applications		47520

40 Cal/Cm2 ARC Flash Protection- Hand Gloves

PCN	Product Code	Size	Product Discription	Image	List Price (INR) Per PC
DEA0031125	ES AFG40	Universal	• High Arc Flash Protection: Provides up to 40 Cal/cm², ideal for high-risk environments • Inherent Flame Resistance: Crafted from durable, flame-resistant materials • Ergonomic Design: Ensures comfort and flexibility for unrestricted movement. • Universal Fit: Designed to fit most sizes • Safety Compliance: Tested to meet ASTM F2675 / F2675M-19 standards		10380

ELECTRICAL SAFETY PRODUCTS

Insulating Mats - IS 15652:2006

Kamfet Electrical Insulating Matting is engineered to provide optimal safety and protection against electric shocks for operators and maintenance personnel working in low and high-voltage environments. Manufactured to comply with IS 15652:2006 standards, these mats deliver exceptional insulation performance, durability, and reliability.



- **Dual Colour Technology:** The dual-layer design features two colors, enabling easy detection of mechanical damage. Visible color changes on the surface indicate the need for replacement
- **High Dielectric Strength:** Designed to withstand high voltages, providing excellent insulation. Tested as per IS 15652:2006
- **Flame Retardant:** Fire will not propagate in case of a flammable liquid spill or spark. Complies with IS 15652:2006 Clause C-5.1
- **100% Virgin Material:** Ensures extended durability and reliable performance
- **UV Stabilized:** Resistant to degradation caused by sunlight exposure
- **Anti-Skid Surface:** Textured surface enhances grip, reducing slip risks"

PCN	Product Code	Class	Thickness in MM	Color	Rolls Size		Image	List Price (INR) Per PC
					Width	Length		
EBASBJ1006	ESIMBLO-A-1X2	CLASS A	2	BLACK ON TOP AND ORANGE ON BOTTOM	1	2		5624
EBASBJ1001	ESIMBLO-A-1X10	CLASS A	2		1	10		28124
EBASBK1007	ESIMBLO-B-1X2	CLASS B	2.5		1	2		6880
EBASBK1002	ESIMBLO-B-1X10	CLASS B	2.5		1	10		34398
EBASBL1009	ESIMBLO-C-1X2	CLASS C	3		1	2		8618
EBASBL1003	ESIMBLO-C-1X10	CLASS C	3	BLUE ON TOP AND ORANGE ON BOTTOM	1	10		43092
EBASBJ1007	ESIMBO-A-1X2	CLASS A	2		1	2		5624
EBASBJ1004	ESIMBO-A-1X10	CLASS A	2		1	10		28124
EBASBK1006	ESIMBO-B-1X2	CLASS B	2.5		1	2		6880
EBASBK1005	ESIMBO-B-1X10	CLASS B	2.5		1	10		34398
EBASBL1010	ESIMBO-C-1X2	CLASS C	3	GREY ON TOP AND ORANGE ON BOTTOM	1	2		8618
EBASBL1007	ESIMBO-C-1X10	CLASS C	3		1	10		43092
EBASBL1008	ESIMGO-C-1X2	CLASS C	3		1	2		8618
EBASBL1005	ESIMGO-C-1X10	CLASS C	3		1	10		43092

ELECTRICAL SAFETY PRODUCTS

Insulated Rescure Hook



Kamfet Insulated Rescue Hook is a critical safety tool designed to rescue personnel from electrically hazardous areas without endangering the rescuer. Constructed with high-dielectric, non-conductive materials, it is suitable for use in electrical substations, industrial environments, utility services, and confined spaces. The robust hook and insulated shaft ensure quick and safe withdrawal of victims from arc flash or electric shock zones.

Kamfet Insulated Rescue Hook features a foam-filled, fibreglass-reinforced handle for superior electrical insulation and a coated, epoxy coated hook with an 18" opening.

Kamfet Insulated Rescue Hook protects the rescuer from electrical hazards while maintaining a safe distance when positioning the rescue hook around the torso or under the arms to remove the injured worker.

- **Insulated Design:** Prevents direct contact with the victim, protecting the rescuer from electrical hazards
- **High Voltage Rating:** Insulation tested up to 100 kv
- **Non-Conductive Shaft:** Foam-filled fibreglass-reinforced plastic (FRP) handle offers superior insulation
- **Robust Hook Design:** Epoxy-coated Hook with 18" opening
- **Curved Hook:** Designed for a secure grip on the victim's body, clothing, or safety harness
- **Lightweight & Durable:** Weighs approximately 2.1 kg, ensuring easy handling and deployment
- **Lengths Available:** Standard 6 ft (1.65 m), Optional 3 ft & 8 ft models

Ordering Code	Product Code	Length in feet	Weight in KG	List Price (INR) Per PC
EBAISR1001	ESRH-3	3	1.6	15120
EBAISR1002	ESRH-6	6	2.1	21320
EBAISR1003	ESRH-8	8	2.6	26762

Note: Material will be available from - 1st Oct 2025



ELECTRICAL SAFETY PRODUCTS

Static Discharge Stick



A Static Discharge Stick is a safety tool designed to safely release residual electrical energy from de-energised high and medium-voltage equipment. This includes systems such as capacitors and switchgear, which can retain hazardous charges even after the power is turned off. The primary purpose of the discharge stick is to protect maintenance personnel from electrical shocks by safely redirecting any remaining charge to the ground before work begins.

These sticks are typically made from high-dielectric insulating materials, like fibreglass, to ensure maximum safety. One end of the stick features a metal hook or clamp for attaching to the charged equipment, while the other end is connected to a grounding cable that links to a secure earth point. The discharge stick ensures the equipment is safe to handle during servicing or inspection by providing a controlled route for the static charge to dissipate.

- Foam-filled FRP stick for superior electrical insulation
- Electrolytic-grade copper hook for high conductivity
- TPE-coated copper cable
- Textured finish for better grip
- Cross-dimensional yarn for enhanced mechanical strength and durability
- Heavy-duty grounding clamp
- Insulation tested up to 3100 kv
- Bright orange colour for high visibility

Ordering Code	Product Code	Stick Length in feet	Cable Length in Meter	Stick Weight in KG	List Price (INR) Per PC
EBAISG1001	ESDS-62S	6	2.5	3.6	31298
EBAISG1002	ESDS-65S	6	5	3.6	37800
EBAISG1003	ESDS-67S	6	7	3.6	45360
EBAISG1004	ESDS-610S	6	10	3.6	54432

Note: Material will be available from - 1st Oct 2025



Service Offering and Installation

Your Trusted Partner



SERVICE OFFERINGS & INSTALLATION

Low Voltage Cable Accessories - Cold Applied Joint Kit

Straight Through Joint

Model	Connector Type	Aluminium Crimping Type	
	No. of Cable Core	3.5 Core	4 Core
	Cable Size (Sq. mm)	Installation Charge	
RVSJ-C1 - C6	25 - 400	2220	2915
	Connector Type	Mechanical Type	
RVSJ-M1 - M4	25 - 400	2220	2915

Model	Earthing Braid Material	Aluminium	Tin Platted Copper
	No. of Cable Core	3.5 Core	4 Core
	Cable Size (Sq. mm)	Installation Charge	
RLVJ - S0 - S6	6 - 400	2220	2915

Low Voltage Cable Accessories - Heat Shrinkable Joint Kit

Straight Through Joint

Model	No. of Cable Core	3.5 Core	4 Core
	Cable Size (Sq. mm)	Installation Charge	
EPKJ	2.5 - 630	2220	2915
SFKJ	4 - 500	2220	2915
ECKJ	2 to 75	3740	3740

Medium Voltage Cable Accessories - Indoor and Outdoor Heat Shrinkable Termination Kit

Indoor / Outdoor 11kV Termination Kit

Model	No. of Cable Core Cable Size (Sq. mm)	No. of Cable Core Cable Size (Sq. mm)	1 Core Cable		3 Core Cable	
			Service PCN	Installation Charge	Service PCN	Installation Charge
Indoor Termination	EPKT-S	35 to 1000	SI995469AT	3335	SI995469AW	5555
	EPKT-C		SI995469AT		SI995469AW	
	HVT-M		SI995469AT		SI995469AW	
	HST-L		SI995469AT		SI995469AW	
Outdoor Termination	EPKT-S	35 to 1000	SI995469AT	3335	SI995469AW	5555
	EPKT-C		SI995469AT		SI995469AW	
	HVT-M		SI995469AT		SI995469AW	
	HST-L		SI995469AT		SI995469AW	

Indoor / Outdoor 22kV Termination Kit

Termination Type	Model	Cable Size (Sq. mm)	1 Core Cable		3 Core Cable	
			Service PCN	Installation Charge	Service PCN	Installation Charge
Indoor Termination	EPKT-S	35 to 1000	To be created	3335	To be created	5555
	EPKT-C		To be created		To be created	
	HVT-M		To be created		To be created	
Outdoor Termination	EPKT-S	35 to 1000	To be created	3335	To be created	5555
	EPKT-C		To be created		To be created	
	HVT-M		To be created		To be created	

(*) Installation Charges - Kindly refer to Terms & Conditions and Inclusion & Exclusion applicable for Installation Charges

SERVICE OFFERINGS & INSTALLATION

Medium Voltage Cable Accessories - Indoor and Outdoor Heat Shrinkable Termination Kit Indoor / Outdoor 33kV Termination Kit

Termination Type	Model	Cable Size (Sq. mm)	1 Core Cable		3 Core Cable	
			Service PCN	Installation Charge	Service PCN	Installation Charge
Indoor Termination	EPKT-S	35 to 1000	To be created	3335	To be created	5555
	EPKT-C		To be created		To be created	
	HVT-M		To be created		To be created	
Outdoor Termination	EPKT-S	35 to 1000	To be created	3335	To be created	5555
	EPKT-C		To be created		To be created	
	HVT-M		To be created		To be created	

Medium Voltage Cable Accessories - Straight Through Heat Shrinkable Joint Kit 11kV Straight Through Joint Kit

Joint Type	Model	Cable Size (Sq. mm)	1 Core Cable		3 Core Cable	
			Service PCN	Installation Charge	Service PCN	Installation Charge
Straight through Joint	EPKJ-S	35 to 1000	SI995469AS	3335	SI995469AV	5555
	EPKJ-C	35 to 1000				
	HVS-X-M	35 to 1000				
	HSJ-L	35 to 1000				
	MXSW	25 to 1000				

22kV Straight Through Joint Kit

Joint Type	Model	Cable Size (Sq. mm)	1 Core Cable		3 Core Cable	
			Service PCN	Installation Charge	Service PCN	Installation Charge
Straight through Joint	EPKJ-S	35 to 1000	To Be Created	3335	To Be Created	5555
	EPKJ-C					
	HVCJ-M					
	MXSW					

33kV Straight Through Joint Kit

Joint Type	Model	Cable Size (Sq. mm)	1 Core Cable		3 Core Cable	
			Service PCN	Installation Charge	Service PCN	Installation Charge
Straight through Joint	EPKJ-S	35 to 1000	SI995469AY	7055	SI995469AAB	12476
	EPKJ-C					
	HVCJ-M					
	MXSW					

(*) Installation Charges - Kindly refer to Terms & Conditions and Inclusion & Exclusion applicable for Installation Charges

SERVICE OFFERINGS & INSTALLATION

Medium Voltage Cable Accessories - Switchgear Plug-in Termination

11 KV Switchgear Outer Cone Termination

Connector Type	Model	Cable Size (Sq. mm)	Max. Current (Amp)	Cable Insulation Diameter Range (in mm)	3 Core Cable	
					Installation Charge	Installation Charge
Front Connectors Type C Bushing	ELBC	35- 400	800A	13.5-37.5	4118	12500
Front Connectors Type C Bushing	RSTI	35- 800	800A - 1250A	13.5-37.5	4990	12500
Rear (Coupling) Connectors Type C Bushing	ELBC	35- 400	800A	13.5-37.5	4118	12500
Rear (Coupling) Connectors Type C Bushing	RSTI	35- 800	800A - 1250A	13.5-37.5	4990	12500

22 KV Switchgear Outer Cone Termination

Connector Type	Model	Cable Size (Sq. mm)	Max. Current (Amp)	Cable Insulation Diameter Range (in mm)	3 Core Cable	
					Installation Charge	Installation Charge
Front Connectors Type C Bushing	ELBC	35- 800	800A - 1250A	17.0-37.5	4118	12500
Front Connectors Type C Bushing	RSTI	35- 800	800A - 1250A	12.7-59.0	4990	12500
Rear (Coupling) Connectors Type C Bushing	ELBC	35- 800	800A - 1250A	17.0-52.0	4118	12500
Rear (Coupling) Connectors Type C Bushing	RSTI	35- 800	800A - 1250A	12.7-59.0	4990	12500

33 KV Switchgear Outer Cone Termination

Connector Type	Model	Cable Size (Sq. mm)	Max. Current (Amp)	Cable Insulation Diameter Range (in mm)	3 Core Cable	
					Installation Charge	Installation Charge
Front Connectors Type C Bushing	ELBC	35- 800	800A - 1250A	24.5-59.0	4446	11110
Front Connectors Type C Bushing	RSTI	35- 800	800A - 1250A	22.4-59	7476	16665
Rear (Coupling) Connectors Type C Bushing	ELBC	35- 800	800A	24.5-59.0	4446	11110
Rear (Coupling) Connectors Type C Bushing	RSTI	35- 800	800A - 1250A	24.5-59.0	7476	16665

Switchgear Inner Cone Termination

Connector Type	System Voltage (kV)	Size of Bushing	Current (Amp)	Insulation Diameter Range (in mm)	Installation Charge
RPIT	up to 36kV	Size - 2	800	19.5 - 42	Available on request
	up to 42kV	Size - 3	1250	26 - 50	Available on request
Trifurcation Kit	up to 42kV	Size - 2/3	-	-	Available on request

(*) Installation Charges - Kindly refer to Terms & Conditions and Inclusion & Exclusion applicable for Installation Charges

SERVICE OFFERINGS & INSTALLATION

66KV Cable Accessories - Single Core Cable

Model	Type	Cable Size in Sq.mm.	Service PCN	Installation Charge
IHVT	Indoor Termination	Upto 1200	SI995469AAF	17765
OHVT	Outdoor Termination		SI995469AAF	17765
EHVS	Straight Joint		SI995469AAE	17765
PHVS/PHVT	GIS Termination		SI995469AAG	41665
OHVT-C	Oil Fill Outdoor Termination		SI995469AAL	88890

66KV Cable Accessories - Three Core Cable

Model	Type	Cable Size in Sq.mm.	Service PCN	Installation Charge
IHVT	Indoor Termination	Upto 3 Core X 300	SI995469AAI	55835
OHVT	Outdoor Termination		SI995469AAI	55835
EHVS	Straight Joint		SI995469AAH	55835
PHVS/PHVT	GIS Termination		SI995469AAJ	55835
OHVT-C	Oil Fill Outdoor Termination		SI995469AAL	223090

110KV / 132KV Extra High Voltage Cable Accessories - Single Core Cable

Model	Type	Cable Size in Sq.mm.	Service PCN	Installation Charge
OHVT-C	Oil Fill Outdoor Termination	Upto 3 Core X 300	SI995469AAL	88890
PHVS/PHVT	GIS Termination		SI995469AAM	88890
EHVS	Straight Joint		SI995469AAK	88890

220KV Extra High Voltage Cable Accessories - Single Core Cable

Model	Type	Cable Size in Sq.mm.	Service PCN	Installation Charge
OHVT-C	Oil Fill Outdoor Termination	Upto 2500	SI995469AAO	145835
PHVS/PHVT	GIS Termination		SI995469AAP	145835
EHVS	Straight Joint		SI995469AAN	145835

(*) Installation Charges - Kindly refer to Terms & Conditions and Inclusion & Exclusion applicable for Installation Charges

INSTALLATION CHARGES – INCLUSION & EXCLUSION

INCLUSIONS

- Deputation of skilled manpower for installation
- Travelling charges for technical installation personnel (Single Visit)
- Tools & Tackles required for installation
- Transportation of Tools & Tackles and associated items required for installation
- Warranty 12 Months from the date of Installation

EXCLUSIONS

- Local Transportation for technical installation personnel at site
- Boarding & Lodging charges of technical installation personnel (Executive Grade)
- Providing AC Tent for installation of Straight Joint/ Scaffolding for Termination
- Arrangement of Local Manpower for support during installation
- Arrangement of LPG Gas, Adequate Lighting and Drinking Water
- Arrangement of uninterrupted power supply at site
- Obtaining necessary local permissions, if required
- Lifting arrangement such as crane etc. should be provided at site
- Cleaning Consumable required for installation
- Providing Safety barricading at project site (barrier boards / caution tape)
- Testing & Commissioning – All Testing & Commissioning activities including Cable Sheath test etc.
- Disposal of Cut length of cable and scrap materials

Civil Work:

- Construction of Jointing Bay
- Digging and Back filling Joint Bay
- All fabrication work for supporting cable for installation of termination

Link Box:

- Civil work required for Installation of Link Box
- Mounting of Link Boxes
- Cable and connectors for link box connection to be provided at site

GIS Termination:

- Dismantling the switchgear casing for the cable termination to enable mounting of the GIS Cable terminations
- Filling of SF₆ gas in switchgear
- Performing DC test (including arrangement of DC test set)
- Proper sealing of Cable ends to be provided by customer
- Duly covered Scaffolding for carrying out installation

Outdoor Termination:

- Cable must be laid properly upto the Outdoor structure
- Cable must be properly fixed by cleats onto the Outdoor structure
- Cable ends to be properly sealed
- Duly covered Scaffolding for carrying out installation
- Mounting/Lifting of termination

Straight Joint:

- Laying of Cable inside the jointing bay – cable should be laid straight without any bend inside the jointing bay
- Cable ends should be properly sealed to prevent ingress of moisture and foreign particles inside the cable
- Phase sequencing of cables to be done and identification of phases with proper marking to be done

INSTALLATION CHARGES – TERMS & CONDITIONS

1	Price	Installation Charges mentioned is Net value excluding of all taxes and duties applicable in India
2	MOQ	LVCA - 100 nos.; MVCA-50 nos.; HVCA-24 nos., EHVCA- 6 nos.
3	Service Payment Terms	100% as interest free advance along with Purchase Order
4	Idling Charges	In the event work front (project site) is not made available to RRL team for carrying out installation services, Idling charges at the rate of Rs. 10000 per man-day will be charged.
5	Installation/ Mobilization	Installation schedule for the installation work to be provided 30 days prior to the actual commencement of work.1
6	Variations	The prices quoted by RRL is considering the entire quantity of cable accessories to be installed as per quantity mentioned in this contract. Should there be any changes/ variations in the quantity/ specification, our offer shall be subject to revision.
7	Warranty	We warrant against any defects on account of improper installation for a period of 12 months from the date of installation. In the event of any failure due to improper installation / bad workmanship and reasons solely attributable to RRL scope of work, RRL shall undertake to repair / re-install the defective cable joint/termination on Free of Cost basis. However, the liability to be limited to only installation of the defective cable joint and any associated civil work shall not be part of RRL.
8	Consequential Damage	Unless otherwise specified, RRL shall not be responsible for and nor shall be liable for indirect/consequential losses and damages, suffered by client, including for loss of use, loss of profit whether such liability or claims are based upon any negligence on the part of the client or its employees in connection with the performance of the Service Order.
9	Offer Validity	30 days from the date of offer submission
10	Price Validity	One year from the date of Work Order



Build to Print (Customization)

Your reliable partner with expertise in manufacturing

Simple Machining | Precision Machining | Casting | Sheet Metal | Fabrication



**Combining manufacturing
with leading technology**

"We offer one stop solution platform for all your customized parts requirement with our expertise in various segments of capabilities like precision machining, forging, casting, sheet-metal, fabrication, heat treatment, surface treatment and other process.

Our range covers components from the areas of mechanical, hydraulic, precision measurement, Sensor technology, electrical drive system and control technology.

Why wait? Contact us now.

Follow us on: [!\[\]\(a82deea021790c3e89ca1533ff0c410c_img.jpg\)](#) [!\[\]\(5b18344ce66f13b668d05bc1a37002d0_img.jpg\)](#) [!\[\]\(71aedbd0c10e765819c102ec535a7546_img.jpg\)](#) [!\[\]\(64fa0a44bf130cf34b6c7fa9f9e78b0c_img.jpg\)](#) [!\[\]\(95e0d38120fcefc60b166b10df78c16b_img.jpg\)](#)

DISCONTINUED PRODUCTS

Energy Products

- Cable Gland
- Carrier Strips
- Alphanumeric Characters
- Two-Way Splice Connectors
- One Hole Lugs - Standard Barrel - Model RL

GENERAL TERMS

All List Price are exclusive of GST & other taxes as applicable.
Prices are subject to revision without notice.

WARRANTY POLICY

All the products listed in the price list carry a warranty, For a period of eighteen (18) months from the date of dispatch, or twelve (12) months from the date of Installation, whichever is earlier, Raychem RPG, in its sole discretion, will repair or supply a replacement or accept a return of any product that Raychem RPG and Buyer mutually agree contains a defect in material and workmanship.

Raychem RPG's warranty obligations shall be subject to and contingent upon the following:

1. The product shall be installed in accordance with Raychem RPG's instructions, in accordance with any other applicable instructions (to the extent not in conflict with Raychem RPG's instructions), and in accordance with good industry practice, and;
2. In event of any claim pursuant to this warranty, Raychem RPG shall be promptly notified and provided an opportunity to inspect such product as installed, and Raychem RPG shall have the right to retain for its own use and testing and product replaced.

Except as provided in the preceding paragraphs, Raychem RPG makes no warranties of any kind whatsoever, either express or implied, including without purpose. Raychem RPG's sole liability to buyer shall be for a repair or replacement of product, or to credit buyer's account, as set forth above, and in no event will Raychem RPG be liable for expenses, liabilities or losses associated with the Installation or removal of product, or the Installation for loss of profits, loss of use, or incidental, interest, consequential or special damages of any kind.

The warranty is however subject to the provision of proper usage, efficient maintenance and does not cover defects arising out of fire, accident, inefficient maintenance, faulty operation and wilful or accidental damage. The user needs to take adequate precautions to eliminate these conditions. The manufacturer shall not be liable for any consequential loss, injury, or damages attributable to defect or failure of its products.



OFFICE

HEAD OFFICE

Raychem RPG (P) Ltd.
A-1401, 14th Floor, ThaneOne,
DIL Complex, Majiwada,
Thane (West) 400610

REGIONAL CONTACTS

New Delhi

C/O Innov8, 2nd Floor, Regal Building
44, Connaught Circle,
Hanuman Road Area,
Connaught Place, New Delhi 110001
(Opposite: Palika Parking/Above CCD)

Karnataka

Ground, Beech, Manyata
Embassy Business Park,
Outer Ring Rd, E-1, Nagavara,
Bengaluru, Karnataka 560045

Chennai

Olympia Platina 9th Floor,
Plot No. 33-B, South Phase,
Guindy Industrial Estate,
Chennai 600 032

Kolkata

Urban Wrk- Techno Polis,
8th, BP Block, Sector V,
Bidhannagar, Kolkata,
West Bengal 700091

To learn more about Raychem RPG solutions
and offering visit www.raychemrpg.com
Or reach our Customer Interaction Cell
Contact: **022-45745060**
Email: cic@raychemrpg.com

Follow us on :



Disclaimer

- Product improvement is a continuous process.
For the latest information and special application, please contact
any of our offices listed here.
- Product photographs shown for representative purpose only.